

# 155Mbps 1X9 SC Duplex Receptacle Transceiver Module for ATM, SONET OC-3/SDH STM-1, Fast Ethernet

## OPT-155A2H1

### Transmitter Performance Specifications:

Parameter	Symbol	Min.	Typ.	Max.	Unit	Reference
Power supply voltage	V <sub>CC</sub>	3.135	3.3	3.465	V	
Supply current	I <sub>CC</sub>			200	mA	
Output optical power (avg.)	P <sub>O</sub>	-20		-14	dBm	Note (1)
Optical extinction ratio		9			dB	Note (1)
Center wavelength	λ <sub>c</sub>		1310		nm	
Spectral width	Δλ			200	nm	
Optical risetime	t <sub>r</sub>	0.6		3.0	ns	Note (2)
Optical falltime	t <sub>f</sub>	0.6		3.0	ns	Note (2)
Duty Cycle Distortion	DCD			0.6	ns	
Jitter				1.0	ns	

Note (1). Measured at the end of 5 meters of 62.5/125 um Graded index fiber using 155Mbps, PRBS 2<sup>23</sup>-1 signal at the beginning of life

Note (2). These are 10%~90% values

### Receiver Performance Specifications:

Parameter	Symbol	Min.	Typ.	Max.	Unit	Reference
Power supply voltage	V <sub>CC</sub>	3.135	3.3	3.465	V	
Supply current	I <sub>CC</sub>			100	mA	
Data output voltage-Low	V <sub>OL</sub> - V <sub>CC</sub>	-1.85		-1.47	V	
Data output voltage-High	V <sub>OH</sub> - V <sub>CC</sub>	-1.16		-0.88	V	
Optical input sensitivity (avg.)	P <sub>IN</sub>			-31	dBm	Note (1)
Optical input saturation (avg.)	P <sub>SAT</sub>	-14			dBm	Note (1)
Optical wavelength	λ		1310		nm	
Output risetime	t <sub>r</sub>	0.35		2.2	ns	Note (2)
Output falltime	t <sub>f</sub>	0.35		2.2	ns	Note (2)
Jitter				1.0	ns	
Signal detect- Assert	P <sub>A</sub>			-33	dBm	
Signal detect- Deassert	P <sub>D</sub>	-48			dBm	
Signal detect Hysteresis	P <sub>A</sub> -P <sub>D</sub>	0.5			dB	

Note (1). With BER better than or equal 1x10<sup>-10</sup>, measured in the center of the eye opening with 2<sup>23</sup>-1 PRBS at 155Mbps

Note (2). These are 20%~80% values


 <b>DELTA ELECTRONICS, INC.</b>	TITLE			DATE:	
	OPT-155A2H1			22. Feb.2002	
	WRITTEN	CHECKED	APPROVED	DOCUMENT NO:	REV:
James Cheng	Teddy Kuo	YY. Tsai			

# 155Mbps 1X9 SC Duplex Receptacle Transceiver Module for ATM, SONET OC-3/SDH STM-1, Fast Ethernet

## OPT-155A2H1


### Connection Diagram

Receiver Signal Ground  
Receiver Data Out  
Receiver Data Out Bar  
Receiver Signal Detect  
Receiver Power Supply  
Transmitter Power Supply  
Transmitter Data In Bar  
Transmitter Data In  
Transmitter Signal Ground

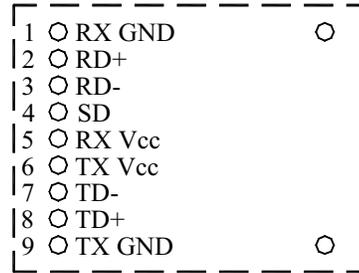


Top View

### Recommended Circuit Schematic

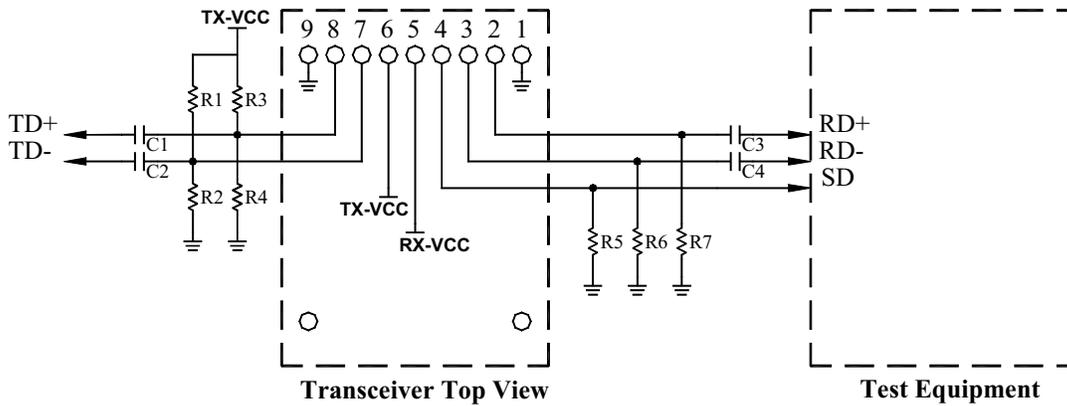

Note:  
R1=R3=82 Ω  
R2=R4=130 Ω  
R5=270 Ω  
R6=R7=150 Ω  
C1=C2=C3=C4=C6=C8=100 nF  
C5=100 μF  
C7=C9=10 μF  
L1=L2=15 μH or ferrite inductor

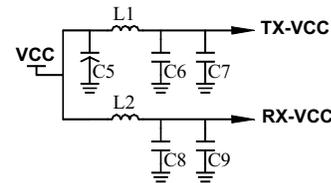


 <b>DELTA ELECTRONICS, INC.</b>	TITLE			DATE:
	OPT-155A2H1			22. Feb.2002
	WRITTEN	CHECKED	APPROVED	DOCUMENT NO:
James Cheng	Teddy Kuo	YY. Tsai		

# 155Mbps 1X9 SC Duplex Receptacle Transceiver Module for ATM, SONET OC-3/SDH STM-1, Fast Ethernet

## OPT-155A2H1

### Mechanical Dimensions

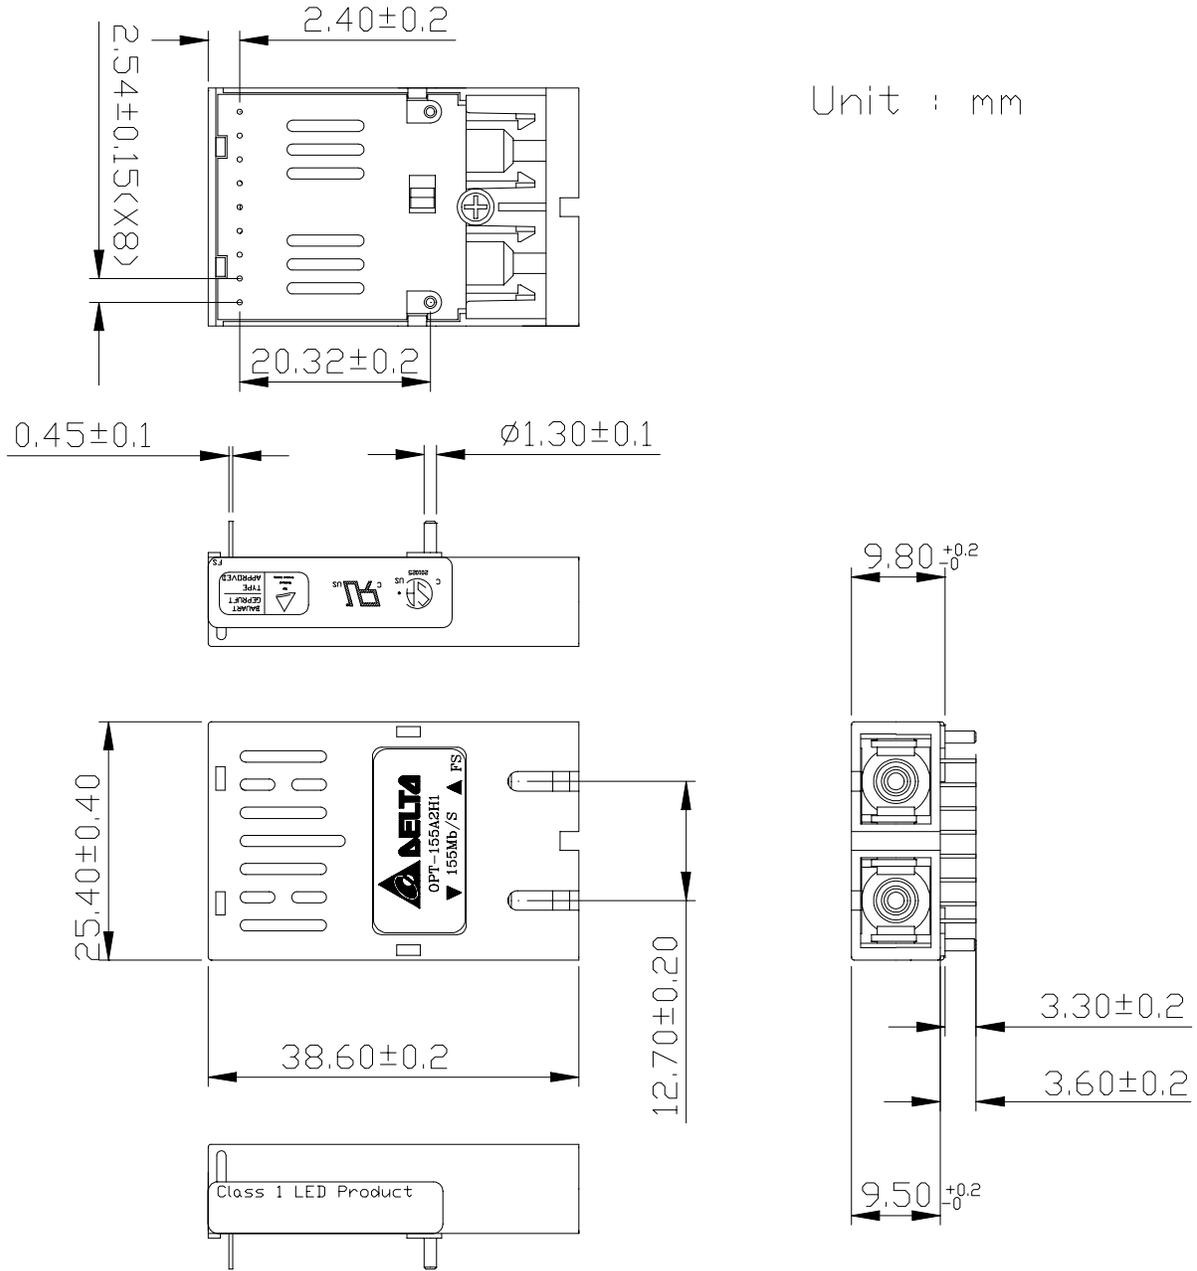

 <b>DELTA ELECTRONICS, INC.</b>	TITLE			DATE:
	OPT-155A2H1			22. Feb.2002
	WRITTEN	CHECKED	APPROVED	DOCUMENT NO:
James Cheng	Teddy Kuo	YY. Tsai		

# 155Mbps 1X9 SC Duplex Receptacle Transceiver Module for ATM, SONET OC-3/SDH STM-1, Fast Ethernet

## OPT-155A2H1

Test Item	Reference	Qty'	Evaluation
(#1) Electromagnetic Interference EMC	FCC Class B EN 55022 Class B CISPR 22	5	(1) Satisfied with electrical characteristics of product spec.  (2) No physical damage
(#2) Immunity : Radio Frequency Electromagnetic Field	EN 61000-4-3 IEC 1000-4-3	5	
(#3) Immunity : Electrostatic Discharge to the Duplex SC Receptacle	EN 61000-4-2 IEC 1000-4-2 IEC 801.2	5	
(#4) Electrostatic Discharge to the Electrical Pins	MIL-STD-883C Method 3015.4  EIAJ#1988.3.2B Version 2, Machine model	5	

 <b>DELTA ELECTRONICS, INC.</b>	TITLE			DATE:
	OPT-155A2H1			22. Feb.2002
	WRITTEN	CHECKED	APPROVED	DOCUMENT NO:
James Cheng	Teddy Kuo	YY. Tsai		