

PRODUCT NUMBER
95293-XXX-XXLF

RoHS COMPATIBLE, SEE NOTE 6
TOTAL NB OF POSITIONS, 3 TO 17
PACKAGING TYPE, NOTE 3

PLATING



- 1 = 0.76µm GOLD/GXT ON CONTACT AREA, 2µm MATTE TIN MIN ON TAILS
- 4 = 2.0µm MATTE TIN MIN FULL PLATED
- 5 = 0.25µm GOLD/GXT ON CONTACT AREA, 2µm MATTE TIN MIN ON TAILS
- 8 = 0.38µm GOLD/GXT ON CONTACT AREA, 2µm MATTE TIN MIN ON TAILS
- 1.27µm NICKEL MIN UNDERLAYER FOR ALL PLATING VERSIONS

CATALOGUE RANGE	
PIN STYLE	MATING
01	5.84
02	8.08

APPLICATION SPECIFIC	
PIN STYLE	MATING
05	9.60
06	3.00
07	11.20

NOTES:

- 1 - HOUSING MAT'L: HIGH TEMPERATURE THERMOPLASTIC: UL94V-0 COLOR: BLACK
- 2 - PIN MATERIAL: PHOSPHOR BRONZE
- 3 - PACKAGING
 - POLY BAGS
 - B = TUBE + CAP
 - A = TAPE & REEL + CAP, AS AVAILABLE
- 4 - 9N MIN RETENTION IN EITHER DIRECTION
- 5 - TO DETERMINE DIMENSIONS:
 - N = NUMBER OF POSITIONS
 - EXAMPLE: 8 POS N x 2.54 = 20.32mm
6. RoHS COMPATIBLE PRODUCT SPECIFICATIONS
 - a - PLATING:
 - "Lf" MEANS THE PRODUCT IS LEAD-FREE, 2µm MINIMUM MATTE TIN OVER 1.27µm MINIMUM NICKEL UNDERPLATE.
 - b - MANUFACTURING PROCESS COMPATIBILITY
 - THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 30 SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW OVEN.
 - c - LABELING:
 - MEETS PACKAGING SPECS AS PER GS-14-920
 - d - LEGAL STATEMENT: SEE GS-47-0004

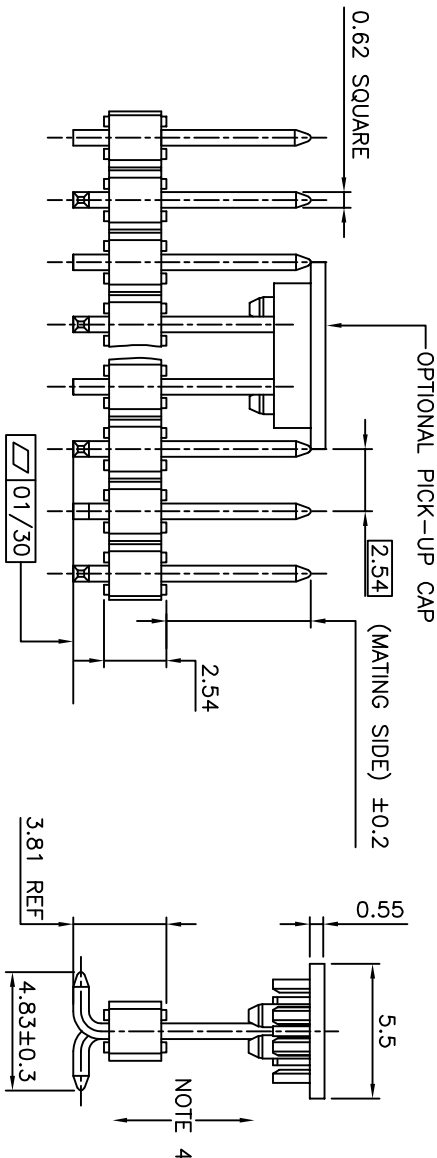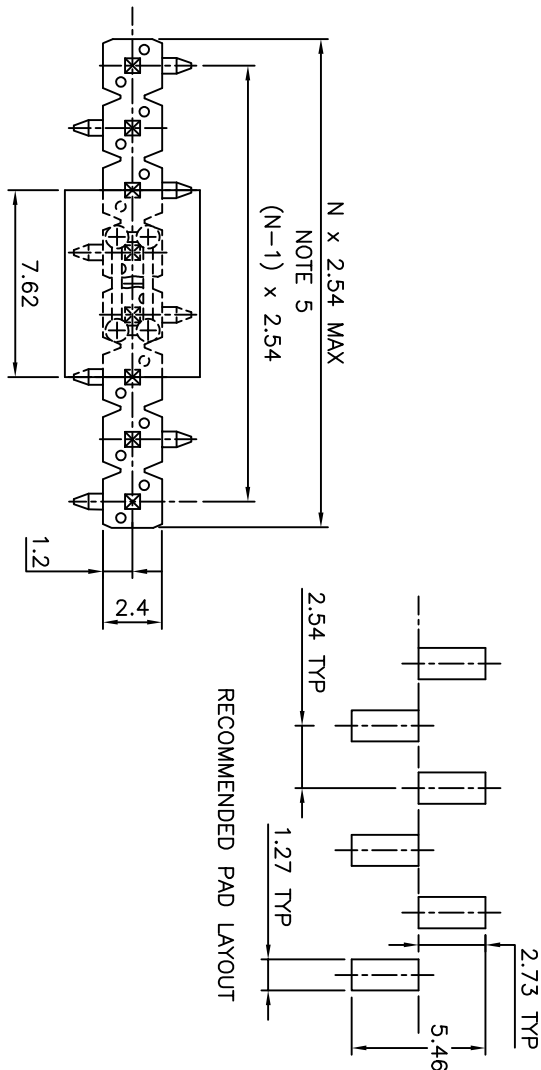

mat'l. code		surface		tolerance		projection		product family	
SEE NOTES	ISO 1302	ISO 406	ISO 1101	tolerance unless otherwise specified	linear	xx ±0.3	mm	title	BERGSTIK
ltr	ecm no	dr	date	angles	linear	xxx ±0.13	mm	UNSHR.HEADER SR SMT 95293 sheet 1 of 1 A3	
P	B-18983	LMU	14.10.03						
R	B-20569	AMA	15.03.26						
S	F-23055	AMA	16.01.15	° #2	xxxx ±0.05	scale 5:1			
T	F-25587	LMU	16.12.08	dr	DLE	01.01.24			
U	F-28279	DDE	17.05.12	lengr	JMC	01.01.24			
V	F-31174	DDE	18.09.05	chr	JMC	01.01.24		type CUSTOMER Drawing	
sheet	revision			qppd	JF.N	01.01.24			
index	sheet								