

High-Bandwidth, Quad DPDT Switches

ABSOLUTE MAXIMUM RATINGS

(All voltages referenced to GND.)

V+	-0.3V to +6V
IN ₋ , EN (MAX4761)	-0.3V to +6V
IN ₋ , EN (MAX4761A)	-0.3V to (V+ + 0.3V)
COM ₋ , NO ₋ , NC ₋ (Note 1)	-0.3V to (V+ + 0.3V)
Continuous Current	
NO ₋ , NC ₋ , COM ₋	±100mA
Peak Current	
(pulsed at 1ms, 10% duty cycle)	±200mA
(pulsed at 1ms, 50% duty cycle)	 ±300mA

Continuous Power Dissipation (T_A = +70°C)

36-Bump UCSP (derate 15.3mW/°C above +70°C)....	1221mW
36-Pin TQFN (derate 26.3mW/°C above +70°C).....	2105mW
Operating Temperature Range	-40°C to +85°C
Junction Temperature.....	+150°C
Storage Temperature Range	-65°C to +150°C
Lead Temperature (soldering, 10s)	+300°C
Bump Temperature (soldering)	
Infrared (15s)	+220°C
Vapor Phase (60s)	+215°C

Note 1: Signals on NO₋, NC₋, COM₋ exceeding V+ or GND are clamped by internal diodes. Limit forward-diode current to maximum current rating.

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

ELECTRICAL CHARACTERISTICS

(V+ = +2.7V to +5.25V, T_A = -40°C to +85°C, unless otherwise noted. Typical values are at V+ = 3V, T_A = +25°C.) (Notes 2, 3)

PARAMETER	SYMBOL	CONDITIONS	T _A	MIN	TYP	MAX	UNITS		
ANALOG SWITCH									
Analog Signal Range	V _{COM_} , V _{NO_} , V _{NC_}		T _{MIN} to T _{MAX}	0		V+	V		
On-Resistance	R _{ON}	V+ = 2.7V, I _{COM_} = 10mA, V _{NC_} or V _{NO_} = 0V or V+ (Note 4)	+25°C		2.0	3.5	Ω		
			T _{MIN} to T _{MAX}			4			
On-Resistance Match Between Channels	ΔR _{ON}	V+ = 2.7V, I _{COM_} = 10mA, V _{NO_} or V _{NC_} = 1.5V (Notes 4, 5)	+25°C		0.2	0.4	Ω		
			T _{MIN} to T _{MAX}			0.55			
On-Resistance Flatness	R _{FLAT(ON)}	V+ = 2.7V, I _{COM_} = 10mA, V _{NC_} or V _{NO_} = 0V or V+ (Note 6)	+25°C		0.8	1.5	Ω		
			T _{MIN} to T _{MAX}			1.8			
NO_, NC_ Off-Leakage Current	I _{NO_(OFF)} , I _{NC_(OFF)}	V+ = 3.6V; V _{COM_} = 3.3V, 0.3V; V _{NO_} or V _{NC_} = 0.3V, 3.3V	+25°C	-5		+5	nA		
			T _{MIN} to T _{MAX}	-25		+25			
COM_ Off-Leakage Current		V+ = 3.6V (MAX4761/MAX4761A); V _{COM_} = 3.3V, 0.3V; V _{NO_} or V _{NC_} = 0.3V, 3.3V	+25°C	-5	0.1	+5	nA		
			T _{MIN} to T _{MAX}	-25		+25			
COM_ On-Leakage Current	I _{COM_(ON)}	V+ = 3.6V; V _{COM_} = 3.3V, 0.3V; V _{NO_} or V _{NC_} = 3.3V, 0.3V or unconnected	+25°C	-5		+5	nA		
			T _{MIN} to T _{MAX}	-25		+25			
DYNAMIC									
Turn-On Time	t _{ON}	V _{NO_} or V _{NC_} = 1.5V; R _L = 50Ω; C _L = 35pF, Figure 2	MAX4760/ MAX4761	+25°C		45	140	ns	
				T _{MIN} to T _{MAX}			150		
			MAX4760A/ MAX4761A	+25°C			400	800	ns
				T _{MIN} to T _{MAX}				800	

High-Bandwidth, Quad DPDT Switches

ELECTRICAL CHARACTERISTICS (continued)

(V+ = +2.7V to +5.25V, T_A = -40°C to +85°C, unless otherwise noted. Typical values are at V+ = 3V, T_A = +25°C.) (Notes 2, 3)

PARAMETER	SYMBOL	CONDITIONS		TA	MIN	TYP	MAX	UNITS
Turn-Off Time	tOFF	V+ = 2.7V, VNO_ or VNC_ = 1.5V; RL = 50Ω; CL = 35pF, Figure 2	MAX4760/ MAX4761	+25°C		25	50	ns
				TMIN to TMAX		60		
			MAX4760A/ MAX4761A	+25°C		300	800	ns
				TMIN to TMAX		800		
Break-Before-Make	tBBM	V+ = 2.7V, VNO_ or VNC_ = 1.5V; RL = 50Ω, CL = 35pF, Figure 3 (Note 7)		+25°C		100		ns
				TMIN to TMAX		2		
Skew	tsKEW	RS = 39Ω, CL = 50pF, Figure 4 (Note 7)		+25°C		0.2		ns
Charge Injection	Q	VGEN = 0V, RGEN = 0V, CL = 1.0nF, Figure 5		+25°C		15		pC
On-Channel -3dB Bandwidth	BW	Signal = 0dBm, CL = 5pF, RL = 50Ω		+25°C		150		MHz
Off-Isolation	VISO	CL = 5pF, RL = 50Ω, VCOM_ = 1VP-P, f = 100kHz, Figure 6 (Note 8)		+25°C		80		dB
Crosstalk	VCT	CL = 5pF, RL = 50Ω, VCOM_ = 1VP-P, f = 100kHz, Figure 6 (Note 9)		+25°C		95		dB
Total Harmonic Distortion	THD	f = 20Hz to 20kHz , VCOM_ = 1VP-P, DC bias = V+/2, RL = RS = 600Ω		+25°C		0.03		%
NO_, NC_ Off-Capacitance	CNO_(OFF), CNC_(OFF)	VNO_, VNC_ = GND, f = 1MHz, Figure 7		+25°C		25		pF
COM_ On-Capacitance	CCOM(ON)	VNO_, VNC_ = GND, f = 1MHz, Figure 7		+25°C		54		pF
COM_ Off-Capacitance	CCOM(OFF)	VCOM_ = GND, f = 1MHz (MAX4761/ MAX4761A), Figure 7		+25°C		25		pF
DIGITAL I/O (IN_, EN)								
Input-Logic High	VIH	V+ = 2.7V to 3.6V		TMIN to TMAX		1.4		V
		V+ = 3.6V to 5.5V (MAX4760A/MAX4761A)		TMIN to TMAX		1.6		
		V+ = 3.6V to 5.25V (MAX4760/MAX4761)		TMIN to TMAX		2.0		
Input-Logic Low	VIL	V+ = 2.7V to 3.6V		TMIN to TMAX		0.5		V
		V+ = 3.6V to 5.5V (MAX4760A/MAX4761A)		TMIN to TMAX		0.5		
		V+ = 3.6V to 5.25V (MAX4760/MAX4761)		TMIN to TMAX		0.6		
Input Leakage Current	IIN, IEN	VIN = 0V or V+		TMIN to TMAX		1		μA

MAX4760/MAX4760A/MAX4761/MAX4761A

High-Bandwidth, Quad DPDT Switches

ELECTRICAL CHARACTERISTICS (continued)




(V+ = +2.7V to +5.25V, TA = -40°C to +85°C, unless otherwise noted. Typical values are at V+ = 3V, TA = +25°C.) (Notes 2, 3)

PARAMETER	SYMBOL	CONDITIONS	TA	MIN	TYP	MAX	UNITS
POWER SUPPLY							
Power-Supply Range	V+		TMIN to TMAX	1.8		5.5	V
Power Supply Current	I+	V+ = 4.3V, VIN_ = 0V or V+ (MAX4760/MAX4761)	+25°C		0.01		μA
			TMIN to TMAX			1.0	
		V+ = 5.5V, VIN_ = 0V or V+ (MAX4760A/MAX4761A)	+25°C		0.01		
			TMIN to TMAX			1.0	
		V+ = 5.5V, VIN_ = 1.8V (MAX4760A/MAX4761A)	+25°C		5.5		
			TMIN to TMAX			12	

- Note 2:** The algebraic convention is used in this data sheet; the most negative value is shown in the minimum column.
- Note 3:** UCSP packages are 100% tested at +25°C and limits across the full temperature range are guaranteed by correlation and design. TQFN packages are 100% tested at +85°C and limits across the full temperature range are guaranteed by correlation and design.
- Note 4:** RON and ΔRON matching specifications are guaranteed by design.
- Note 5:** ΔRON = RON(MAX) - RON(MIN).
- Note 6:** Flatness is defined as the difference between the maximum and minimum value of on-resistance as measured over the specified analog signal ranges.
- Note 7:** Guaranteed by design, not production tested.
- Note 8:** Off-isolation = 20log10 [VCOM_/(VNO_ or VNC_)], VCOM_ = output, VNO_ or VNC_ = input to off switch.
- Note 9:** Between any two switches.

Typical Operating Characteristics

(V+ = 3V, TA = +25°C, unless otherwise noted.)

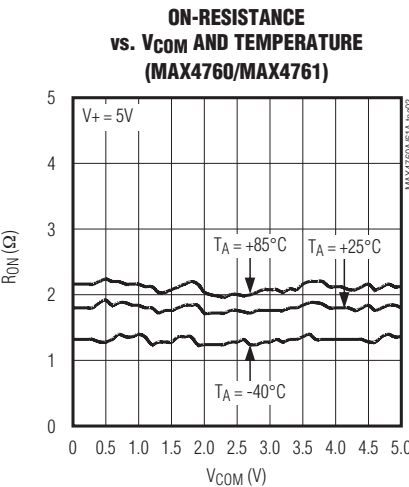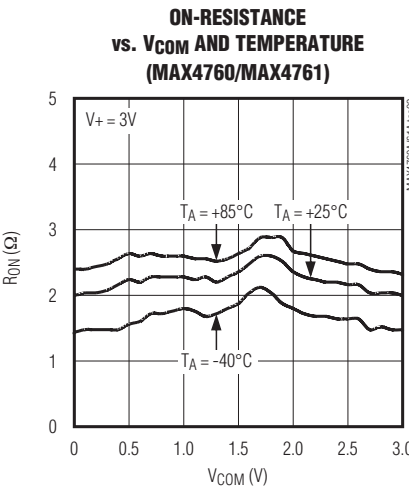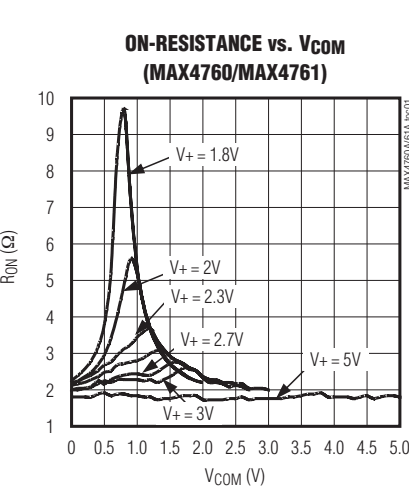


High-Bandwidth, Quad DPDT Switches

Typical Operating Characteristics (continued)


($V_+ = 3V$, $T_A = +25^\circ C$, unless otherwise noted.)

MAX4760/MAX4760A/MAX4761/MAX4761A


ON-RESISTANCE vs. V_{COM}
(MAX4760A/MAX4761A)

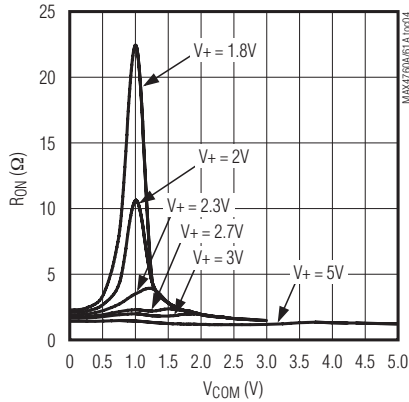


ON-RESISTANCE vs. V_{COM} AND TEMPERATURE
(MAX4760A/MAX4761A)

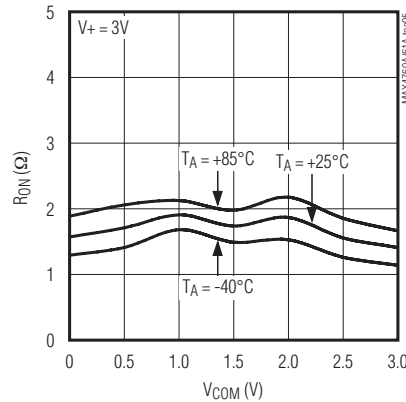


ON-RESISTANCE vs. V_{COM} AND TEMPERATURE
(MAX4760A/MAX4761A)

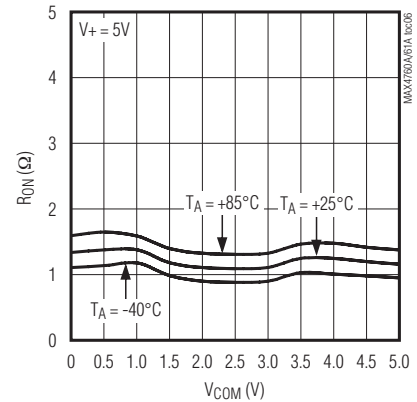


NO/NC OFF-LEAKAGE CURRENT vs. TEMPERATURE

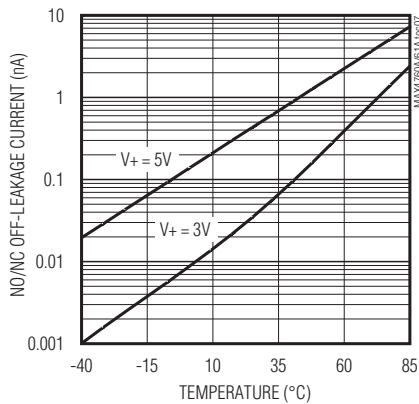


COM ON-LEAKAGE CURRENT vs. TEMPERATURE

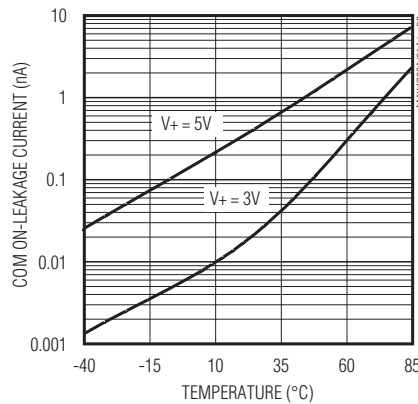


COM OFF-LEAKAGE CURRENT vs. TEMPERATURE

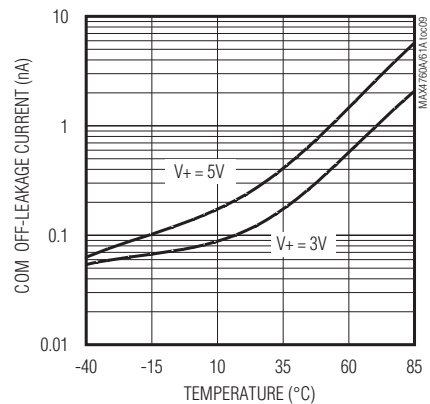


CHARGE INJECTION vs. V_{COM}

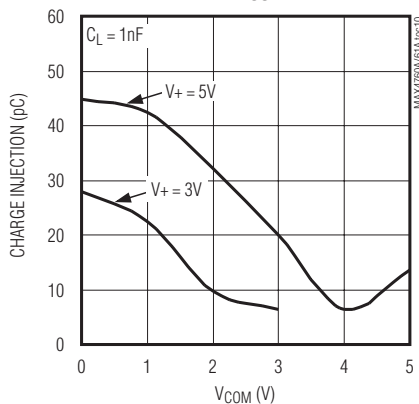

SUPPLY CURRENT vs. SUPPLY VOLTAGE

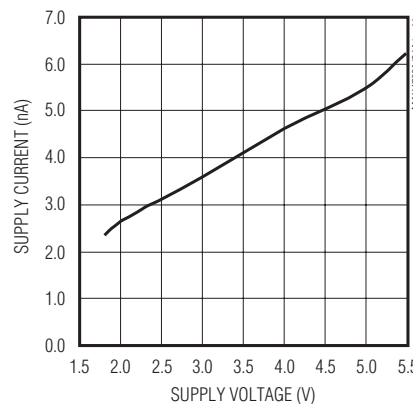








SUPPLY CURRENT vs. TEMPERATURE

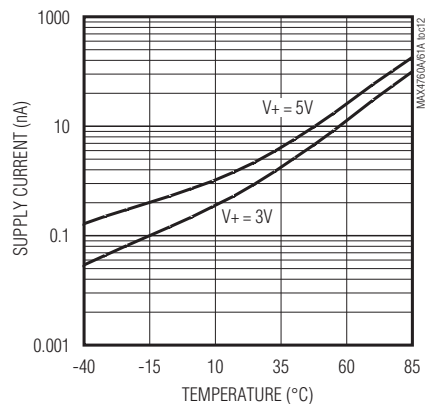

High-Bandwidth, Quad DPDT Switches

Typical Operating Characteristics (continued)

($V_+ = 3V$, $T_A = +25^\circ C$, unless otherwise noted.)

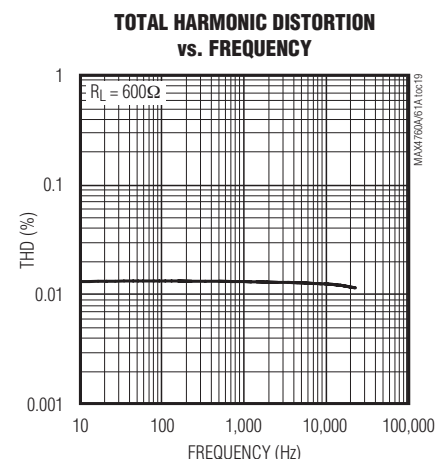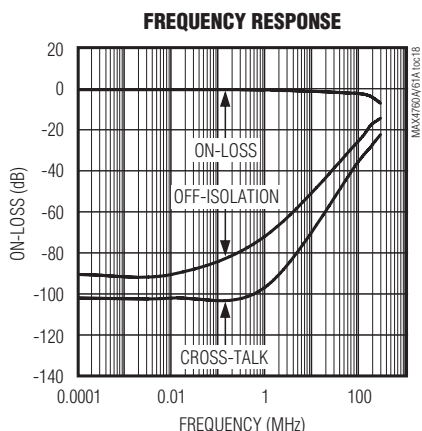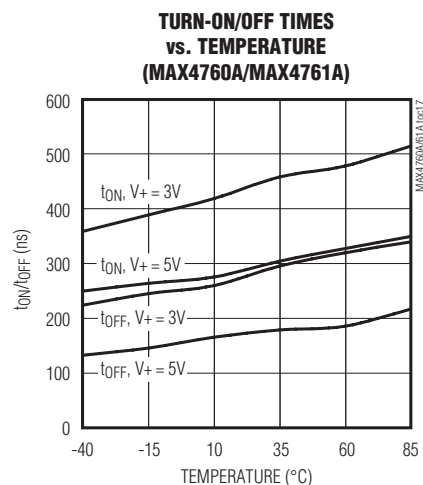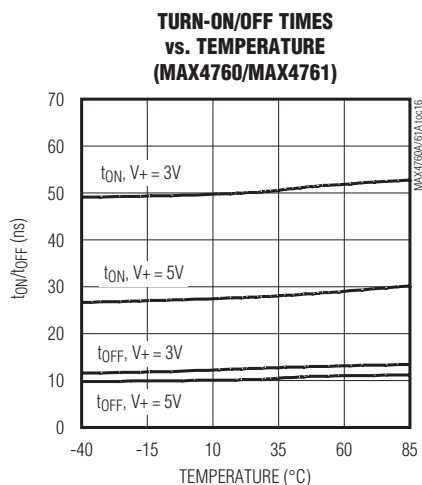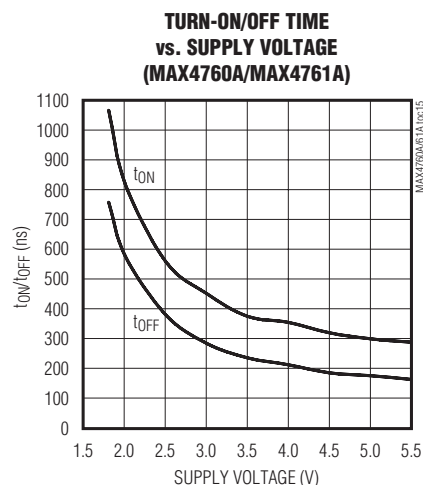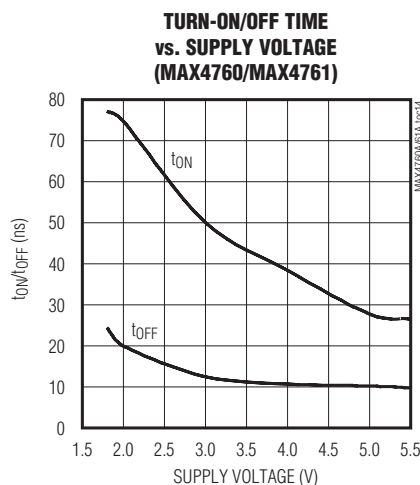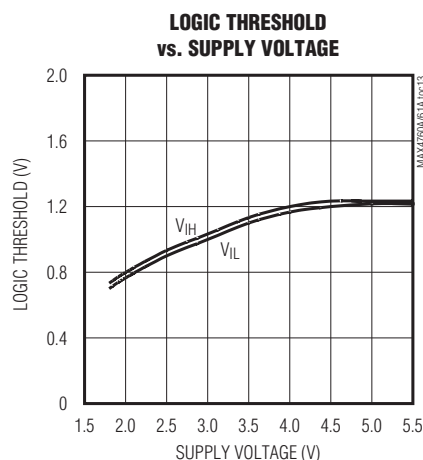

High-Bandwidth, Quad DPDT Switches

Pin Description

PIN				NAME	FUNCTION
MAX4760/MAX4760A		MAX4761/MAX4761A			
TQFN-EP	UCSP	TQFN-EP	UCSP		
1	A1	1	A1	NC1	Analog Switch 1, Normally Closed Terminal 1
2	B2	2	B2	COM2	Analog Switch 2, Common Terminal 2
3	A2	3	A2	NC2	Analog Switch 2, Normally Closed Terminal 2
4	A3	4	A3	INA	Logic Control Digital Input for the MAX4760/MAX4760A Switch 1 and Switch 2. Digital control input for all MAX4761/MAX4761A switches.
5	C3, D4	5	C3, D4	V+	Positive Supply Voltage
6	A4	—	—	INB	Logic Control Digital Input for Switches 3 and 4
7	A5	7	A5	NC3	Analog Switch 3, Normally Closed Terminal 3
8	B5	8	B5	COM3	Analog Switch 3, Common Terminal 3
9	A6	9	A6	NC4	Analog Switch 4, Normally Closed Terminal 4
10	B6	10	B6	COM4	Analog Switch 4, Common Terminal 4
11, 14, 17, 29, 32, 35	—	6, 11, 14, 17, 24, 29, 32, 35	A4, F3	N.C.	No Connection. Leave N.C. unconnected.
12	C5	12	C5	NO3	Analog Switch 3, Normally Open Terminal 3
13	C6	13	C6	NO4	Analog Switch 4, Normally Open Terminal 4
15	D6	15	D6	NO8	Analog Switch 8, Normally Open Terminal 8
16	D5	16	D5	NO7	Analog Switch 7, Normally Open Terminal 7
18	E6	18	E6	COM8	Analog Switch 8, Common Terminal 8
19	F6	19	F6	NC8	Analog Switch 8, Normally Closed Terminal 8
20	E5	20	E5	COM7	Analog Switch 7, Common Terminal 7
21	F5	21	F5	NC7	Analog Switch 7, Normally Closed Terminal 7
22	F4	—	—	IND	Logic Control Digital Input for Switches 7 and 8
23	C4, D3	23	C4, D3	GND	Ground
24	F3	—	—	INC	Logic Control Digital Input for Switches 5 and 6
25	F2	25	F2	NC6	Analog Switch 6, Normally Closed Terminal 6
26	E2	26	E2	COM6	Analog Switch 6, Common Terminal 6
27	F1	27	F1	NC5	Analog Switch 5, Normally Closed Terminal 5
28	E1	28	E1	COM5	Analog Switch 5, Common Terminal 5
30	D2	30	D2	NO6	Analog Switch 6, Normally Open Terminal 6
31	D1	31	D1	NO5	Analog Switch 5, Normally Open Terminal 5
33	C1	33	C1	NO1	Analog Switch 1, Normally Open Terminal 1
34	C2	34	C2	NO2	Analog Switch 2, Normally Open Terminal 2
36	B1	36	B1	COM1	Analog Switch 1, Common Terminal 1
—	—	22	F4	EN	Output Enable, Active Low
—	—	—	—	EP	Exposed Pad (TQFN Only). Connect EP to GND.

MAX4760/MAX4760A/MAX4761/MAX4761A

High-Bandwidth, Quad DPDT Switches

Detailed Description

The MAX4760/MAX4760A quad double-pole/double-throw (DPDT) and the MAX4761/MAX4761A octal single-pole/double-throw (SPDT) analog switches operate from a single +1.8V to +5.5V supply. These devices are fully specified for +3V applications.

The MAX4760/MAX4760A/MAX4761/MAX4761A have a guaranteed 2.0Ω (typ) on-resistance to switch data or audio signals. The low 54pF (typ) capacitance and 0.2ns change in skew makes them ideal for data switching applications. The MAX4760/MAX4760A have four logic inputs to control two switches in pairs and the MAX4761/MAX4761A have one logic control input and an enable input ($\overline{EN}$) to disable the switches.

Applications Information

Digital Control Inputs

The MAX4760/MAX4760A/MAX4761/MAX4761A logic inputs accept up to +5.5V regardless of the supply voltage. For example, with a +3.3V supply, IN_{-} can be driven low to GND and high to +5.5V, which allows mixed logic levels in a system. Driving the control logic inputs rail-to-rail also minimizes power consumption.

For the MAX4761/MAX4761A, drive $\overline{EN}$ low to enable. When $\overline{EN}$ is high, COM_{-} is high impedance.

Analog Signal Levels

Analog signal inputs over the full voltage range (0V to V_{+}) are passed through the switch with minimal change in on-resistance (see the *Typical Operating Characteristics*). The switches are bidirectional so NO_{-} , NC_{-} , and COM_{-} can be either inputs or outputs.

Power-Supply Bypassing

Power-supply bypassing improves noise margin and prevents switching noise from propagating from the V_{+} supply to other components. A 0.1 μ F capacitor connected from V_{+} to GND is adequate for most applications.

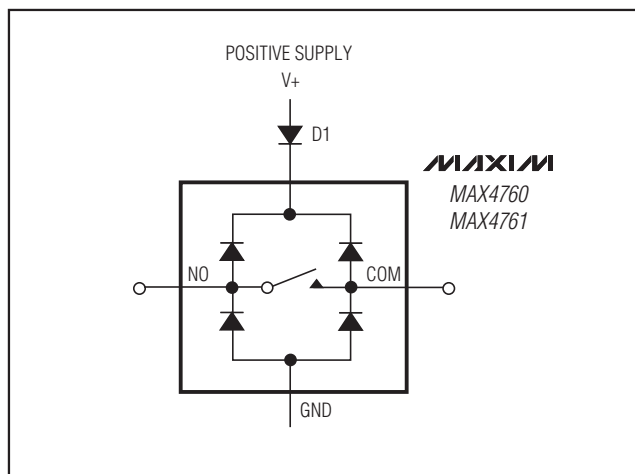


Figure 1. Overvoltage Protection Using an External Blocking Diode

Power-Supply Sequencing

CMOS devices require proper power-supply sequencing. Always apply V_{+} before the analog signals, especially if the input signal is not current limited. If sequencing is not possible, and the input signal is not current limited to less than 20mA, add a small-signal diode (Figure 1). Adding the diode reduces the analog range to a diode drop (0.7V) below V_{+} and increases the on-resistance slightly. The maximum supply voltage must not exceed +6V at any time.

UCSP Applications Information

For the latest application details on UCSP construction, dimensions, tape carrier information, printed circuit board techniques, bump-pad layout, and recommended reflow temperature profile, as well as the latest information on reliability testing results, refer to the Application Note 1891: *Wafer-Level Packaging (WLP) and Its Applications* available on Maxim's website at www.maxim-ic.com/ucsp.

High-Bandwidth, Quad DPDT Switches

Timing Circuits/Timing Diagrams

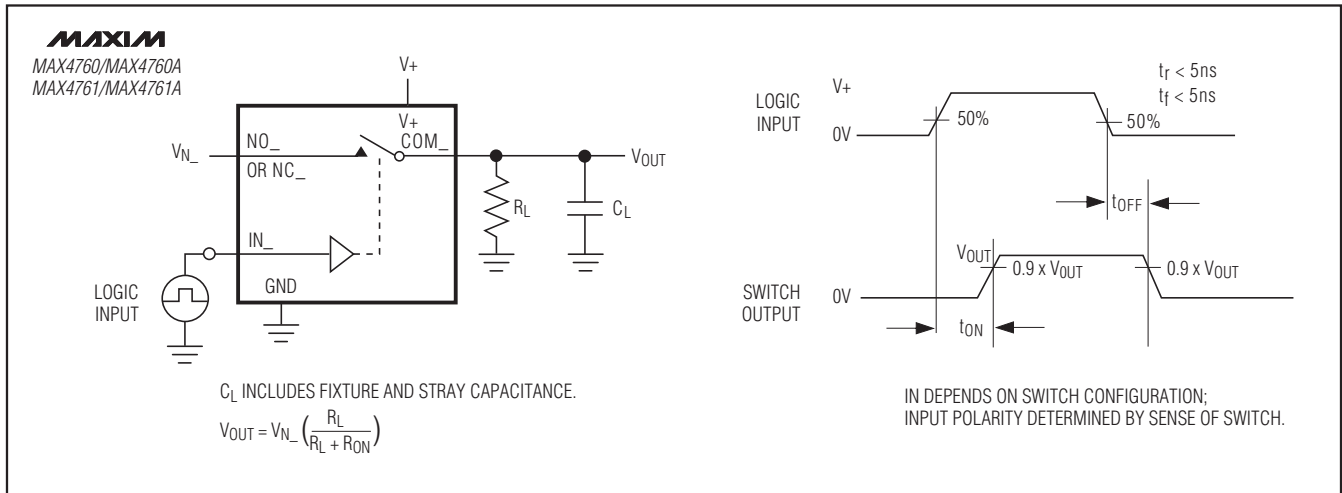


Figure 2. Switching Time

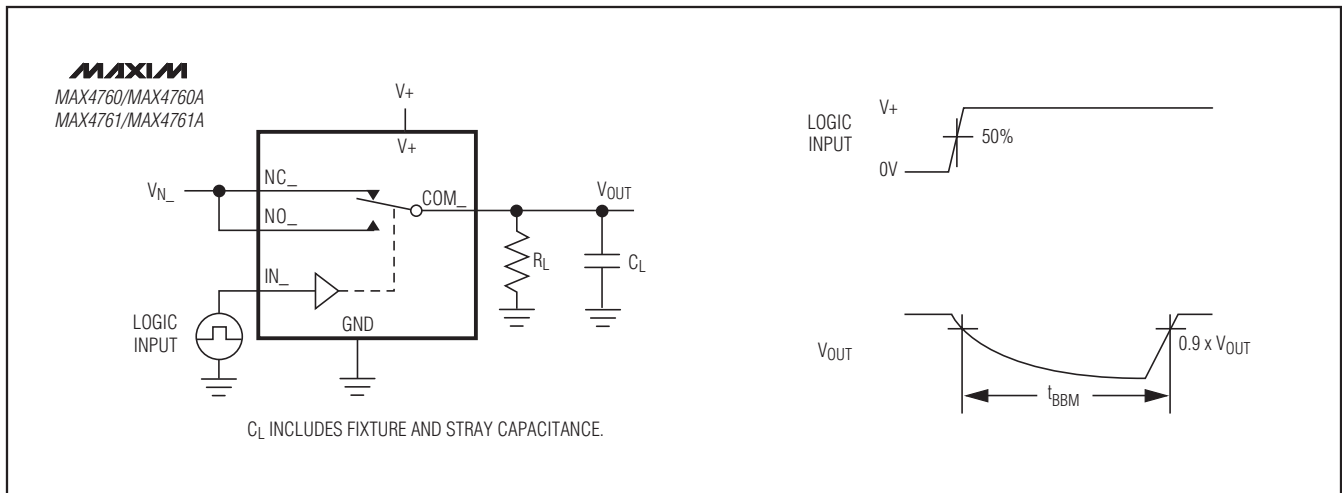


Figure 3. Break-Before-Make Interval

MAX4760/MAX4760A/MAX4761/MAX4761A

High-Bandwidth, Quad DPDT Switches

Timing Circuits/Timing Diagrams (continued)

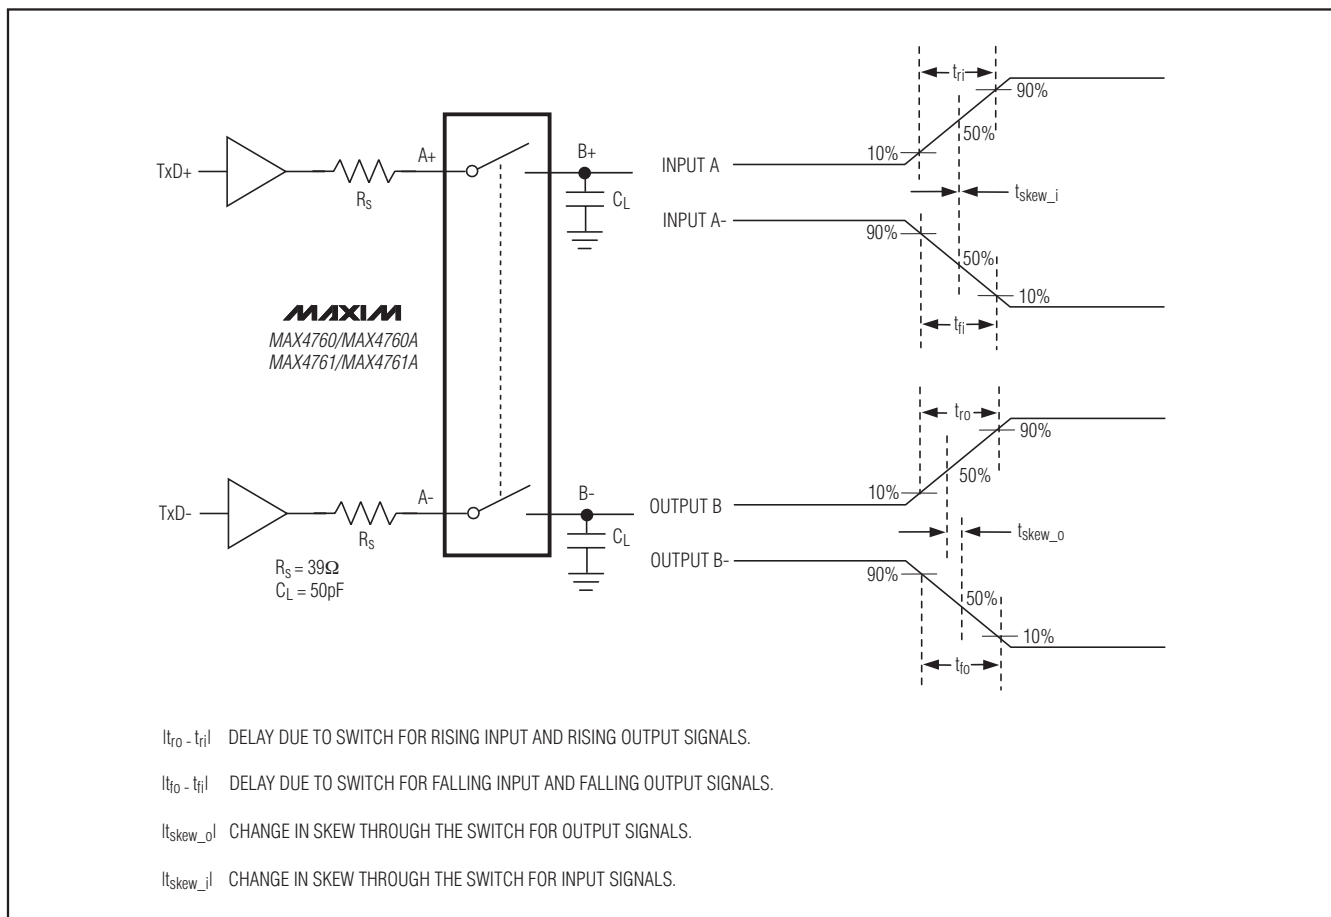


Figure 4. Input/Output Skew Timing Diagram

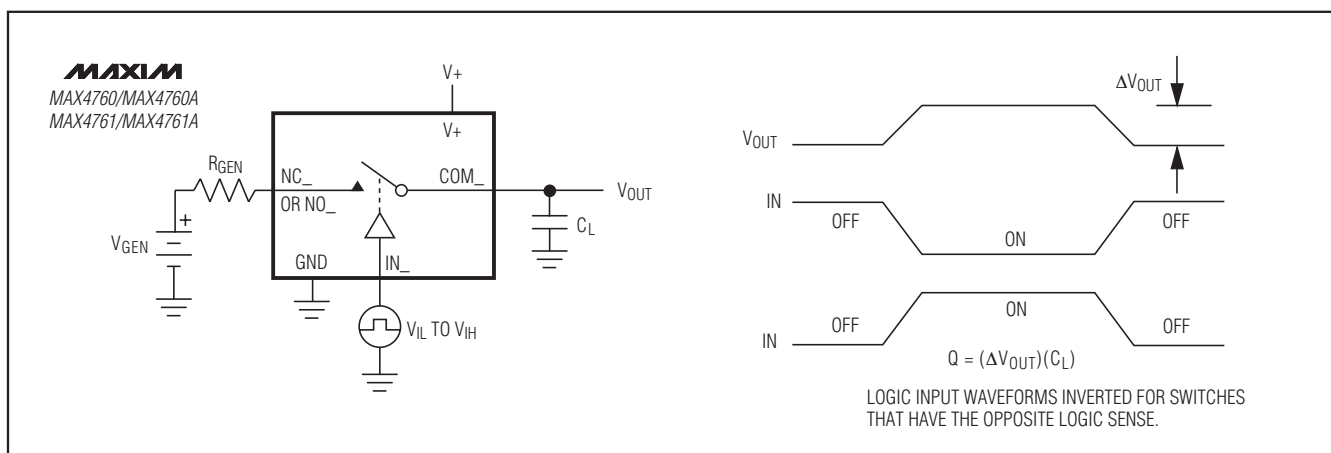


Figure 5. Charge Injection

High-Bandwidth, Quad DPDT Switches

Timing Circuits/Timing Diagrams (continued)

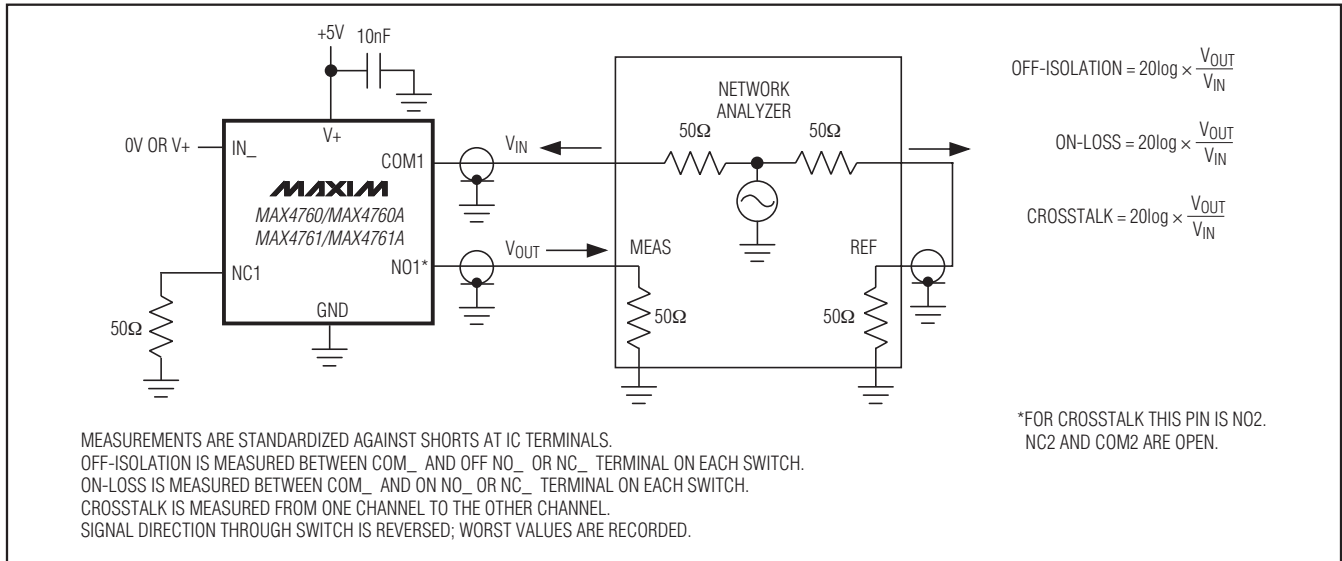


Figure 6. On-Loss, Off-Isolation, and Crosstalk

Typical Operating Circuit


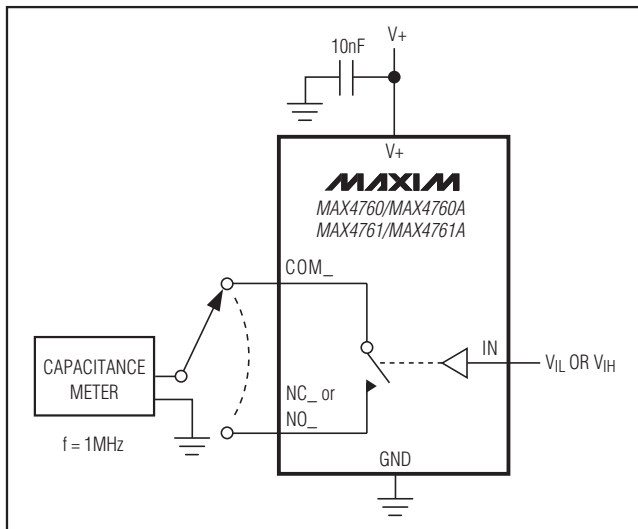


Figure 7. Channel On-/Off-Capacitance

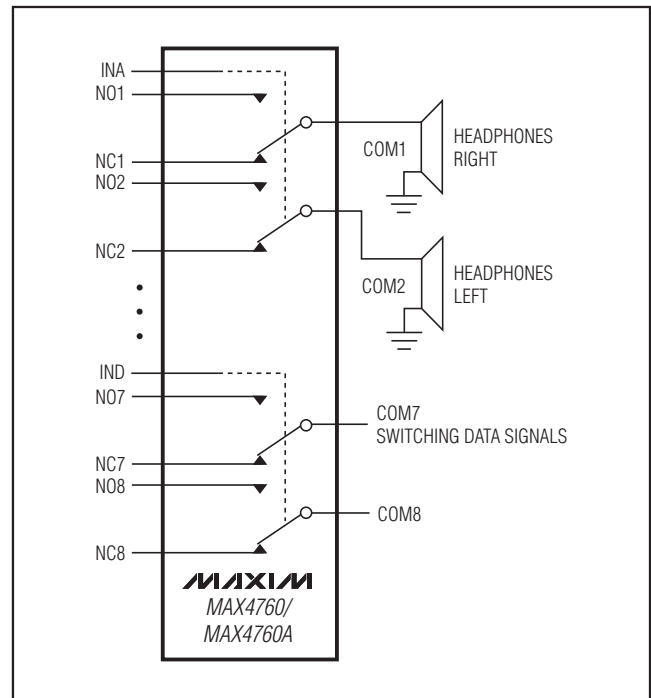

MAX4760/MAX4760A/MAX4761/MAX4761A


High-Bandwidth, Quad DPDT Switches

Pin Configurations/Truth Tables


TOP VIEW

MAXIM
MAX4760/MAX4760A

(BUMP SIDE DOWN)

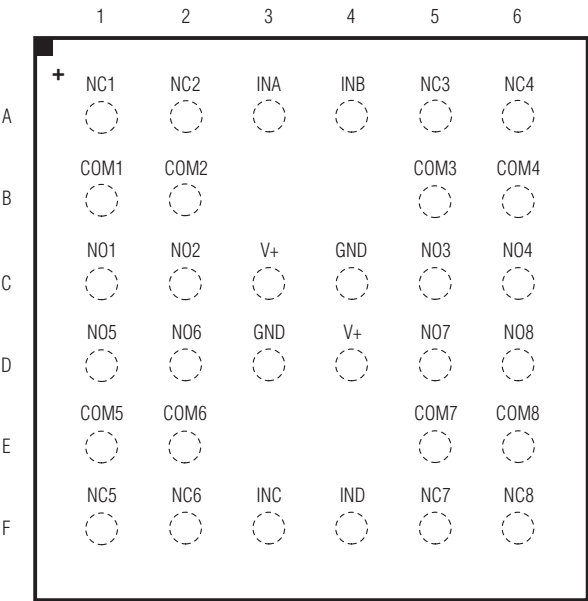

UCSP

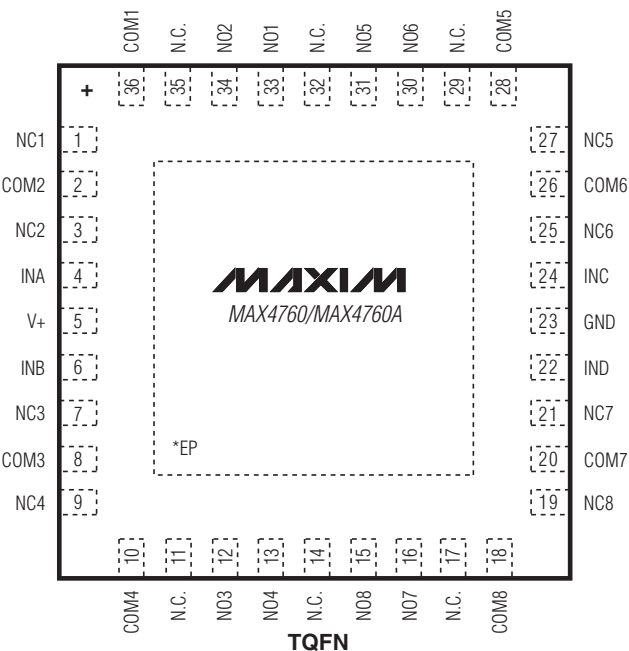

TQFN

*EXPOSED PADDLE CONNECTED TO GND.


MAX4760/MAX4760A

INA	NO1/NO2	NC1/NC2
LOW	OFF	ON
HIGH	ON	OFF
INB	NO3/NO4	NC3/NC4
LOW	OFF	ON
HIGH	ON	OFF
INC	NO5/NO6	NC5/NC6
LOW	OFF	ON
HIGH	ON	OFF
IND	NO7/NO8	NC7/NC8
LOW	OFF	ON
HIGH	ON	OFF

High-Bandwidth, Quad DPDT Switches

Pin Configurations/Truth Tables (continued)

MAX4760/MAX4760A/MAX4761/MAX4761A

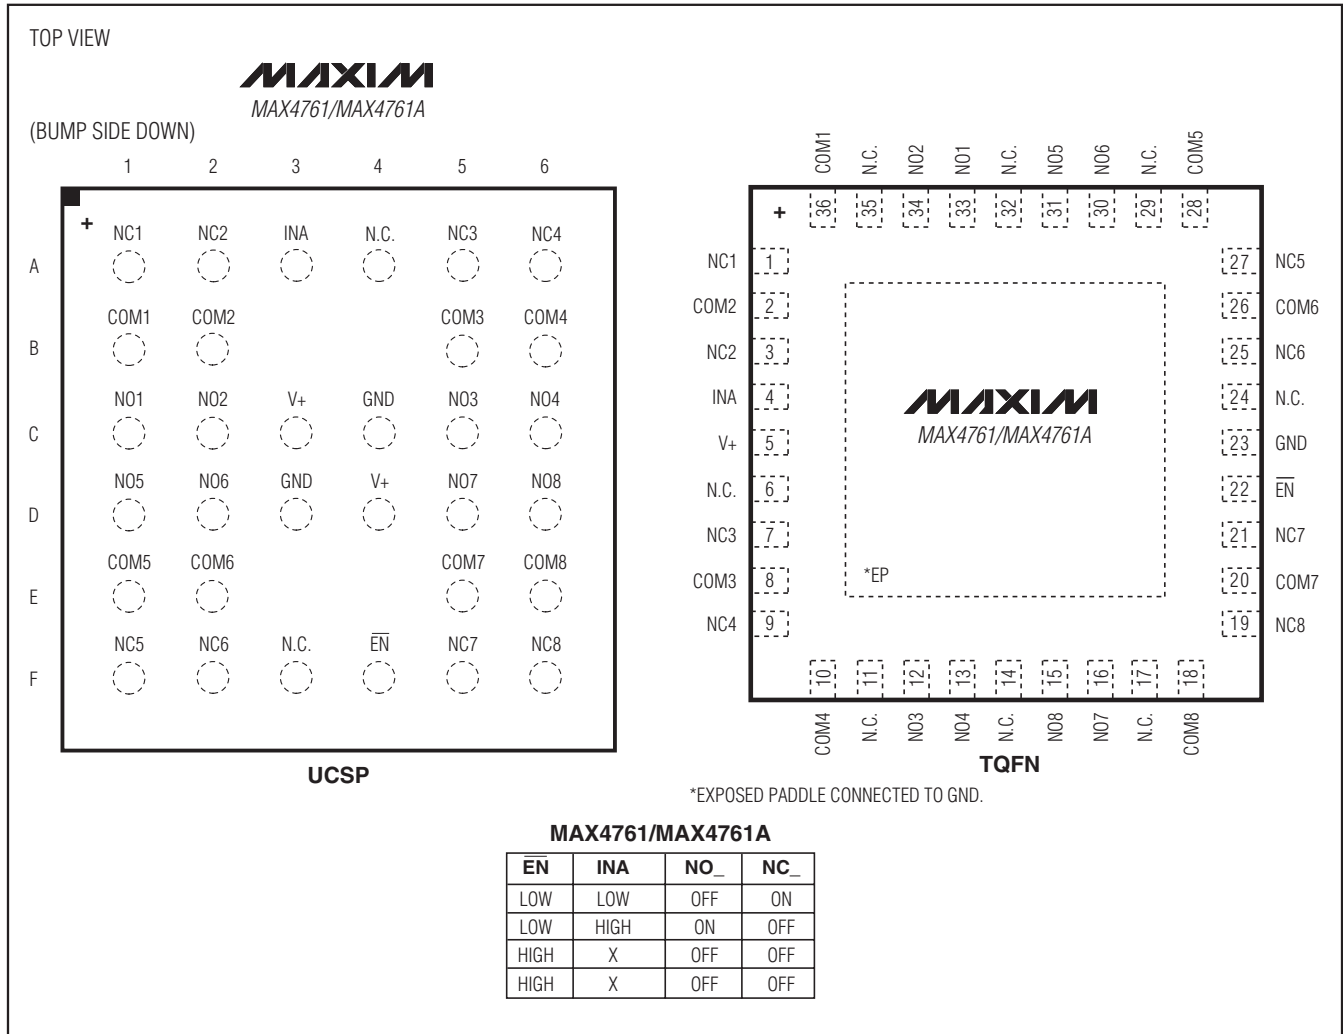

Chip Information

PROCESS: CMOS

Package Information

For the latest package outline information and land patterns, go to www.maxim-ic.com/packages.

PACKAGE TYPE	PACKAGE CODE	DOCUMENT NO.
36 UCSP	B36-2	21-0082
36 TQFN-EP	T3666-3	21-0141

High-Bandwidth, Quad DPDT Switches

Revision History

REVISION NUMBER	REVISION DATE	DESCRIPTION	PAGES CHANGED
4	4/07	Addition of MAX4760A/MAX4761A	1–14
5	4/09	Revised <i>Ordering Information</i> , <i>Electrical Characteristics</i> table, and <i>Pin Description</i> .	1, 3, 7

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

14 **Maxim Integrated Products, 120 San Gabriel Drive, Sunnyvale, CA 94086 408-737-7600**

© 2009 Maxim Integrated Products

Maxim is a registered trademark of Maxim Integrated Products, Inc.