

ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ unless otherwise noted)										
PARAMETER	SYMBOL	MBRF 3035 CT	MBRF 3045 CT	MBRF 3050 CT	MBRF 3060 CT	MBRF 3090 CT	MBRF 30100 CT	MBRF 30150 CT	MBRF 30200 CT	UNIT
Peak repetitive forward current (Rated V_R , Square wave, 20KHz)	I_{FRM}	30								A
Critical rate of rise of off-state voltage	dv/dt	10,000								V/ μs
Junction temperature	T_J	-55 to +150								$^\circ\text{C}$
Storage temperature	T_{STG}	-55 to +150								$^\circ\text{C}$

Notes:

- 1.
- $t_p = 2.0\mu\text{s}$
- , 1.0KHz

THERMAL PERFORMANCE			
PARAMETER	SYMBOL	TYP	UNIT
Junction-to-case thermal resistance	$R_{\theta JC}$	4	$^\circ\text{C/W}$

ELECTRICAL SPECIFICATIONS (T _A = 25°C unless otherwise noted)						
PARAMETER		CONDITIONS	SYMBOL	TYP	MAX	UNIT
Forward voltage per diode ⁽¹⁾	MBRF3035CT	I _F = 15A, T _J = 25°C	V _F	-	0.70	V
	MBRF3045CT					
	MBRF3050CT			-	0.75	V
	MBRF3060CT					
	MBRF3090CT			-	0.84	V
	MBRF30100CT					
	MBRF30150CT	I _F = 30A, T _J = 25°C		-	0.95	V
	MBRF30200CT					
	MBRF3035CT			-	0.82	V
	MBRF3045CT					
	MBRF3050CT			-	0.90	V
	MBRF3060CT					
MBRF3090CT	-	0.94	V			
MBRF30100CT						
MBRF30150CT	-	1.05	V			
MBRF30200CT						

ELECTRICAL SPECIFICATIONS (T _A = 25°C unless otherwise noted)						
PARAMETER		CONDITIONS	SYMBOL	TYP	MAX	UNIT
Forward voltage per diode ⁽¹⁾	MBRF3035CT MBRF3045CT	I _F = 15A, T _J = 125°C	V _F	-	0.60	V
	MBRF3050CT MBRF3060CT			-	0.65	V
	MBRF3090CT MBRF30100CT			-	0.70	V
	MBRF30150CT MBRF30200CT			-	0.80	V
	MBRF3035CT MBRF3045CT	I _F = 30A, T _J = 125°C		-	0.73	V
	MBRF3050CT MBRF3060CT			-	0.78	V
	MBRF3090CT MBRF30100CT			-	0.82	V
	MBRF30150CT MBRF30200CT			-	0.92	V
	Reverse current @ rated V _R per diode ⁽²⁾	MBRF3035CT MBRF3045CT MBRF3050CT MBRF3060CT MBRF3090CT MBRF30100CT MBRF30150CT MBRF30200CT		T _J = 25°C	I _R	-
MBRF3035CT MBRF3045CT		T _J = 125°C	-	20		mA
MBRF3050CT MBRF3060CT			-	15		mA
MBRF3090CT MBRF30100CT MBRF30150CT MBRF30200CT			-	10		mA

Notes:

1. Pulse test with $PW = 0.3\text{ms}$
2. Pulse test with $PW = 30\text{ms}$

ORDERING INFORMATION		
ORDERING CODE ⁽¹⁾⁽²⁾	PACKAGE	PACKING
MBRF30xCT	ITO-220AB	50 / Tube
MBRF30xCTH	ITO-220AB	50 / Tube

Notes:

1. "x" defines voltage from 35V(MBRF3035CT) to 200V(MBRF30200CT)
2. "H" means AEC-Q101 qualified

CHARACTERISTICS CURVES

($T_A = 25^\circ\text{C}$ unless otherwise noted)

Fig.1 Forward Current Derating Curve

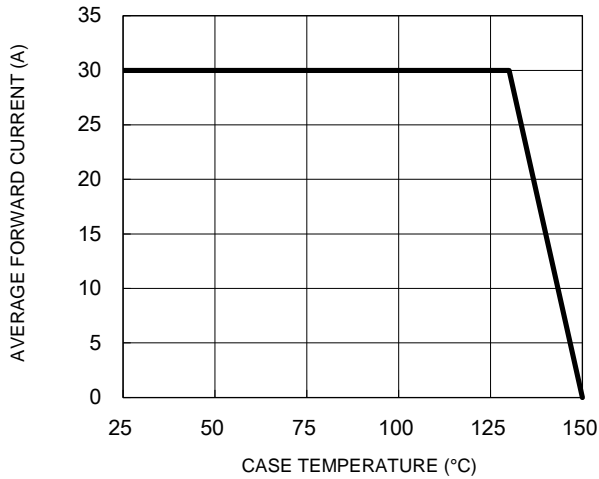


Fig.2 Typical Junction Capacitance

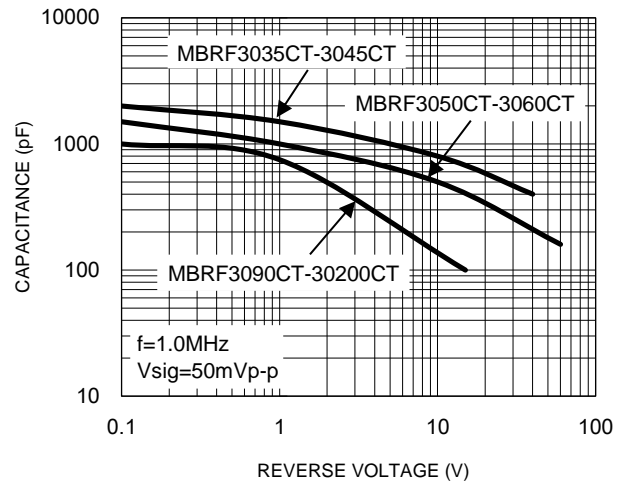


Fig.3 Typical Reverse Characteristics

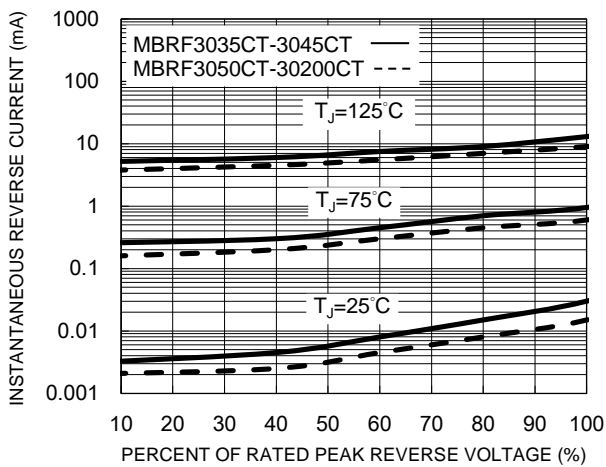


Fig.4 Typical Forward Characteristics


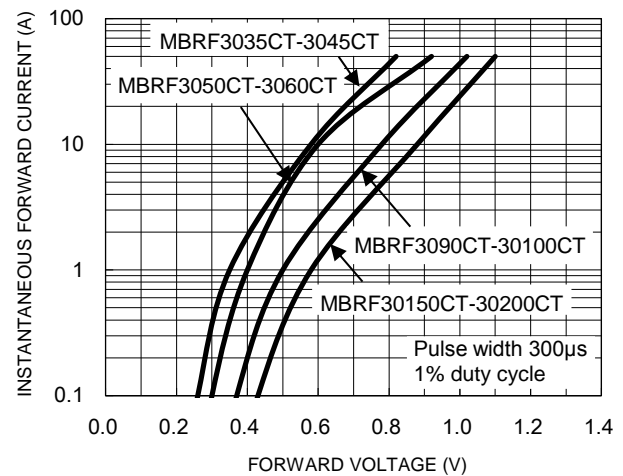



Fig.5 Maximum Non-Repetitive Forward Surge Current

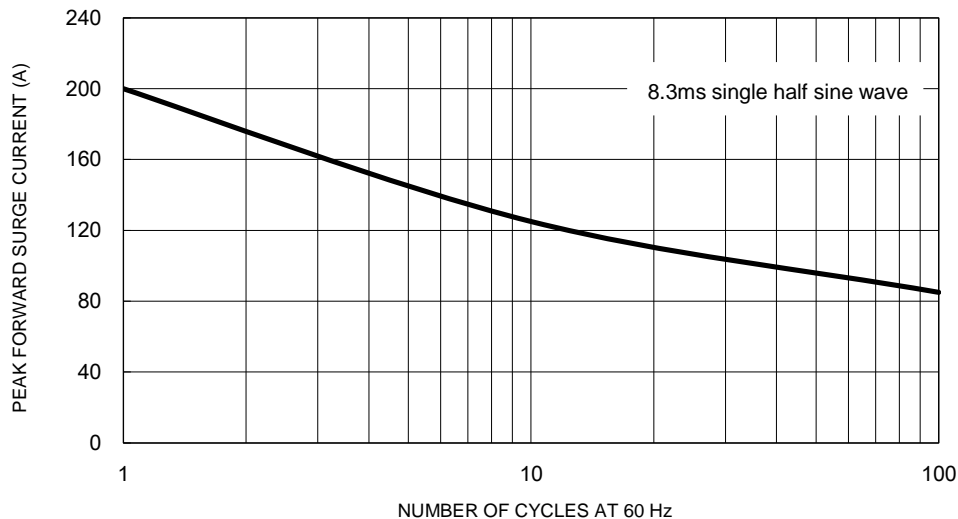


CHARACTERISTICS CURVES

($T_A = 25^\circ\text{C}$ unless otherwise noted)

Fig.6 Typical Transient Thermal Impedance

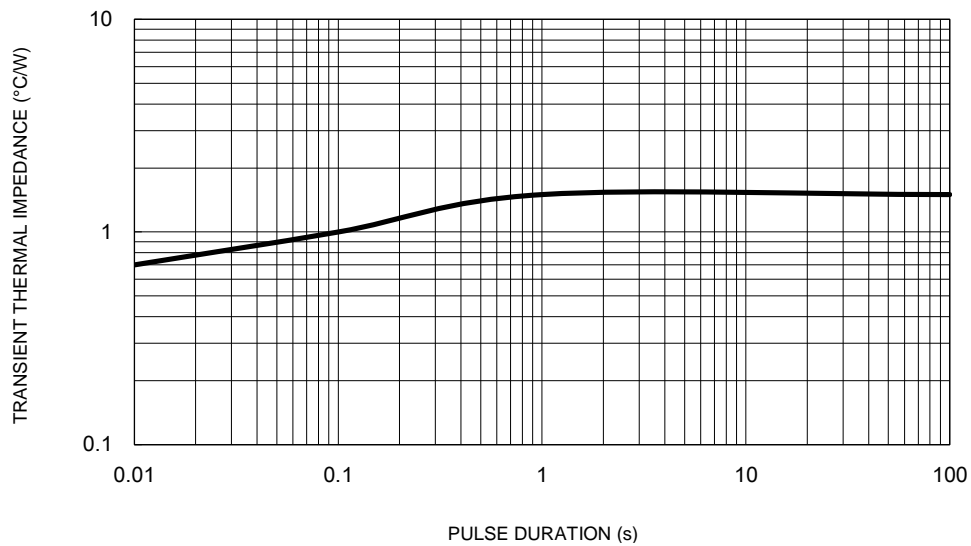

PACKAGE OUTLINE DIMENSIONS

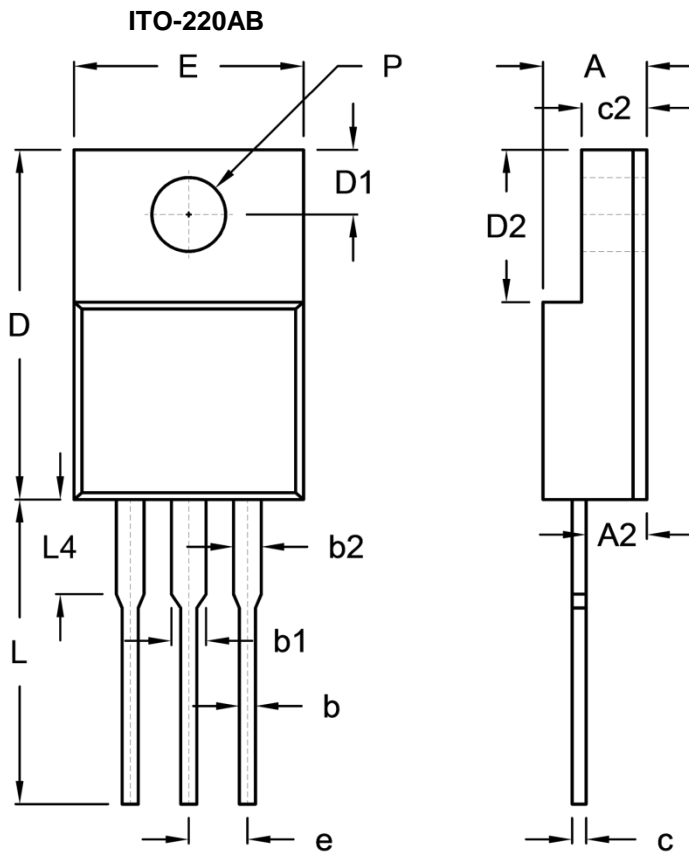

DIM.	Unit (mm)		Unit (inch)	
	Min.	Max.	Min.	Max.
A	4.30	4.70	0.169	0.185
A2	2.30	2.96	0.091	0.117
b	0.50	0.90	0.020	0.035
b1	-	1.80	-	0.071
b2	0.95	1.45	0.037	0.057
c	0.46	0.76	0.018	0.030
c2	2.50	3.16	0.098	0.124
D	14.80	15.50	0.583	0.610
D1	2.40	3.20	0.094	0.126
D2	6.30	6.90	0.248	0.272
E	9.60	10.30	0.378	0.406
e	2.41	2.67	0.095	0.105
L	12.60	13.80	0.496	0.543
L4	-	4.10	-	0.161
P	3.00	3.40	0.118	0.134

MARKING DIAGRAM



P/N = Marking Code
 G = Green Compound
 YWW = Date Code
 F = Factory Code

Notice

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf assumes no responsibility or liability for any errors or inaccuracies.

Purchasers are solely responsible for the choice, selection, and use of TSC products and TSC assumes no liability for application assistance or the design of Purchasers' products.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.