


## Ordering Information

| Part Number   | Enable      | Temperature Range | Latch | Pb-Free | Package      |
|---------------|-------------|-------------------|-------|---------|--------------|
| MIC2545A-1BM  | Active HIGH | −40°C to +85°C    | No    | No      | 8-Pin SOP    |
| MIC2545A-1BN  | Active HIGH | −40°C to +85°C    | No    | No      | 8-Pin DIP    |
| MIC2545A-1BTS | Active HIGH | −40°C to +85°C    | No    | No      | 14-Pin TSSOP |
| MIC2545A-2BM  | Active LOW  | −40°C to +85°C    | No    | No      | 8-Pin SOP    |
| MIC2545A-2BN  | Active LOW  | −40°C to +85°C    | No    | No      | 8-Pin DIP    |
| MIC2545A-2BTS | Active LOW  | −40°C to +85°C    | No    | No      | 14-Pin TSSOP |
| MIC2545A-1YM  | Active HIGH | −40°C to +85°C    | No    | Yes     | 8-Pin SOP    |
| MIC2545A-1YN  | Active HIGH | −40°C to +85°C    | No    | Yes     | 8-Pin DIP    |
| MIC2545A-1YTS | Active HIGH | −40°C to +85°C    | No    | Yes     | 14-Pin TSSOP |
| MIC2545A-2YM  | Active LOW  | −40°C to +85°C    | No    | Yes     | 8-Pin SOP    |
| MIC2545A-2YN  | Active LOW  | −40°C to +85°C    | No    | Yes     | 8-Pin DIP    |
| MIC2545A-2YTS | Active LOW  | −40°C to +85°C    | No    | Yes     | 14-Pin TSSOP |
| MIC2549A-1BM  | Active HIGH | −40°C to +85°C    | Yes   | No      | 8-Pin SOP    |
| MIC2549A-1BN  | Active HIGH | −40°C to +85°C    | Yes   | No      | 8-Pin DIP    |
| MIC2549A-1BTS | Active HIGH | −40°C to +85°C    | Yes   | No      | 14-Pin TSSOP |
| MIC2549A-2BM  | Active LOW  | −40°C to +85°C    | Yes   | No      | 8-Pin SOP    |
| MIC2549A-2BN  | Active LOW  | −40°C to +85°C    | Yes   | No      | 8-Pin DIP    |
| MIC2549A-2BTS | Active LOW  | −40°C to +85°C    | Yes   | No      | 14-Pin TSSOP |
| MIC2549A-1YM  | Active HIGH | −40°C to +85°C    | Yes   | Yes     | 8-Pin SOP    |
| MIC2549A-1YN  | Active HIGH | −40°C to +85°C    | Yes   | Yes     | 8-Pin DIP    |
| MIC2549A-1YTS | Active HIGH | −40°C to +85°C    | Yes   | Yes     | 14-Pin TSSOP |
| MIC2549A-2YM  | Active LOW  | −40°C to +85°C    | Yes   | Yes     | 8-Pin SOP    |
| MIC2549A-2YN  | Active LOW  | −40°C to +85°C    | Yes   | Yes     | 8-Pin DIP    |
| MIC2549A-2YTS | Active LOW  | −40°C to +85°C    | Yes   | Yes     | 14-Pin TSSOP |

Pin Configuration

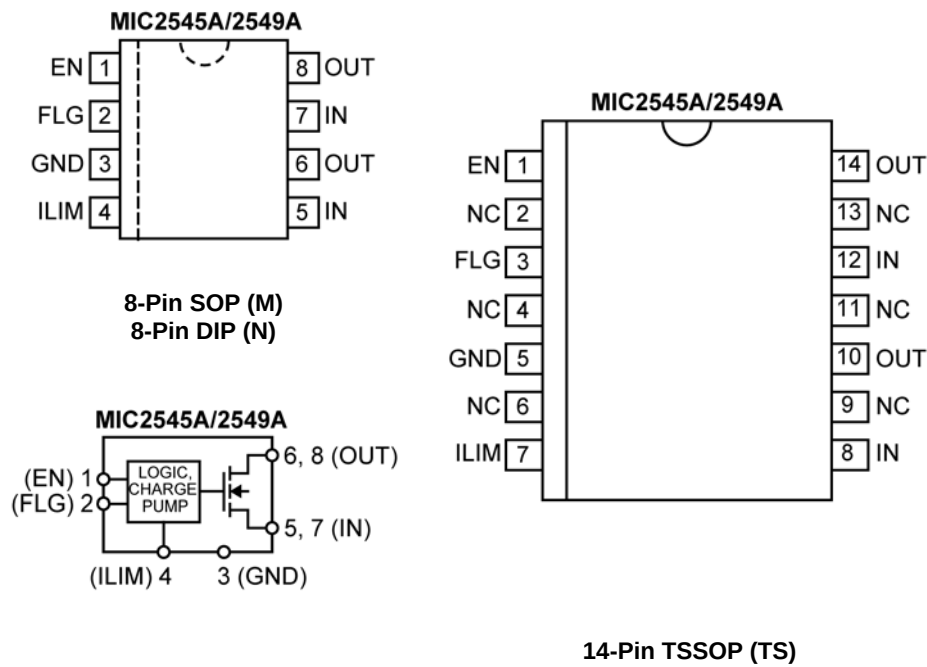

Pin Description

| Pin Number<br>SOP, DIP | Pin Number<br>TSSOP   | Pin Name | Pin Function                                                                                                                                                                                                             |
|------------------------|-----------------------|----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1                      | 1                     | EN       | Enable (Input): Logic-compatible enable input (–1 version is active high, –2 version is active low). High input >1.8V typical; low input <1.4V typical. Do not float. MIC2549A only: Also resets thermal-shutdown latch. |
| 2                      | 3                     | FLG      | Fault Flag (Output): Active-low, open-drain output. Indicates overcurrent or thermal shutdown. MIC2549A only: Latched low on thermal shutdown.                                                                           |
| 3                      | 5                     | GND      | Ground: supply return.                                                                                                                                                                                                   |
| 4                      | 7                     | ILIM     | Current Limit: Sets current-limit threshold using an external resistor ( $R_{SET}$ ) connected to ground. $76.8\Omega < R_{SET} < 459\Omega$ .                                                                           |
| 5, 7                   | 8, 12                 | IN       | Supply Input: Output MOSFET drain. Also powers internal circuitry. Both IN pins must be externally connected together.                                                                                                   |
| 6, 8                   | 10, 14                | OUT      | Switch Output: Output MOSFET source. Both OUT pins must be externally connected together.                                                                                                                                |
|                        | 2, 4, 6, 9,<br>11, 13 | NC       | Not internally connected.                                                                                                                                                                                                |

**Absolute Maximum Ratings<sup>(1)</sup>**

|                                     |                    |
|-------------------------------------|--------------------|
| Supply Voltage ( $V_{IN}$ )         | +7.0V              |
| Output Voltage ( $V_{OUT}$ )        | +7.0V              |
| Output Current ( $I_{OUT}$ )        | Internally Limited |
| Enable Input ( $V_{EN}$ )           | –0.3V to +7V       |
| Fault Flag Voltage ( $V_{FLG}$ )    | +7.0V              |
| Fault Flag Current ( $I_{FLG}$ )    | 50mA               |
| Storage Temperature ( $T_s$ )       | –65°C to +150°C    |
| Junction Temperature ( $T_J$ )      | Internally Limited |
| Lead Temperature (soldering, 5sec.) | 260°C              |
| ESD Rating <sup>(3)</sup>           | 1500V              |

**Operating Ratings<sup>(2)</sup>**

|                                        |                |
|----------------------------------------|----------------|
| Supply Voltage ( $V_{IN}$ )            | +2.7V to +5.5V |
| Ambient Temperature ( $T_A$ )          | –40°C to +85°C |
| Package Thermal Resistance             |                |
| PDIP ( $\theta_{JA}$ )                 | 130°C/W        |
| SOIC ( $\theta_{JA}$ )                 | 160°C/W        |
| TSSOP ( $\theta_{JA}$ ) <sup>(4)</sup> | 100°C/W        |
| Current-Limit Set Range <sup>(5)</sup> | 0.5A to 3A     |

**Electrical Characteristics<sup>(4)</sup>**

$V_{IN} = +5V$ ;  $T_A = 25^\circ\text{C}$ , **bold** values indicate –40°C to +85°C, unless noted.

| Symbol       | Parameter                | Condition                                                                     | Min. | Typ. | Max. | Units         |
|--------------|--------------------------|-------------------------------------------------------------------------------|------|------|------|---------------|
|              | Supply Current           | Switch Off, $V_{OUT} = \text{Open}$ <sup>(6)</sup>                            |      | 0.75 | 5    | $\mu\text{A}$ |
|              |                          | Switch On, $V_{OUT} = \text{Open}$ <sup>(6)</sup>                             |      | 90   | 125  | $\mu\text{A}$ |
|              |                          |                                                                               |      |      | 150  |               |
| $V_{EN}$     | Enable Input Voltage     | Enable High Transition <sup>(6)</sup>                                         | 2.4  | 1.6  |      | V             |
|              |                          | Enable Low Transition <sup>(6)</sup>                                          |      | 1.5  | 0.8  |               |
|              | Enable Input Current     | $V_{EN} = V_{OH(MIN)} = 2.4V$                                                 |      | 0.01 | 1    | $\mu\text{A}$ |
|              |                          | $V_{EN} = V_{OL(MAX)} = 0.8V$                                                 |      | 0.01 | 1    |               |
|              | Enable Input Capacitance | <b>Note 7</b>                                                                 |      | 1    |      | pF            |
| $R_{DS(ON)}$ | Switch Resistance        | $I_{OUT} = 500\text{mA}$                                                      |      | 35   | 50   | m $\Omega$    |
|              | Current-Limit Factor     | $I_{LIMIT} = 0.5A \text{ to } 3A, V_{OUT} = 1V \text{ to } 4V$ <sup>(5)</sup> | 184  | 230  | 276  | V             |
|              |                          | $I_{LIMIT} = 1A \text{ to } 2.5A, V_{OUT} = 1V \text{ to } 4V$ <sup>(5)</sup> | 195  | 230  | 264  |               |
|              | Output Leakage Current   | Switch Off, $V_{OUT} = 0V$                                                    |      | 1    | 10   | $\mu\text{A}$ |
| $t_{ON}$     | Output Turn-On Delay     | $R_L = 10\Omega, C_L = 1\mu\text{F}$ , <b>Figures 1a, 1b</b>                  | 1    | 2    | 5    | ms            |
| $t_R$        | Output Turn-On Rise Time | $R_L = 10\Omega, C_L = 1\mu\text{F}$ , <b>Figures 1a, 1b</b>                  | 0.75 | 1.8  | 4.9  | ms            |
| $t_{OFF}$    | Output Turn-Off Delay    | $R_L = 10\Omega, C_L = 1\mu\text{F}$ , <b>Figures 1a, 1b</b>                  |      | 25   |      | $\mu\text{s}$ |

**Notes:**


- Exceeding the absolute maximum rating may damage the device.
- The device is not guaranteed to function outside its operating rating.
- Devices are ESD sensitive. Handling precautions recommended. Human body model, 1.5k in series with 100pF.
- Assumes 4-layer PCB is used.
- Current limit is determined by  $I_{LIMIT} = \frac{230}{R_{SET}}$ , where  $R_{SET}$  is in  $\Omega$ s, and 230 is typical current-limit factor in volts.
- Off is  $\leq 0.8V$  and on is  $\geq 2.4V$  for the MIC2545A-1 and MIC2549A-1. Off is  $\geq 2.4V$  and on is  $\leq 9.8V$  for the MIC2545A-2 and MIC2549A-2. The enable input has about 100mV of hysteresis.
- Guaranteed by design but not production tested.

Electrical Characteristics<sup>(4)</sup> (Continued)

V<sub>IN</sub> = +5V; T<sub>A</sub> = 25°C, **bold** values indicate –40°C to +85°C, unless noted.

| Symbol          | Parameter                          | Condition                                                                            | Min. | Typ. | Max. | Units |
|-----------------|------------------------------------|--------------------------------------------------------------------------------------|------|------|------|-------|
| t <sub>F</sub>  | Output Turn-Off Fall Time          | R <sub>L</sub> = 10Ω, C <sub>L</sub> = 1μF, <b>Figures 1a, 1b</b>                    |      | 23   |      | μs    |
|                 | Overtemperature Threshold Shutdown | T <sub>J</sub> Increasing                                                            |      | 135  |      | °C    |
|                 |                                    | T <sub>J</sub> Decreasing                                                            |      | 120  |      |       |
|                 | Error Flag Off Current             | V <sub>FLG</sub> = 5V                                                                |      | 0.01 | 1    | μA    |
|                 | EN Pulse Reset Width               | MIC2549A Thermal-Shutdown Latch <sup>(7)</sup>                                       | 1    |      |      | μs    |
| t <sub>SU</sub> | V <sub>IN</sub> to EN Set-Up       | MIC2549 <sup>(7)</sup> , <b>Figure 1c</b>                                            | 0    |      |      | μs    |
|                 | Current-Limit Response Time        | V <sub>OUT</sub> = 0V to I <sub>OUT</sub> = 2A, I <sub>SET</sub> = 1A <sup>(7)</sup> |      | 40   |      | μs    |
| V <sub>OL</sub> | Error Flag Output Resistance       | I <sub>FLG</sub> = 10mA                                                              |      | 4    | 15   | Ω     |

Test Circuit

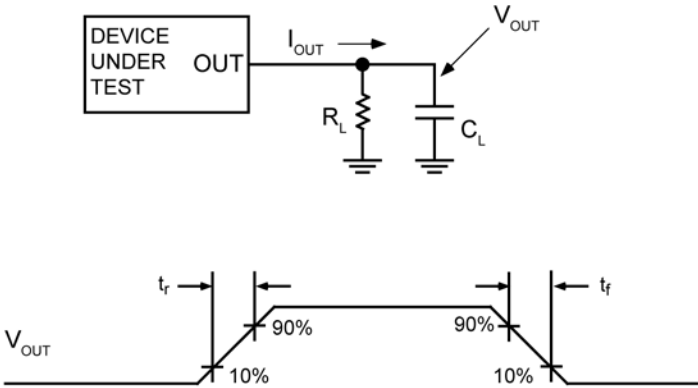

Functional Characteristics Test Circuit

## Timing Diagrams

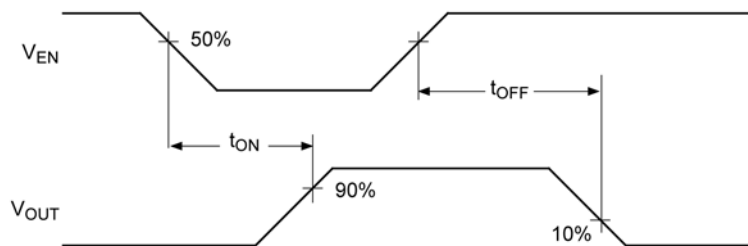


Figure 1a. MIC2545A/49A-2

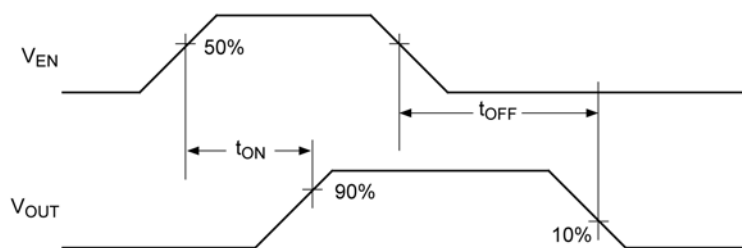


Figure 1b. MIC2545A/49A-1

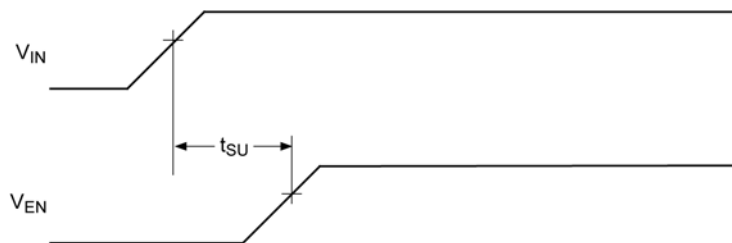


Figure 1c. Input-to-Enable Setup Timing

## Timing Diagrams (Continued)

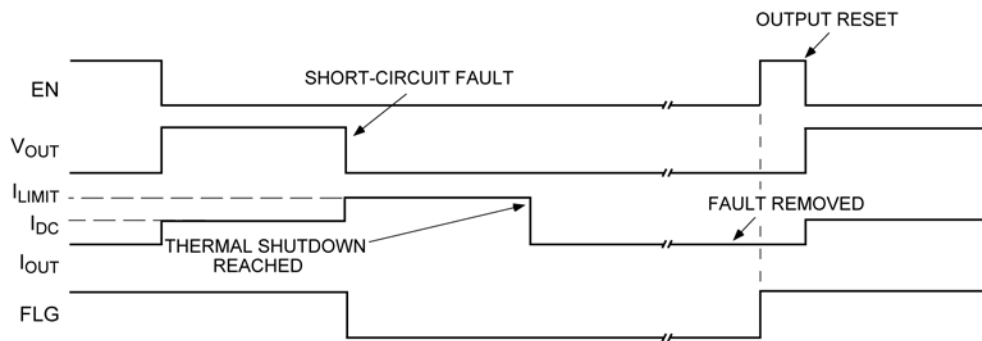


Figure 2a. MIC2545A-2 Timing: Output is Reset by Toggling EN















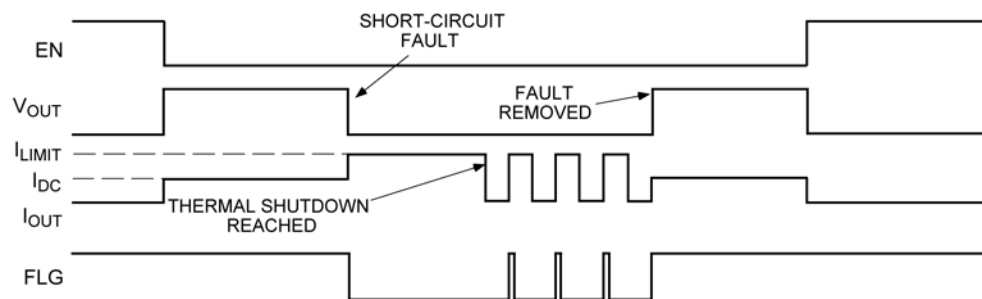


Figure 2b. MIC2545A-2 Timing







## Typical Characteristics

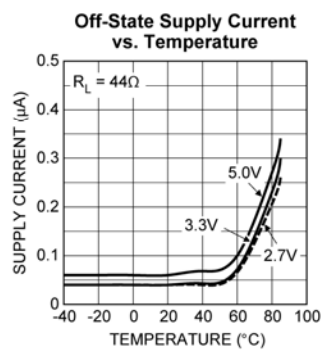


Typical Characteristics (Continued)




## Functional Characteristics

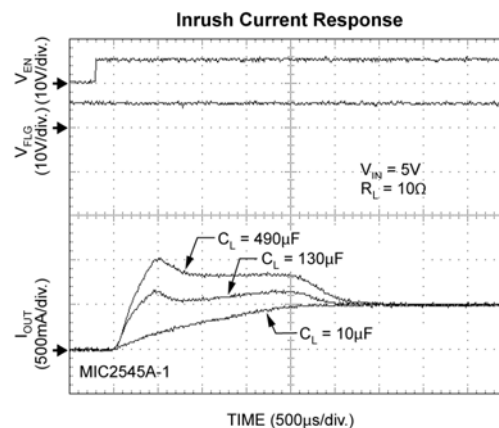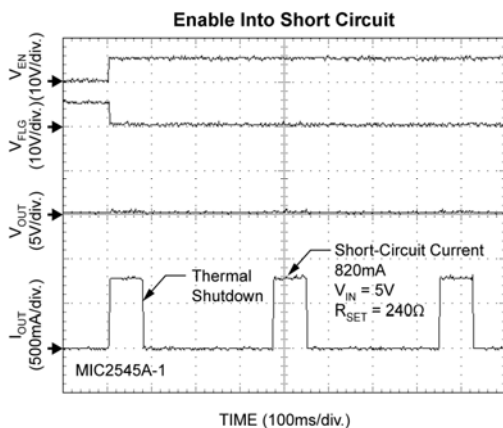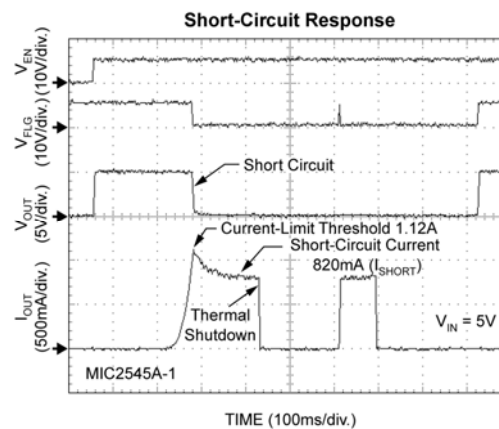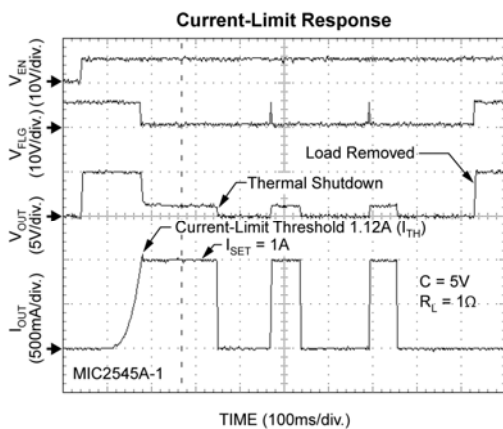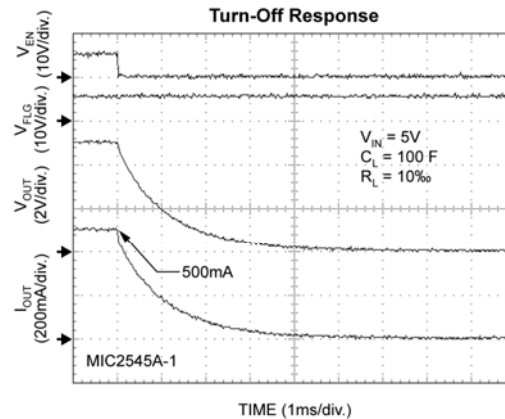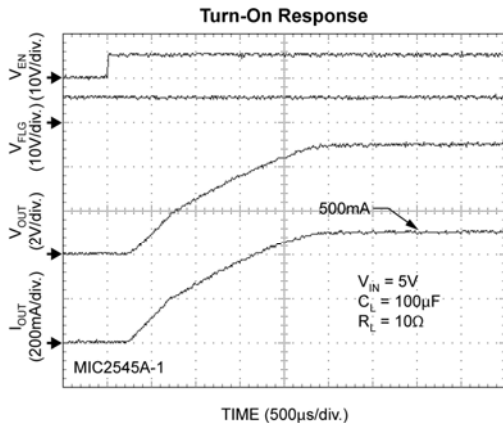

## Functional Characteristics (Continued)

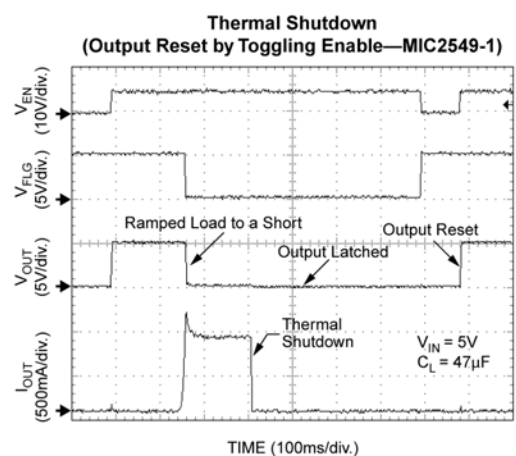

## Block Diagram

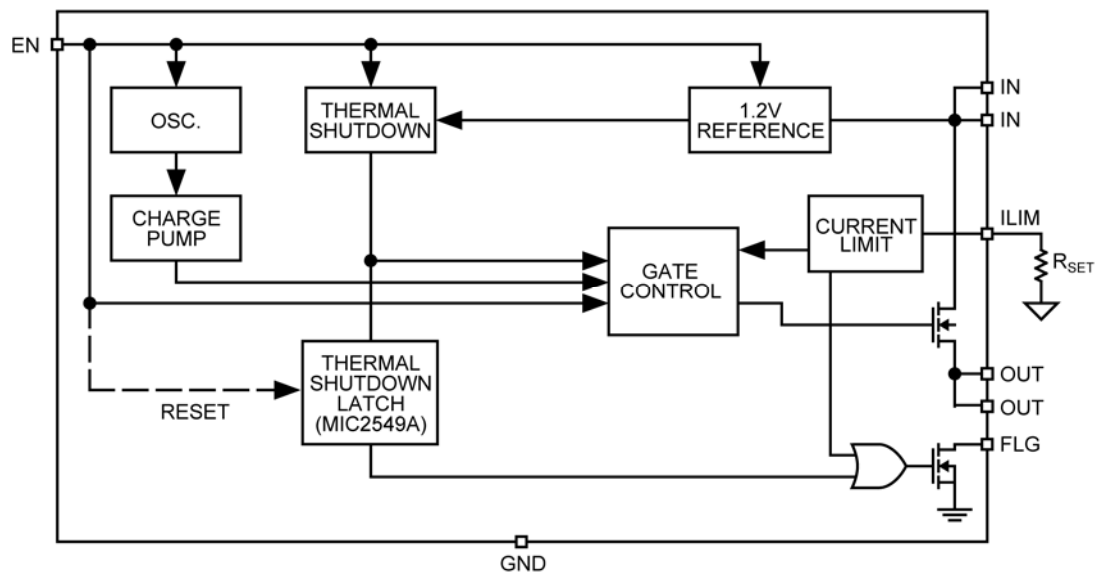

## Functional Description

The MIC2545A and MIC2549A are high-side N-channel switches available with active-high or active-low enable inputs. Fault conditions turn off or inhibit turn-on of the output transistor and activate the open-drain error flag transistor making it sink current to ground.

### Input and Output

IN is the power supply connection to the logic circuitry and the drain of the output MOSFET. OUT is the source of the output MOSFET. In a typical circuit, current flows from IN to OUT toward the load. If  $V_{OUT}$  is greater than  $V_{IN}$ , current will flow from OUT to IN since the switch is bidirectional when enabled. The output MOSFET and driver circuitry are also designed to allow the MOSFET source to be externally forced to a higher voltage than the drain ( $V_{OUT} > V_{IN}$ ) when the switch is disabled. In this situation, the MIC2545A/49A avoids undesirable current flow from OUT to IN. Both IN pins must be connected together, and both OUT pins must be connected together.

### Thermal Shutdown

Thermal shutdown shuts off the output MOSFET and signals the fault flag if the die temperature exceeds 135°C. 10°C of hysteresis prevents the switch from turning on until the die temperature drops to 125°C. Overtemperature detection functions only when the switch is enabled.

The MIC2549A features an internal latch which causes the part to remain off after thermal shutdown until a reset pulse is provided via the enable pin (pin1). While in current-limit, the thermal shutdown latch prevents on/off cycling of the output. Refer to Figure 2 for timing diagram. The flag remains low until reset.

### Enable Input

EN must be driven logic high or logic low, or be pulled high or low for a clearly defined input. Floating the input may cause unpredictable operation. EN should not be allowed to go negative with respect to GND.

### Current-Limit Operation

The current limit is user adjustable with an external set resistor. Current limiting in the range of 500mA to 3A is available with a set point accuracy of better than ±30% (±20% for  $I_{SET}$  1 to 2.5A). The current-limit circuit prevents damage to the output MOSFET and external load.

The current-limit response of the MIC2545A/49A is based on the type of load that is applied to the output and is defined in three parts:

1. The first mode of operation is where the device enters a constant-current mode preventing further increases in output current. The value of this current,  $I_{LIMIT}$ , is defined by the value of  $R_{SET}$  as explained further in this section.
2. When a short circuit is applied to the output of an enabled device the output current immediately folds back to a value less than  $I_{LIMIT}$  called  $I_{SHORT}$ . This further protects the load and reduces device power dissipation. Refer to the "Typical Characteristics: Output Current vs. Output Voltage" graph for details.
3. When a load is increased, the output current will proportionally increase up to the current-limit threshold,  $I_{TH}$ , as shown in the "Functional Characteristics: Current-Limit Response" graph. The device in this case will supply current slightly higher than the current-limit set point defined by  $R_{SET}$ . As the load is increased further the current folds back to  $I_{LIMIT}$ .

The nominal current-limit value,  $I_{LIMIT}$ , is set with an external resistor between  $I_{LIM}$  (Pin 4) and GND (Pin 3). For a desired current-limit, the value of the external set resistor is given by:

$$R_{SET} = \left( \frac{230}{I_{LIMIT}} \right)$$

where:

$$76.8\Omega < R_{SET} < 459\Omega$$

Refer to the "Typical Characteristics: Current-Limit vs  $R_{SET}$ " graph for more details.

Current through  $R_{SET}$  increases with output current. The voltage across  $R_{SET}$  could be monitored with a high-impedance comparator to provide an indication of output current.  $R_{SET}$  should be between 76.8Ω and 459Ω (1% resistor value).

### Fault Flag

FLG is an N-channel, open-drain MOSFET output. The fault-flag is active (low) for current-limit or thermal shutdown conditions. The flag output MOSFET is capable of sinking a 10mA load to typically 100mV above ground. For applications with  $V_{IN} = 3.6V$ , it is recommended that flag current be limited to 5mA or less.

## Application Information

### Supply Filtering

A 0.1µF to 1µF bypass capacitor from IN to GND, located near the MIC2545A and MIC2549A, is strongly recommended to control supply transients. Without a bypass capacitor, an output short may cause sufficient ringing on the input (from supply lead inductance) to damage internal control circuitry.

Input transients must not exceed the absolute maximum supply voltage ( $V_{IN}$  (max) = 6V) even for a short duration.

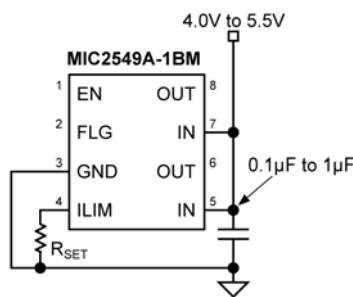


Figure 3. Supply Bypassing

### Power Dissipation

The device's junction temperature depends on several factors such as the load, PCB layout, ambient temperature, and package type. Equations that can be used to calculate power dissipation and junction temperature are found below.

Calculation of power dissipation can be accomplished by the following equation:

$$P_D = R_{DS(ON)} \times (I_{OUT})^2$$

To relate this to junction temperature, the following equation can be used:

$$T_J = P_D \times \theta_{JA} + T_A$$

where:

$T_J$  = Junction temperature

$T_A$  = Ambient temperature

$\theta_{JA}$  = The thermal resistance of the package

### Transient Overcurrent Filter


The inrush current from the connection of a heavy capacitive load may cause the fault flag to fall for 10µs to 200µs while the switch is in a constant-current mode, charging the capacitance. Adding an optional series resistor-capacitor ( $R_{SET2}$ ) in parallel with  $R_{SET}$ , as shown in Figure 4, allows the transient current-limit to be set to a different value than steady state. A typical USB hot-plug inrush is 2A to 3A for 10µs to 20µs. If  $R_{SET}$  is 435Ω (530mA), an  $R_{SET2}$  of 88Ω (2.5A) and  $C_{SET}$  of 1µF ( $RC \approx 90\mu s$ ) allows transient surge of 3A to pass for 90µs without tripping the overcurrent flag (FLG).

### USB Power Dissipations


The MIC2545A is ideal for meeting USB power distribution requirements. Figure 7 depicts a USB Host application.  $R_{SET}$  should be set to a value providing a current-limit >500mA. The accurate current-limit of the MIC2545A will reduce power supply current requirements. Also, fast reaction to short-circuit faults prevent voltage droop in mobile PC applications.

### Printed Circuit Board Hot-Plug

The MIC2545A/49A is an ideal inrush current-limiter suitable for hot-plug applications. Due to the integrated charge pump, the MIC2545A/49A presents a high impedance when off and slowly becomes a low impedance as it turns on. This "soft start" feature effectively isolates power supplies from highly-capacitive loads by reducing inrush current during hot-plug events. Figure 5 shows how the MIC2545A may be used in a hot-plug application.

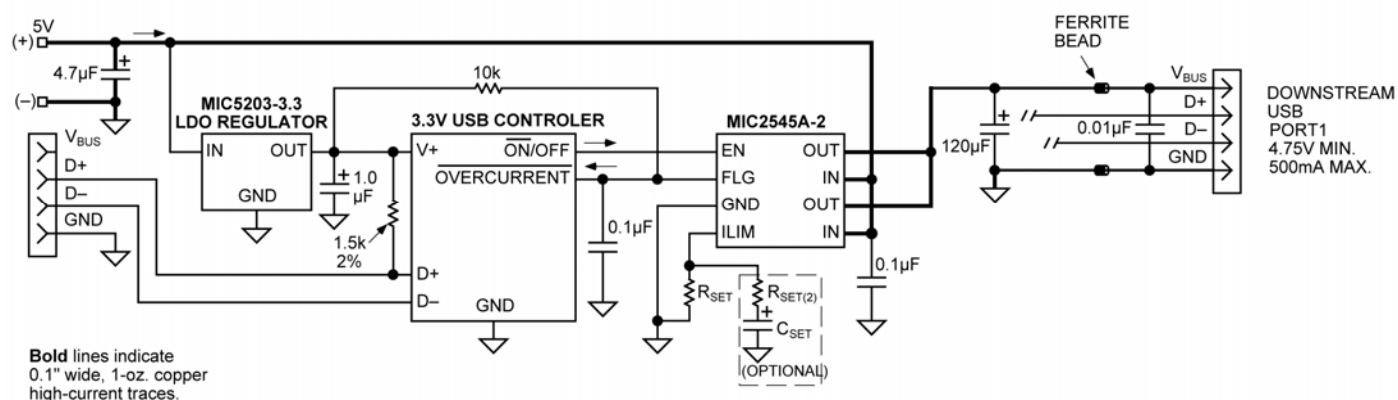


### Figure 4. USB Host Application

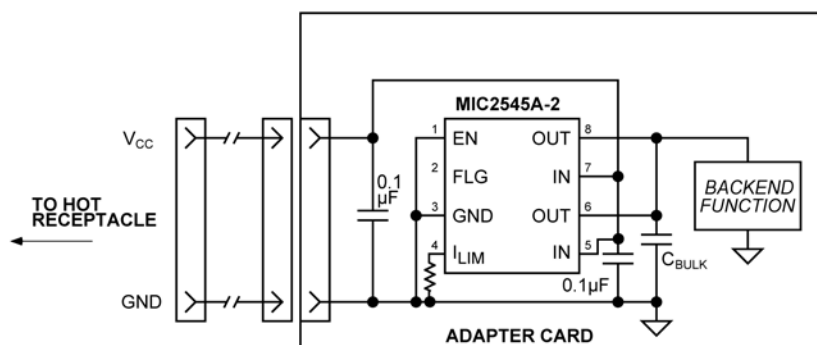


### Figure 5. Hot-Plug Application


## Package Information

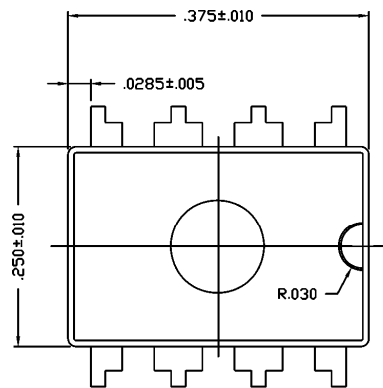


TOP VIEW

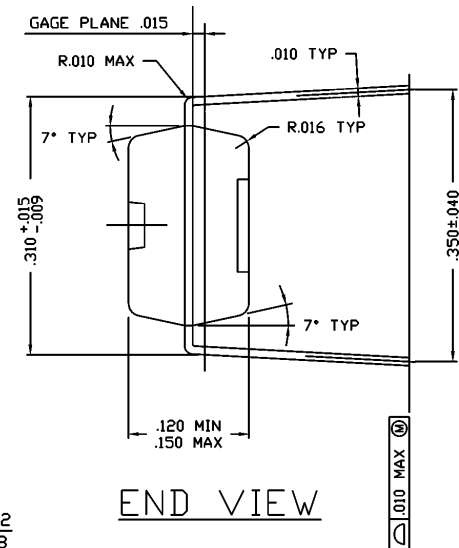

END VIEW

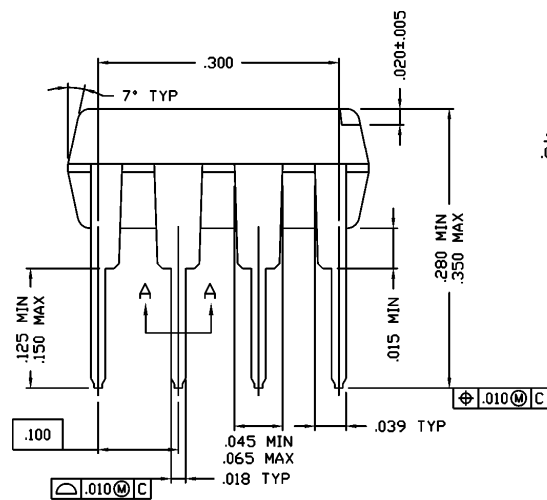


SIDE VIEW

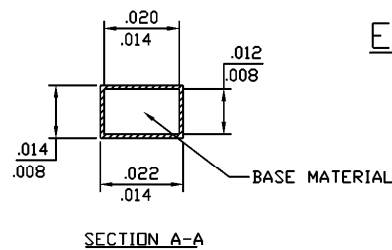


SECTION A-A

8-Pin DIP (N)


## Package Information (Continued)

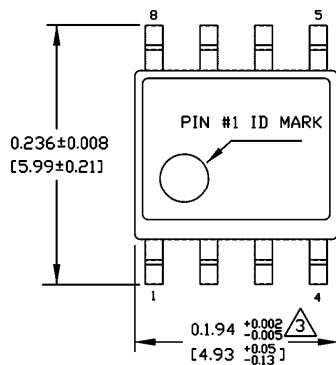


TOP VIEW

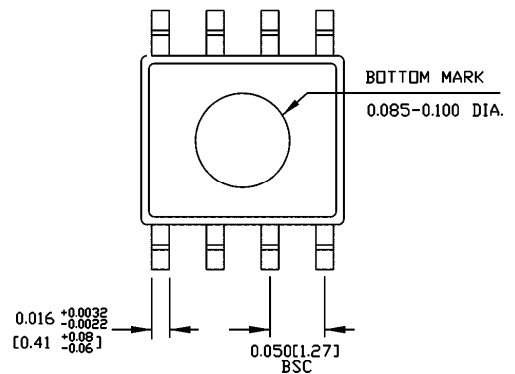

BOTTOM VIEW

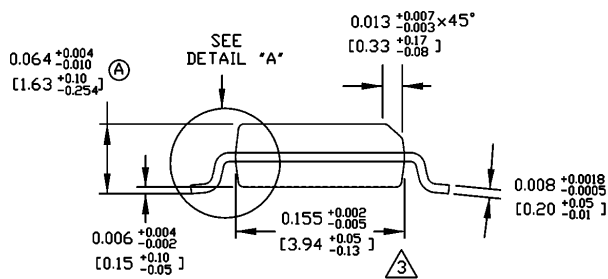


END VIEW

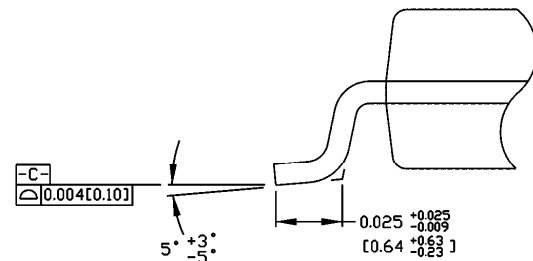


DETAIL "A"

8-Pin SOIC (M)



## Package Information (Continued)

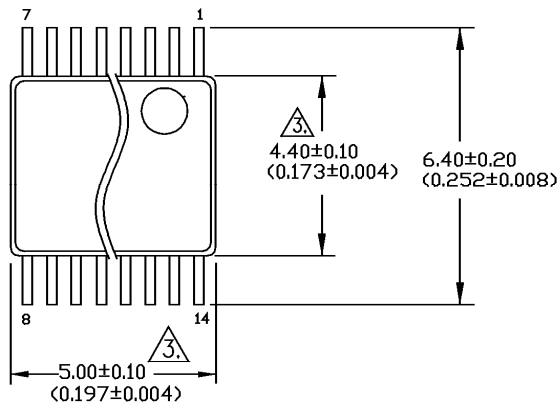

TOP VIEW

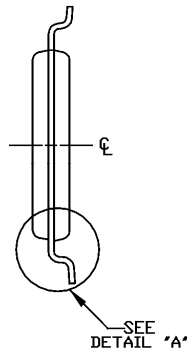

END VIEW

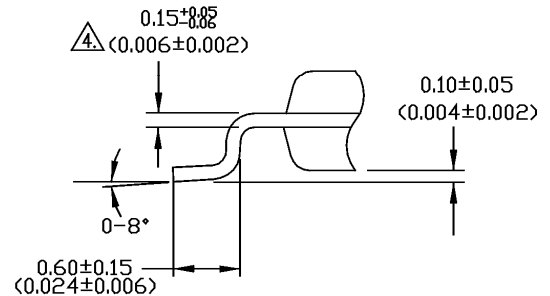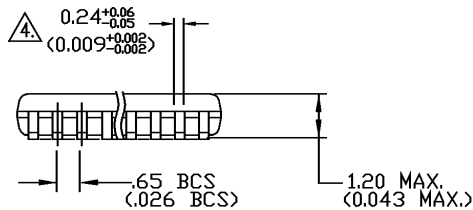DETAIL 'A'  
(VIEW ROTATED 90° C.W.)

SIDE VIEW

### 14-Pin TSSOP (TS)

**MICREL, INC. 2180 FORTUNE DRIVE SAN JOSE, CA 95131 USA**

TEL +1 (408) 944-0800 FAX +1 (408) 474-1000 WEB <http://www.micrel.com>

Micrel makes no representations or warranties with respect to the accuracy or completeness of the information furnished in this data sheet. This information is not intended as a warranty and Micrel does not assume responsibility for its use. Micrel reserves the right to change circuitry, specifications and descriptions at any time without notice. No license, whether express, implied, arising by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Micrel's terms and conditions of sale for such products, Micrel assumes no liability whatsoever, and Micrel disclaims any express or implied warranty relating to the sale and/or use of Micrel products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright or other intellectual property right.

Micrel Products are not designed or authorized for use as components in life support appliances, devices or systems where malfunction of a product can reasonably be expected to result in personal injury. Life support devices or systems are devices or systems that (a) are intended for surgical implant into the body or (b) support or sustain life, and whose failure to perform can be reasonably expected to result in a significant injury to the user. A Purchaser's use or sale of Micrel Products for use in life support appliances, devices or systems is a Purchaser's own risk and Purchaser agrees to fully indemnify Micrel for any damages resulting from such use or sale.

© 2004 Micrel, Incorporated.