

ELECTRICAL CHARACTERISTICS

Rating at 25 °C ambient temperature unless otherwise specified

TYPE	Breakdown Voltage @ It (Note 1)			Working Peak Reverse Voltage	Maximum Reverse Leakage @ VRWM	Maximum Reverse Current	Maximum Clamping Voltage @ IRSM	Maximum Temperature Co-efficient of VBR of VBR (% / °C)				
	VBR (V)		It						VRWM	IR	IRSM	VRSM
	Min.	Max.	(mA)						(V)	(μA)	(A)	(V)
P4KE6.8C	6.12	7.48	10	5.50	2000	38.0	10.8	0.057				
P4KE6.8CA	6.45	7.14	10	5.80	2000	40.0	10.5	0.057				
P4KE7.5C	6.75	8.25	10	6.05	1000	36.0	11.7	0.061				
P4KE7.5CA	7.13	7.88	10	6.40	1000	37.0	11.3	0.061				
P4KE8.2C	7.38	9.02	10	6.63	400	33.0	12.5	0.065				
P4KE8.2CA	7.79	8.61	10	7.02	400	35.0	12.1	0.065				
P4KE9.1C	8.19	10.0	1.0	7.37	100	30.0	13.8	0.068				
P4KE9.1CA	8.65	9.55	1.0	7.78	100	31.0	13.4	0.068				
P4KE10C	9.00	11.0	1.0	8.10	20	28.0	15.0	0.073				
P4KE10CA	9.50	10.5	1.0	8.55	20	29.0	14.5	0.073				
P4KE11C	9.90	12.1	1.0	8.92	10	26.0	16.2	0.075				
P4KE11CA	10.5	11.6	1.0	9.40	10	27.0	15.6	0.075				
P4KE12C	10.8	13.2	1.0	9.72	5.0	24.0	17.3	0.078				
P4KE12CA	11.4	12.6	1.0	10.2	5.0	25.0	16.7	0.078				
P4KE13C	11.7	14.3	1.0	10.5	5.0	22.0	19.0	0.081				
P4KE13CA	12.4	13.7	1.0	11.1	5.0	23.0	18.2	0.081				
P4KE15C	13.5	16.5	1.0	12.1	5.0	19.0	22.0	0.084				
P4KE15CA	14.3	15.8	1.0	12.8	5.0	20.0	21.2	0.084				
P4KE16C	14.4	17.6	1.0	12.9	5.0	18.0	23.5	0.086				
P4KE16CA	15.2	16.8	1.0	13.6	5.0	19.0	22.5	0.086				
P4KE18C	16.2	19.8	1.0	14.5	5.0	16.0	26.5	0.088				
P4KE18CA	17.1	18.9	1.0	15.3	5.0	17.0	25.5	0.088				
P4KE20C	18.0	22.0	1.0	16.2	5.0	14.0	29.1	0.090				
P4KE20CA	19.0	21.0	1.0	17.1	5.0	15.0	27.7	0.090				
P4KE22C	19.8	24.2	1.0	17.8	5.0	13.0	31.9	0.092				
P4KE22CA	20.9	23.1	1.0	18.8	5.0	14.0	30.6	0.092				
P4KE24C	21.6	26.4	1.0	19.4	5.0	12.0	34.7	0.094				
P4KE24CA	22.8	25.2	1.0	20.5	5.0	13.0	33.2	0.094				
P4KE27C	24.3	29.7	1.0	21.8	5.0	11.0	39.1	0.096				
P4KE27CA	25.7	28.4	1.0	23.1	5.0	11.2	37.5	0.096				
P4KE30C	27.0	33.0	1.0	24.3	5.0	10.0	43.5	0.097				
P4KE30CA	28.5	31.5	1.0	25.6	5.0	10.0	41.4	0.097				
P4KE33C	29.7	36.3	1.0	26.8	5.0	9.0	47.7	0.098				
P4KE33CA	31.4	34.7	1.0	28.2	5.0	9.0	45.7	0.098				
P4KE36C	32.4	39.6	1.0	29.1	5.0	8.0	52.0	0.099				
P4KE36CA	34.2	37.8	1.0	30.8	5.0	8.4	49.9	0.099				
P4KE39C	35.1	42.9	1.0	31.6	5.0	7.4	56.4	0.100				
P4KE39CA	37.1	41.0	1.0	33.3	5.0	7.8	53.9	0.100				
P4KE43C	38.7	47.3	1.0	34.8	5.0	6.8	61.9	0.101				
P4KE43CA	40.9	45.2	1.0	36.8	5.0	7.1	59.3	0.101				
P4KE47C	42.3	51.7	1.0	38.1	5.0	6.2	67.8	0.101				
P4KE47CA	44.7	49.4	1.0	40.2	5.0	6.5	64.8	0.101				
P4KE51C	45.9	56.1	1.0	41.3	5.0	5.7	73.5	0.102				
P4KE51CA	48.5	53.6	1.0	43.6	5.0	6.0	70.1	0.102				
P4KE56C	50.4	61.6	1.0	45.4	5.0	5.2	80.5	0.103				
P4KE56CA	53.2	58.8	1.0	47.8	5.0	5.5	77.0	0.103				

ELECTRICAL CHARACTERISTICS

Rating at 25 °C ambient temperature unless otherwise specified

TYPE	Breakdown Voltage @ It (Note 1)			Working Peak Reverse Voltage VRWM	Maximum Reverse Leakage @ VRWM IR	Maximum Reverse Current IRSM	Maximum Clamping Voltage @ IRSM VRSM	Maximum Temperature Co-efficient of VBR of VBR (% / °C)
	VBR (V)		It					
	Min.	Max.	(mA)					
P4KE62C	55.8	68.2	1.0	50.2	5.0	4.7	89.0	0.104
P4KE62CA	58.9	65.1	1.0	53.0	5.0	5.0	85.0	0.104
P4KE68C	61.2	74.8	1.0	55.1	5.0	4.3	98.0	0.104
P4KE68CA	64.6	71.4	1.0	58.1	5.0	4.6	92.0	0.104
P4KE75C	67.5	82.5	1.0	60.7	5.0	3.9	108	0.105
P4KE75CA	71.3	78.8	1.0	64.1	5.0	4.1	103	0.105
P4KE82C	73.8	90.2	1.0	66.4	5.0	3.6	118	0.105
P4KE82CA	77.9	86.1	1.0	70.1	5.0	3.7	113	0.105
P4KE91C	81.9	100	1.0	73.7	5.0	3.2	131	0.106
P4KE91CA	86.5	95.5	1.0	77.8	5.0	3.4	125	0.106
P4KE100C	90.0	110	1.0	81.0	5.0	2.9	144	0.106
P4KE100CA	95.0	105	1.0	85.5	5.0	3.1	137	0.106
P4KE110C	99.0	121	1.0	89.2	5.0	2.7	158	0.107
P4KE110CA	105	116	1.0	94.0	5.0	2.8	152	0.107
P4KE120C	108	132	1.0	97.2	5.0	2.4	173	0.107
P4KE120CA	114	126	1.0	102	5.0	2.5	165	0.107
P4KE130C	117	143	1.0	105	5.0	2.2	187	0.107
P4KE130CA	124	137	1.0	111	5.0	2.3	179	0.107
P4KE150C	135	165	1.0	121	5.0	2.0	215	0.108
P4KE150CA	143	158	1.0	128	5.0	2.0	207	0.108
P4KE160C	144	176	1.0	130	5.0	1.8	230	0.108
P4KE160CA	152	168	1.0	136	5.0	1.9	219	0.108
P4KE170C	153	187	1.0	138	5.0	1.7	244	0.108
P4KE170CA	162	179	1.0	145	5.0	1.8	234	0.108
P4KE180C	162	198	1.0	146	5.0	1.6	258	0.108
P4KE180CA	171	189	1.0	154	5.0	1.7	246	0.108
P4KE200C	180	220	1.0	162	5.0	1.5	287	0.108
P4KE200CA	190	210	1.0	171	5.0	1.53	274	0.108
P4KE220C	198	242	1.0	175	5.0	1.16	344	0.108
P4KE220CA	209	231	1.0	185	5.0	1.22	328	0.108
P4KE250C	225	275	1.0	202	5.0	1.11	360	0.110
P4KE250CA	237	263	1.0	214	5.0	1.16	344	0.110
P4KE300C	270	330	1.0	243	5.0	0.93	430	0.110
P4KE300CA	285	315	1.0	256	5.0	0.97	414	0.110
P4KE350C	315	385	1.0	284	5.0	0.79	504	0.110
P4KE350CA	332	368	1.0	300	5.0	0.83	482	0.110
P4KE400C	360	440	1.0	324	5.0	0.70	574	0.110
P4KE400CA	380	420	1.0	342	5.0	0.73	548	0.110
P4KE440C	396	484	1.0	356	5.0	0.95	631	0.110
P4KE440CA	418	462	1.0	376	5.0	1.00	602	0.110

Note:

(1) V_{BR} measured after I_t applied for 300 μs , I_t = square wave pulse or equivalent.

RATING AND CHARACTERISTIC CURVES (P4KE6.8C SERIES)

FIG.1 - PULSE DERATING CURVE

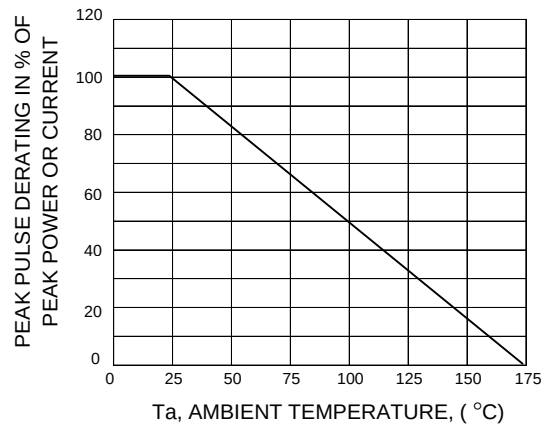


FIG.2 - PULSE WAVEFORM

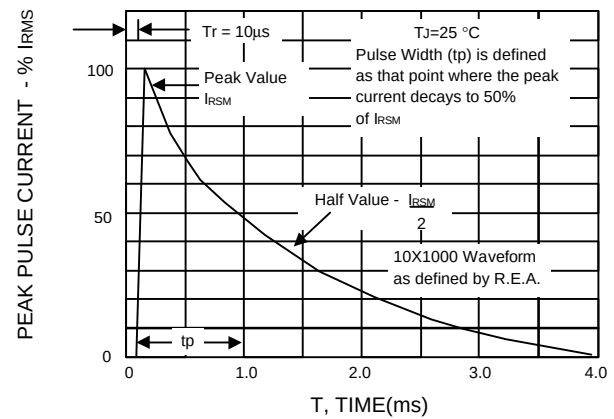


FIG.3 - STEADY STATE POWER DERATING

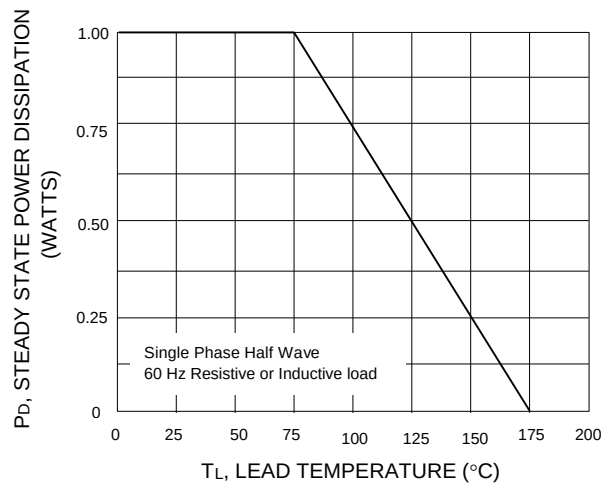


FIG.4 - PULSE RATING CURVE

