

BINDING POSTS

Designers
Choice





All Keystone binding posts are designed to prevent accidental contact with current carrying parts. They feature a "limited opening" captivated head to insure safety. Ideal for audio circuitry, R.F. Circuitry, oscilloscopes, power supplies and various other applications.

These multi-purpose binding posts feature high current rating, captivated heads and anti-rotation stud mounting.

NOTE: Binding Posts accept .175" Banana Plugs, .080" Tip Plugs, Spade Lugs, Alligator Clips, Wires and EZ hooks.

STANDARD BINDING POST



Mounting Detail

MATERIAL

Stud: Brass per QQ-B-626

Finish: Silver Plate

Insulation: Nylon

RATINGS

Current: 15 Amps

Breakdown voltage: 5700 VRMS



Stud to panel capacitance: 3.3 pF Nominal

FOR PANELS UP TO .281" THICK

CAT. NO.	COLOR
7004	RED
7005	BLACK

MINIATURE FLUTED HEAD

Rated 15 Amperes, 1000 VAC Working. Stud: Brass per ASTM B-16 Nylon Insulation. Choice of Gold or Tin Plate.

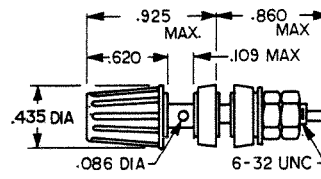

Mounting Detail

GOLD PLATE

CAT. NO.	COLOR
7012	RED
7013	BLACK

TIN PLATE

CAT. NO.	COLOR
7014	RED
7015	BLACK


ECONOMY BINDING POST

Rated 15 Amps, 1000 VAC working.

Stud: Brass per ASTM -B16

Finish: Nickel Plate

Insulation: Nylon




FOR PANELS UP TO .313 THICK


CAT. NO.	COLOR
7006	RED
7007	BLACK

STANDARD HEX HEAD

Rated 30 Amperes, 1000 VAC Working. Nylon Insulation. Stud: Brass per ASTM B-16. Choice of Gold or Tin Plate.



Mounting Detail



GOLD PLATE



CAT. NO.	TH'D	COLOR
4096	8-32	RED
4097	8-32	BLACK
7016	10-32	RED
7017	10-32	BLACK

TIN PLATE

CAT. NO.	TH'D	COLOR
4091	8-32	RED
4092	8-32	BLACK
4093	10-32	RED
4094	10-32	BLACK

STANDARD DUAL HEAD

Rated 30 Amperes, 1000 VAC working. Studs: Brass per ASTM B-16. Nylon Insulation. Mounts in .500 holes on .750 centers. Supplied with: 1 Red-1 Black head. Choice of Gold or Tin Plate.



GOLD PLATE



CAT. NO.	THREAD
4108	8-32
4109	10-32

TIN PLATE

CAT. NO.	THREAD
7018	8-32
7019	10-32

DUAL BANANA PLUGS

Spring: Nickel Silver. Body: Brass per ASTM B-16. Finish: Nickel Plate. Insulation: Molded Nylon. .750 Mounting Centers. Breakdown: 3500 VRMS

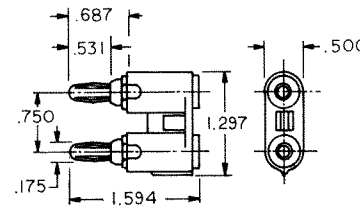

SOLDERLESS WITH SET SCREW

CAT. NO.	COLOR
6088	RED
6089	BLACK