




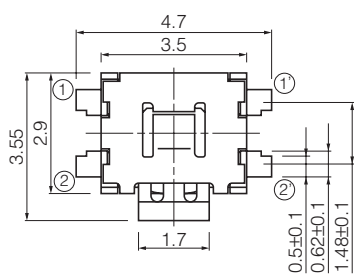









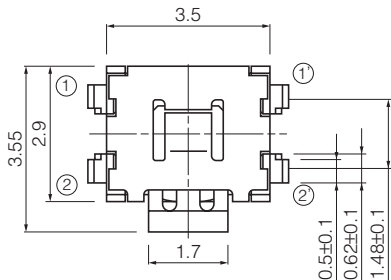








■ Dimensions in mm (not to scale)

No. 1 EVQP7A EVQP7J (Embossed Taping) With straight terminals Without boss 		     PWB land pattern for reference			
Part Numbers		Operating Force	Height	Push Plate Color	Operating Life
EVQP7A01K		2.2 N	1.35 mm	Black	100000 cycles
EVQP7J01K		1.6 N	1.35 mm	Black	100000 cycles
No. 2 EVQP7C EVQP7L (Embossed Taping) With straight terminals With boss 		     PWB land pattern for reference			
Part Numbers		Operating Force	Height	Push Plate Color	Operating Life
EVQP7C01K		2.2 N	1.35 mm	Black	100000 cycles
EVQP7L01K		1.6 N	1.35 mm	Black	100000 cycles

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.





■ Dimensions in mm (not to scale)

No. 3 EVQP7B EVQP7K (Embossed Taping) With J-bent terminals Without boss 		 Circuit diagram PWB land pattern for reference			
Part Numbers		Operating Force	Height	Push Plate Color	Operating Life
EVQP7B01K		2.2 N	1.35 mm	Black	100000 cycles
EVQP7K01K		1.6 N	1.35 mm	Black	100000 cycles

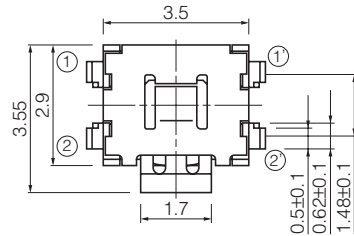
No. 4 EVQP7D EVQP7M (Embossed Taping) With J-bent terminals With boss 		 Circuit diagram PWB land pattern for reference			
Part Numbers		Operating Force	Height	Push Plate Color	Operating Life
EVQP7D01K		2.2 N	1.35 mm	Black	100000 cycles
EVQP7M01K		1.6 N	1.35 mm	Black	100000 cycles

Design and specifications are each subject to change without notice. Ask factory for the current technical specifications before purchase and/or use.
Should a safety concern arise regarding this product, please be sure to contact us immediately.


■ Dimensions in mm (not to scale)

No. 5 EVQP3 EVQ9P (Embossed Taping) With L-shape terminals Without boss 	   Circuit diagram  PWB land pattern for reference			
Part Numbers	Operating Force	Height	Push Plate Color	Operating Life
EVQP3401K	2.2 N	1.35 mm	Black	100000 cycles
EVQ9P701K	1.6 N	1.35 mm	Black	100000 cycles

■ Recommended Reflow Soldering Conditions

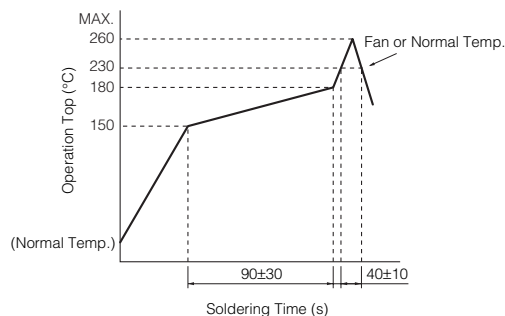

● Embossed Carrier Taping

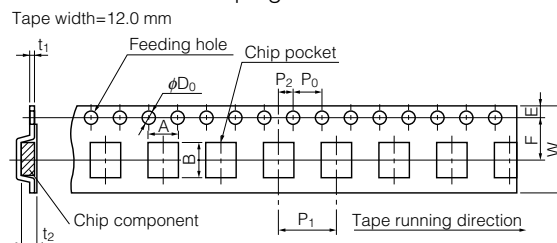

● Straight terminals, L-shape terminals type

Unit: mm


Part No.	Height	A	B	W	F	E	P ₁	P ₂	P ₀	D ₀ Dia.	t ₁	t ₂
EVQP7, EVQP3 EVQ9P7	1.35	5.2±0.2	4.5±0.2	12.0±0.3	5.5±0.1	1.75±0.10	8.0±0.1	2.0±0.1	4.0±0.1	1.5 ^{+0.1} ₋₀	0.3±0.1	1.5±0.2

● J-bent type

Unit: mm

Part No.	Height	A	B	W	F	E	P ₁	P ₂	P ₀	D ₀ Dia.	t ₁	t ₂
EVQP7, EVQP3	1.35	4.5±0.2	4.5±0.2	12.0±0.3	5.5±0.1	1.75±0.10	8.0±0.1	2.0±0.1	4.0±0.1	1.5 ^{+0.1} ₋₀	0.3±0.1	1.5±0.2

● Standard Reel Dimensions in mm (not to scale)

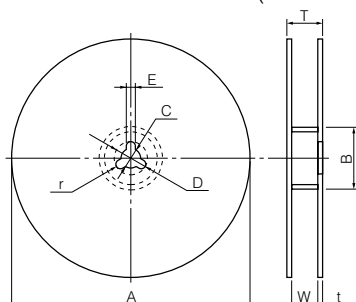

Item	A	B	C	D	E
Rate (mm)	φ380.0±2.0	φ80.0±1.0	φ13.0±0.5	φ21.0±1.0	2.0±0.5
Item	W	T	t	r	
Rate (mm)	13.5±1.0	17.5±1.0	1.0 to 3.0	1.0±0.5	