

# Inductors



## For Power Line

### SMD

## NLC Series NLC3225 Type

(We currently recommend that you switch to the NLCV32 type.)

### SHAPES AND DIMENSIONS/RECOMMENDED PC BOARD PATTERN

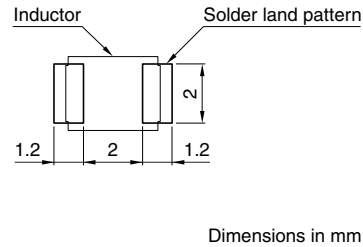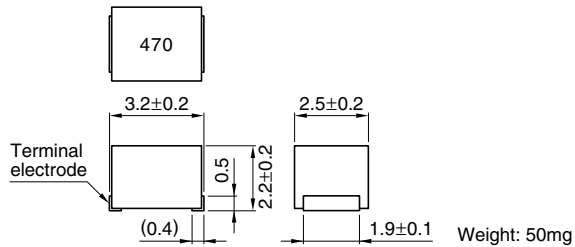

### ELECTRICAL CHARACTERISTICS


Inductance (μH)	Inductance tolerance	Q ref.	Test frequency L, Q (MHz)	Self-resonant frequency (MHz)min.	DC resistance (Ω)±30%	Rated current (mA)max.	Part No.
1	±20%	10	7.96	100	0.08	850	NLC322522T-1R0M
1.5	±20%	10	7.96	80	0.11	700	NLC322522T-1R5M
2.2	±20%	10	7.96	68	0.13	600	NLC322522T-2R2M
3.3	±20%	10	7.96	54	0.16	500	NLC322522T-3R3M
4.7	±20%	15	7.96	46	0.2	430	NLC322522T-4R7M
6.8	±20%	15	7.96	38	0.27	360	NLC322522T-6R8M
10	±10%	15	2.52	30	0.36	300	NLC322522T-100K
15	±10%	15	2.52	26	0.56	250	NLC322522T-150K
22	±10%	15	2.52	21	0.77	210	NLC322522T-220K
33	±10%	15	2.52	17	1.1	170	NLC322522T-330K
47	±10%	15	2.52	14	1.64	150	NLC322522T-470K
68	±10%	15	2.52	12	2.8	120	NLC322522T-680K
100	±10%	15	0.796	10	3.7	100	NLC322522T-101K
150	±10%	20	0.796	8	6.1	85	NLC322522T-151K
220	±10%	20	0.796	7	8.4	70	NLC322522T-221K
330	±10%	20	0.796	6	12.3	60	NLC322522T-331K

- Test equipment L, Q: YHP4194A IMPEDANCE ANALYZER+YHP16085A+YHP16093B+TF-1, or equivalent  
SRF: HP8753C NETWORK ANALYZER (Z<sub>in</sub>=Z<sub>out</sub>=50Ω), or equivalent  
Rdc: MATSUSHITA VP-2941A DIGITAL MILLIOHM METER, or equivalent


- Marking: Inductance tolerance is omitted to distinguish NL series.

### TYPICAL ELECTRICAL CHARACTERISTICS

#### INDUCTANCE CHANGE vs. DC SUPERPOSITION CHARACTERISTICS

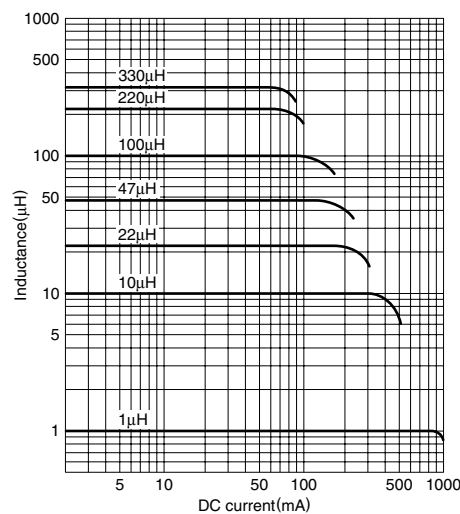

#### IMPEDANCE vs. FREQUENCY CHARACTERISTICS

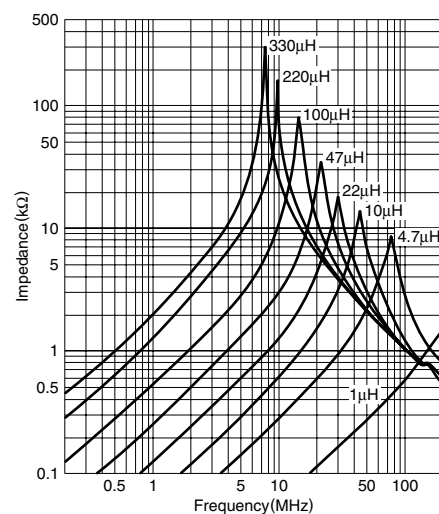

• All specifications are subject to change without notice.