


PIN STYLE	MATING
01	5.9
02	8
03	9.9
04	11.4
05	9.2
06	10.4
07	5.3
09	17.00
10	8.10
11	8.50
12	3.05
13	14.35
14	4.00
15	6.60
16	3.30

PLATING

- 1 = 0.76µm GOLD/GXT ON CONTACT AREA, 2µm TIN MIN ON TAIL
4 = 2µm TIN MIN FULL PLATED
5 = 0.25µm GOLD/GXT ON CONTACT AREA, 2µm TIN MIN ON TAIL
8 = 0.38µm GOLD/GXT ON CONTACT AREA, 2µm TIN MIN ON TAIL
- 1.27µm NICKEL MIN UNDERLAYER FOR ALL PLATING VERSIONS

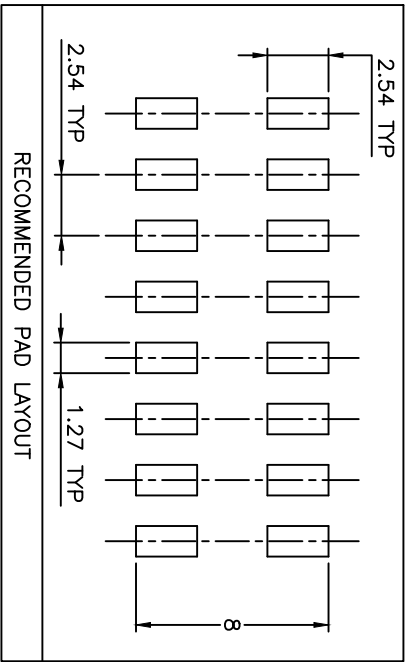

mat'l. code				surface			tolerance			projection		product family		
ltr	ecn	no	dr	date	ISO 1302			ISO 406			ISO 1101	BERGSTIK		
N	F08-0253	LMU	08.12.10		tolerances unless otherwise specified							UNSHR.HEADER		
P	B-18789	LMU	14.09.11		angles			linear			mm	DR SMT		
R	B-18983	LMU	14.10.03								mm			
S	B-20276	LMU	15.02.16	dr	D.LE			01.01.24				dwg no		
T	B-20561	AMA	15.03.26	engr	JM.C			01.01.24				sheet 2 of -		
U	F-22120	BVE	15.10.09	chr	JM.C			01.01.24				95278		
V	F-41211	DDE	21.06.15	appd	JF.N			01.01.24				CUSTOMER		
sheet	revision											Drawing		
index	sheet													