

TABLE OF CONTENTS

|                           |   |                                           |    |
|---------------------------|---|-------------------------------------------|----|
| Features .....            | 1 | Absolute Maximum Ratings .....            | 5  |
| Applications.....         | 1 | Thermal Resistance .....                  | 5  |
| General Description ..... | 1 | ESD Caution.....                          | 5  |
| Pin Configurations .....  | 1 | Typical Performance Characteristics ..... | 6  |
| Revision History .....    | 2 | Outline Dimensions .....                  | 13 |
| Specifications.....       | 3 | Ordering Guide .....                      | 14 |

REVISION HISTORY

2/11—Rev. 0 to Rev. A

|                                                |    |
|------------------------------------------------|----|
| Changes to Output Voltage Swing Parameter..... | 4  |
| Changes to Figure 42 .....                     | 12 |
| Updated Outline Dimensions .....               | 13 |
| Changes to Ordering Guide .....                | 14 |

12/05—Revision 0: Initial Version

## SPECIFICATIONS

$V_S = \pm 5.0\text{ V}$ ,  $T_A = 25^\circ\text{C}$ , unless otherwise specified.

Table 1.

| Parameter                    | Symbol               | Test Conditions/Comments                                                                                                                  | Min                            | Typ        | Max                  | Unit             |
|------------------------------|----------------------|-------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|------------|----------------------|------------------|
| INPUT CHARACTERISTICS        |                      |                                                                                                                                           |                                |            |                      |                  |
| Offset Voltage               | V <sub>OS</sub>      | 0°C ≤ T <sub>A</sub> ≤ 70°C<br>−40°C ≤ T <sub>A</sub> ≤ +125°C                                                                            |                                | 40         | 150<br>250<br>350    | μV<br>μV<br>μV   |
| Input Bias Current           | I <sub>B</sub>       | −40°C ≤ T <sub>A</sub> ≤ +125°C                                                                                                           |                                | 0.2        | 1                    | nA               |
| Input Offset Current         | I <sub>OS</sub>      | −40°C ≤ T <sub>A</sub> ≤ +125°C                                                                                                           |                                | 0.1        | 1                    | nA               |
| Input Voltage Range          |                      |                                                                                                                                           | −3.5                           |            | +3.5                 | V                |
| Common-Mode Rejection Ratio  | CMRR                 | V <sub>CM</sub> = ±3 V<br>−40°C ≤ T <sub>A</sub> ≤ +125°C                                                                                 | 120<br>120                     | 127        |                      | dB<br>dB         |
| Open-Loop Gain               | A <sub>VO</sub>      | R <sub>L</sub> = 2 kΩ to ground, V <sub>O</sub> = ±3 V<br>−40°C ≤ T <sub>A</sub> ≤ +125°C                                                 | 1000<br>1000                   | 10,000     |                      | V/mV<br>V/mV     |
| Offset Voltage Drift         | ΔV <sub>OS</sub> /ΔT | 0°C ≤ T <sub>A</sub> ≤ 70°C<br>−40°C ≤ T <sub>A</sub> ≤ +125°C                                                                            |                                | 0.5<br>0.5 | 1.8<br>1.4           | μV/°C<br>μV/°C   |
| OUTPUT CHARACTERISTICS       |                      |                                                                                                                                           |                                |            |                      |                  |
| Output Voltage Swing         | V <sub>OUT</sub>     | R <sub>L</sub> = 10 kΩ to ground<br>−40°C ≤ T <sub>A</sub> ≤ +125°C<br>R <sub>L</sub> = 2 kΩ to ground<br>−40°C ≤ T <sub>A</sub> ≤ +125°C | ±3.95<br>±3.95<br>±3.9<br>±3.9 | ±4.1       |                      | V<br>V<br>V<br>V |
| Short-Circuit Current        | I <sub>SC</sub>      |                                                                                                                                           |                                | 27         |                      | mA               |
| Output Current               | I <sub>O</sub>       | V <sub>O</sub> = 3.5 V                                                                                                                    |                                | 15         |                      | mA               |
| POWER SUPPLY                 |                      |                                                                                                                                           |                                |            |                      |                  |
| Power Supply Rejection Ratio | PSRR                 | V <sub>S</sub> = ±4.0 V to ±18.0 V<br>0°C ≤ T <sub>A</sub> ≤ 70°C<br>−40°C ≤ T <sub>A</sub> ≤ +125°C                                      | 115<br>115<br>110              | 130        |                      | dB<br>dB<br>dB   |
| Supply Current/Amplifier     | I <sub>SY</sub>      | V <sub>O</sub> = 0 V<br>0°C ≤ T <sub>A</sub> ≤ 70°C<br>−40°C ≤ T <sub>A</sub> ≤ +125°C                                                    |                                | 1.1        | 1.25<br>1.45<br>1.75 | mA<br>mA<br>mA   |
| DYNAMIC PERFORMANCE          |                      |                                                                                                                                           |                                |            |                      |                  |
| Slew Rate                    | SR                   | R <sub>L</sub> = 10 kΩ                                                                                                                    |                                | 0.2        |                      | V/μs             |
| Gain Bandwidth Product       | GBP                  |                                                                                                                                           |                                | 0.6        |                      | MHz              |
| Phase Margin                 |                      |                                                                                                                                           |                                | 80         |                      | Degrees          |
| NOISE PERFORMANCE            |                      |                                                                                                                                           |                                |            |                      |                  |
| Voltage Noise                | e <sub>n p-p</sub>   | 0.1 Hz to 10 Hz                                                                                                                           |                                | 0.28       |                      | μV p-p           |
| Voltage Noise Density        | e <sub>n</sub>       | f = 1 kHz                                                                                                                                 |                                | 10         |                      | nV/√Hz           |
| Current Noise Density        | i <sub>n</sub>       | f = 1 kHz                                                                                                                                 |                                | 0.074      |                      | pA/√Hz           |

# OP07D

$V_s = \pm 15\text{ V}$ ,  $T_A = 25^\circ\text{C}$ , unless otherwise specified.

Table 2.

| Parameter                     | Symbol                   | Test Conditions/Comments                                                                                                                                                                  | Min                                                    | Typ                        | Max                 | Unit                                                         |
|-------------------------------|--------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------|----------------------------|---------------------|--------------------------------------------------------------|
| <b>INPUT CHARACTERISTICS</b>  |                          |                                                                                                                                                                                           |                                                        |                            |                     |                                                              |
| Offset Voltage                | $V_{OS}$                 | $0^\circ\text{C} \leq T_A \leq 70^\circ\text{C}$<br>$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$                                                                                  |                                                        | 45                         | 150<br>250<br>350   | $\mu\text{V}$<br>$\mu\text{V}$<br>$\mu\text{V}$              |
| Input Bias Current            | $I_B$                    | $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$                                                                                                                                      |                                                        | 0.2                        | 1                   | nA                                                           |
| Input Offset Current          | $I_{OS}$                 | $-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$                                                                                                                                      |                                                        | 0.2                        | 1                   | nA                                                           |
| Input Voltage Range           |                          |                                                                                                                                                                                           | -13.5                                                  |                            | +13.5               | V                                                            |
| Common-Mode Rejection Ratio   | CMRR                     | $V_{CM} = \pm 13.0\text{ V}$<br>$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$                                                                                                      | 120                                                    | 140                        |                     | dB                                                           |
| Open-Loop Gain                | $A_{VO}$                 | $R_L = 2\text{ k}\Omega$ to ground, $V_O = \pm 11\text{ V}$<br>$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$                                                                       | 120<br>1000                                            | 10,000                     |                     | dB<br>V/mV                                                   |
| Offset Voltage Drift          | $\Delta V_{OS}/\Delta T$ | $0^\circ\text{C} \leq T_A \leq 70^\circ\text{C}$<br>$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$                                                                                  |                                                        | 0.5<br>0.5                 | 2.5<br>1.5          | $\mu\text{V}/^\circ\text{C}$<br>$\mu\text{V}/^\circ\text{C}$ |
| <b>OUTPUT CHARACTERISTICS</b> |                          |                                                                                                                                                                                           |                                                        |                            |                     |                                                              |
| Output Voltage Swing          | $V_{OUT}$                | $R_L = 10\text{ k}\Omega$ to ground<br>$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$<br>$R_L = 2\text{ k}\Omega$ to ground<br>$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$ | $\pm 13.95$<br>$\pm 13.9$<br>$\pm 13.75$<br>$\pm 13.7$ | $\pm 14$<br><br>$\pm 13.8$ |                     | V<br>V<br>V<br>V                                             |
| Short-Circuit Current         | $I_{SC}$                 |                                                                                                                                                                                           |                                                        | 30                         |                     | mA                                                           |
| Output Current                | $I_O$                    | $V_O = 13.5\text{ V}$                                                                                                                                                                     |                                                        | 15                         |                     | mA                                                           |
| <b>POWER SUPPLY</b>           |                          |                                                                                                                                                                                           |                                                        |                            |                     |                                                              |
| Power Supply Rejection Ratio  | PSRR                     | $V_s = \pm 4.0\text{ V}$ to $\pm 18.0\text{ V}$<br>$0^\circ\text{C} \leq T_A \leq 70^\circ\text{C}$<br>$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$                               | 115<br>115<br>110                                      | 130                        |                     | dB<br>dB<br>dB                                               |
| Supply Current/Amplifier      | $I_{SY}$                 | $V_O = 0\text{ V}$<br>$0^\circ\text{C} \leq T_A \leq 70^\circ\text{C}$<br>$-40^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$                                                            |                                                        | 1.1                        | 1.3<br>1.55<br>1.85 | mA<br>mA<br>mA                                               |
| <b>DYNAMIC PERFORMANCE</b>    |                          |                                                                                                                                                                                           |                                                        |                            |                     |                                                              |
| Slew Rate                     | SR                       | $R_L = 10\text{ k}\Omega$                                                                                                                                                                 |                                                        | 0.2                        |                     | V/ $\mu\text{s}$                                             |
| Gain Bandwidth Product        | GBP                      |                                                                                                                                                                                           |                                                        | 0.6                        |                     | MHz                                                          |
| Phase Margin                  |                          |                                                                                                                                                                                           |                                                        | 80                         |                     | Degrees                                                      |
| <b>NOISE PERFORMANCE</b>      |                          |                                                                                                                                                                                           |                                                        |                            |                     |                                                              |
| Voltage Noise                 | $e_{n\text{ p-p}}$       | 0.1 Hz to 10 Hz                                                                                                                                                                           |                                                        | 0.25                       |                     | $\mu\text{V p-p}$                                            |
| Voltage Noise Density         | $e_n$                    | $f = 1\text{ kHz}$                                                                                                                                                                        |                                                        | 10                         |                     | nV/ $\sqrt{\text{Hz}}$                                       |
| Current Noise Density         | $i_n$                    | $f = 1\text{ kHz}$                                                                                                                                                                        |                                                        | 0.074                      |                     | pA/ $\sqrt{\text{Hz}}$                                       |

## ABSOLUTE MAXIMUM RATINGS

Table 3.

| Parameter                            | Rating                                          |
|--------------------------------------|-------------------------------------------------|
| Supply Voltage                       | $\pm 18\text{ V}$                               |
| Input Voltage                        | $\pm V$ supply                                  |
| Differential Input Voltage           | $\pm 0.7\text{ V}$                              |
| Output Short-Circuit Duration to GND | Indefinite                                      |
| Storage Temperature Range            | $-65^{\circ}\text{C}$ to $+150^{\circ}\text{C}$ |
| Operating Temperature Range          | $-40^{\circ}\text{C}$ to $+125^{\circ}\text{C}$ |
| Junction Temperature Range           | $-65^{\circ}\text{C}$ to $+150^{\circ}\text{C}$ |
| Lead Temperature (Soldering, 10 sec) | $+300^{\circ}\text{C}$                          |

Stresses above those listed under Absolute Maximum Ratings may cause permanent damage to the device. This is a stress rating only; functional operation of the device at these or any other conditions above those indicated in the operational section of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

### THERMAL RESISTANCE

$\theta_{JA}$  is specified for worst-case conditions, that is, a device soldered in a circuit board for surface-mount packages.

Table 4.

| Package Type      | $\theta_{JA}$ | $\theta_{JC}$ | Unit                        |
|-------------------|---------------|---------------|-----------------------------|
| 8-Lead DIP (N-8)  | 103           | 43            | $^{\circ}\text{C}/\text{W}$ |
| 8-Lead SOIC (R-8) | 158           | 43            | $^{\circ}\text{C}/\text{W}$ |

### ESD CAUTION

ESD (electrostatic discharge) sensitive device. Electrostatic charges as high as 4000V readily accumulate on the human body and test equipment and can discharge without detection. Although this product features proprietary ESD protection circuitry, permanent damage may occur on devices subjected to high energy electrostatic discharges. Therefore, proper ESD precautions are recommended to avoid performance degradation or loss of functionality.



# TYPICAL PERFORMANCE CHARACTERISTICS

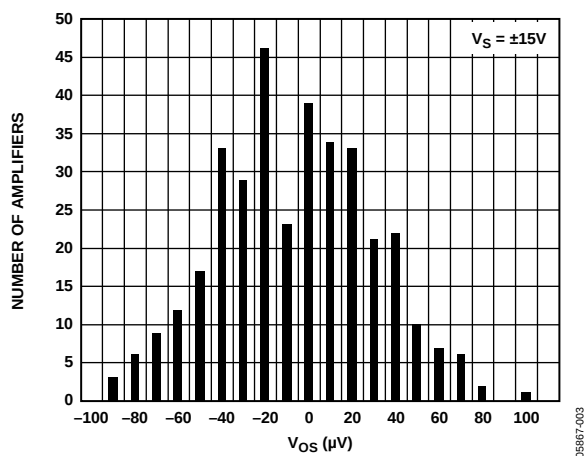


Figure 2. Number of Amplifiers vs. Offset Voltage

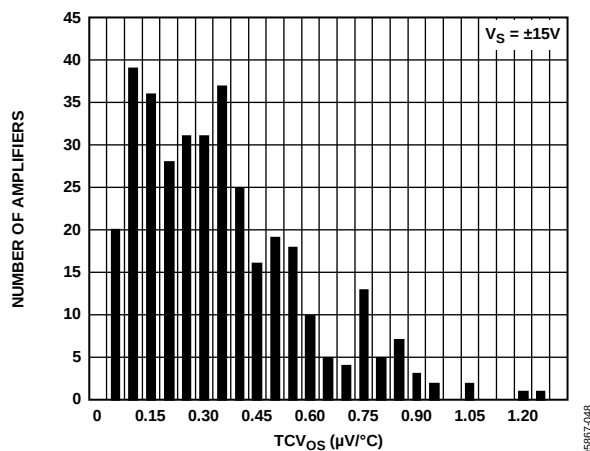


Figure 5. Number of Amplifiers vs.  $TCV_{OS}$

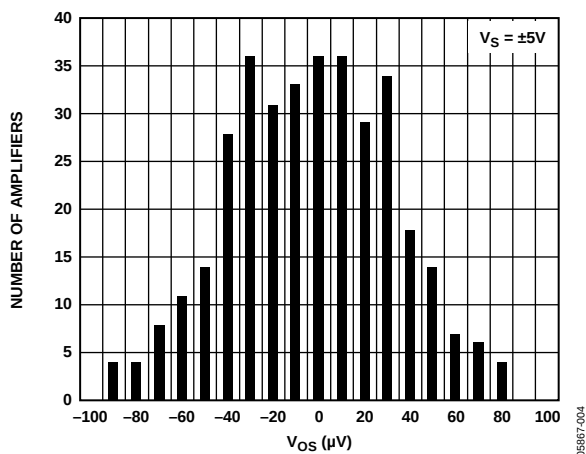


Figure 3. Number of Amplifiers vs. Offset Voltage

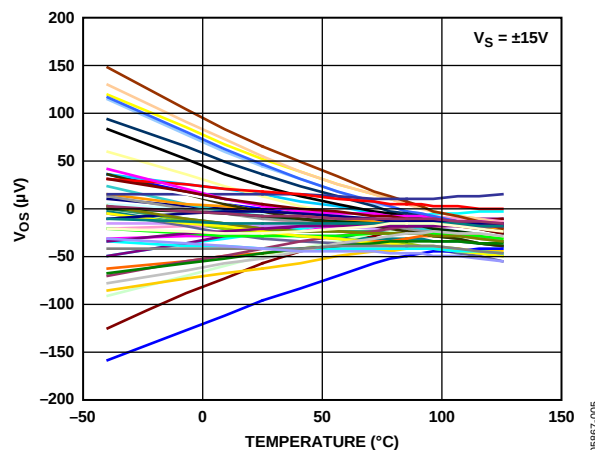


Figure 6. Offset Voltage vs. Temperature

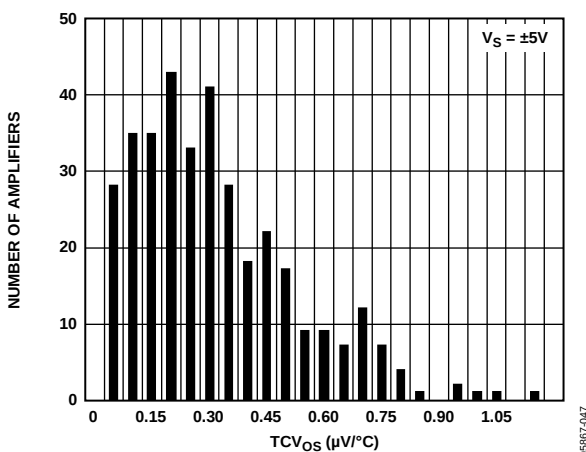


Figure 4. Number of Amplifiers vs.  $TCV_{OS}$

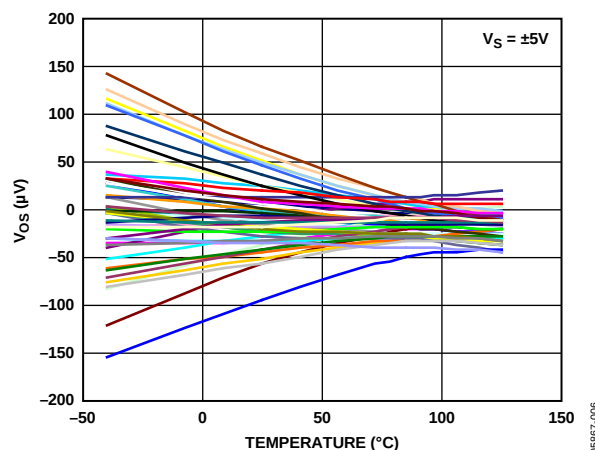


Figure 7. Offset Voltage vs. Temperature

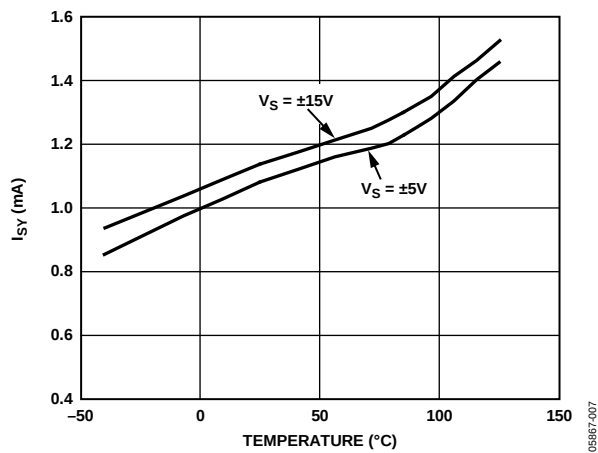


Figure 8. Supply Current vs. Temperature

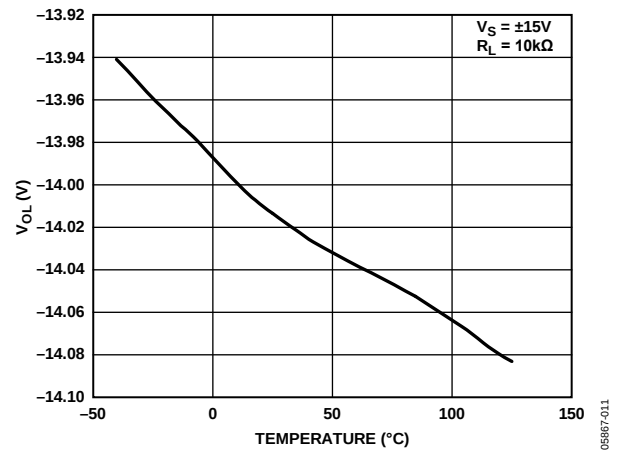


Figure 11. Negative Output Voltage Swing vs. Temperature

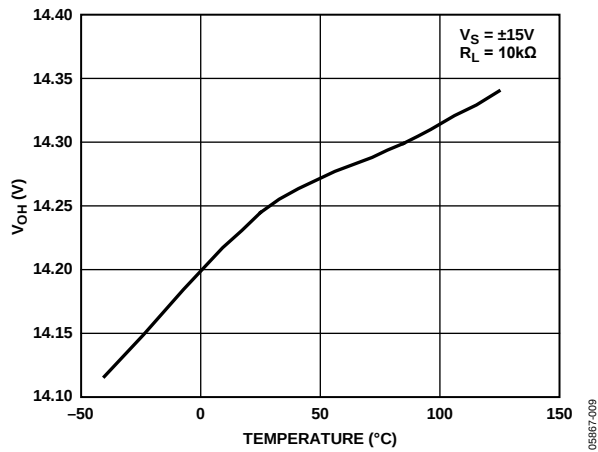


Figure 9. Positive Output Voltage Swing vs. Temperature

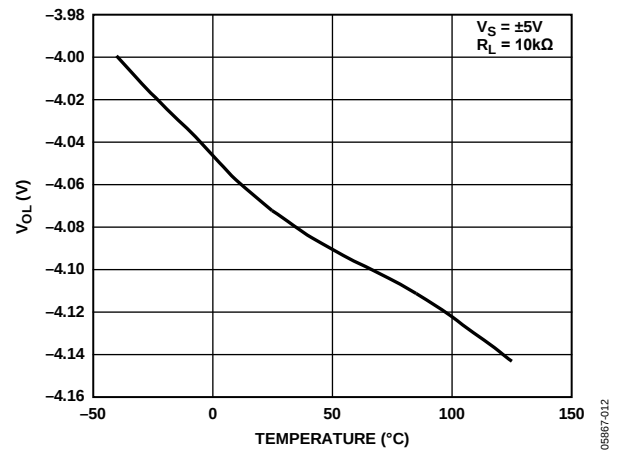


Figure 12. Negative Output Voltage Swing vs. Temperature

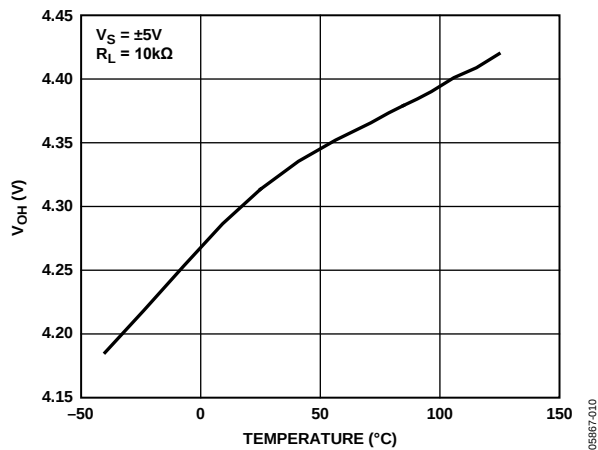


Figure 10. Positive Output Voltage Swing vs. Temperature

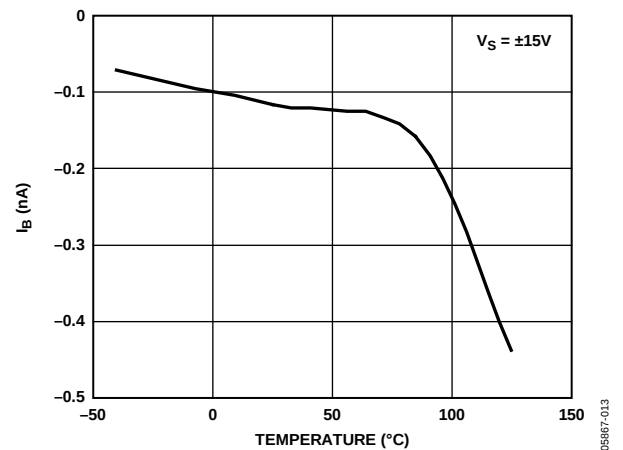


Figure 13. Input Bias Current vs. Temperature

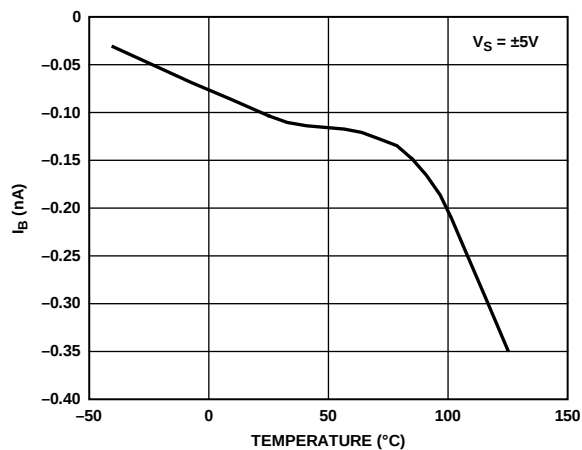


Figure 14. Input Bias Current vs. Temperature

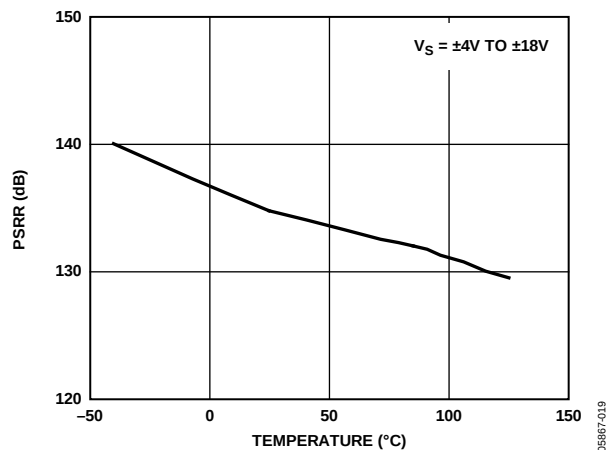


Figure 17. PSRR vs. Temperature

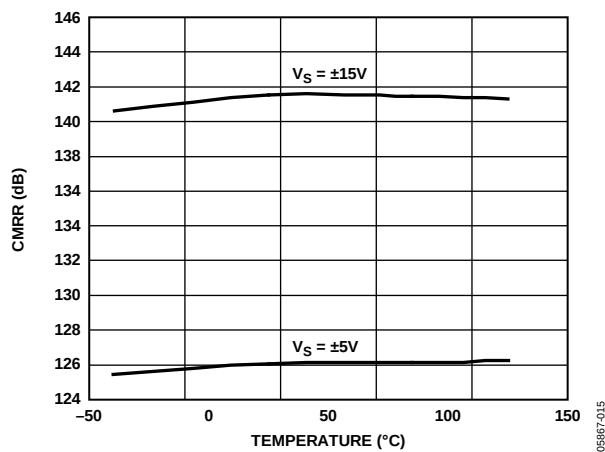


Figure 15. CMRR vs. Temperature

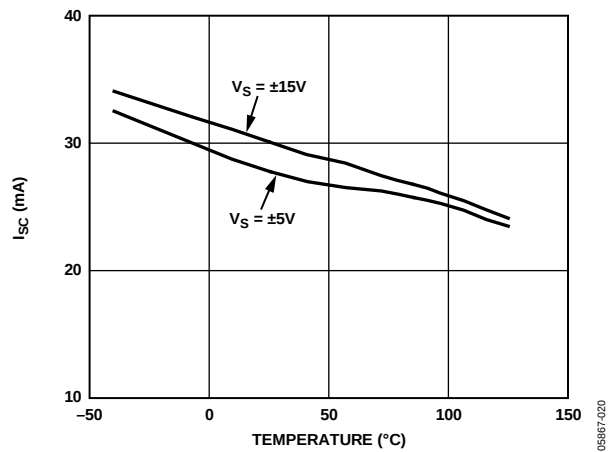


Figure 18. Short-Circuit Current vs. Temperature

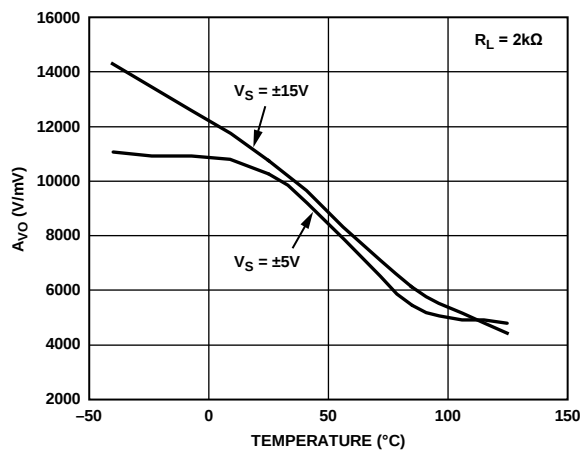


Figure 16. Open-Loop Gain vs. Temperature

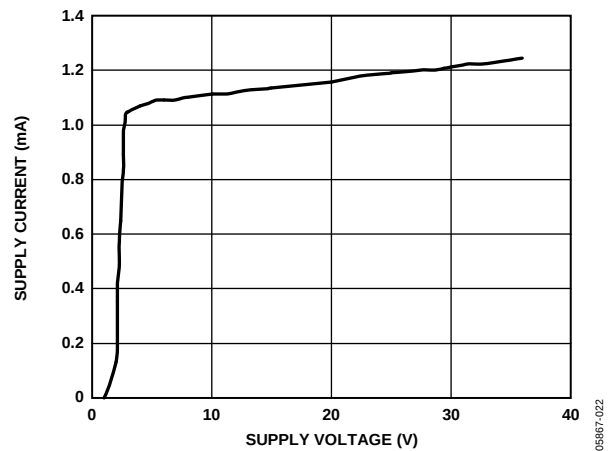


Figure 19. Supply Current vs. Supply Voltage

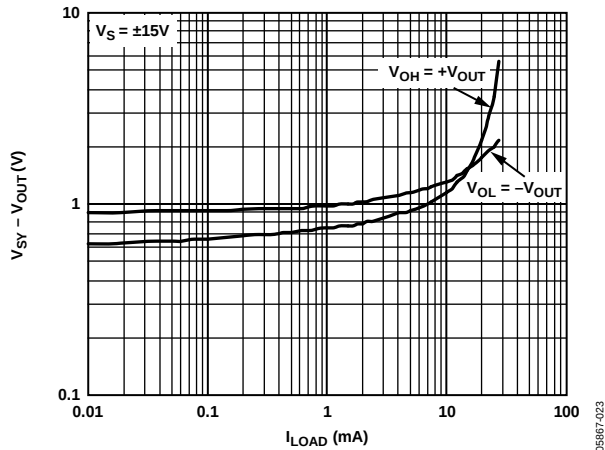


Figure 20. Output Voltage Swing vs. Load Current

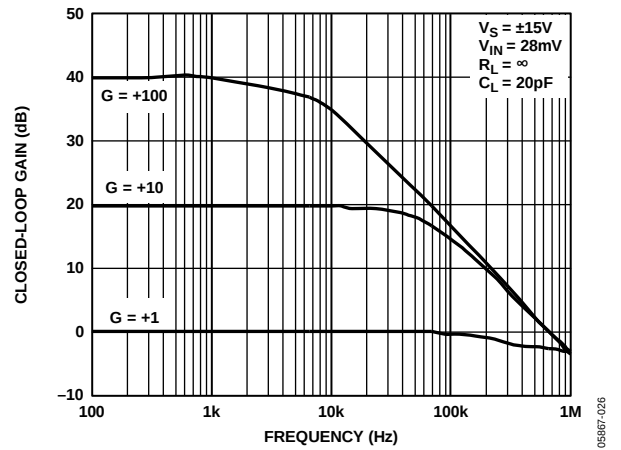


Figure 23. Closed-Loop Gain vs. Frequency

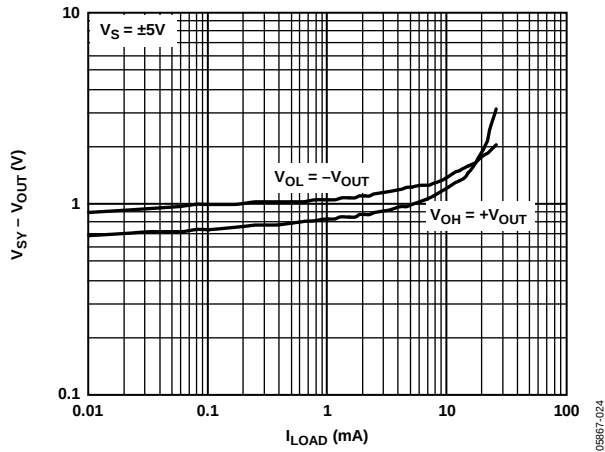


Figure 21. Output Voltage Swing vs. Load Current

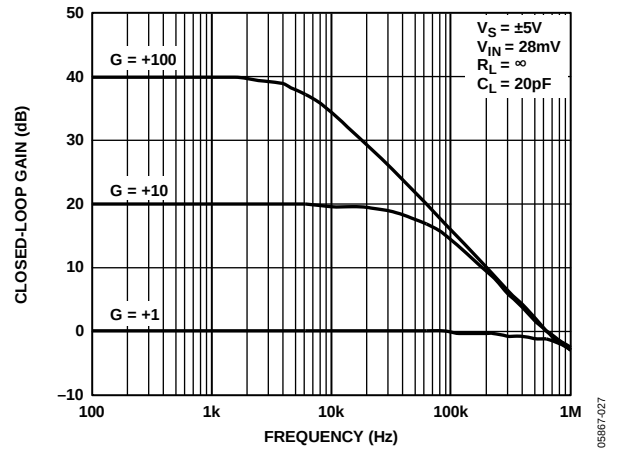


Figure 24. Closed-Loop Gain vs. Frequency

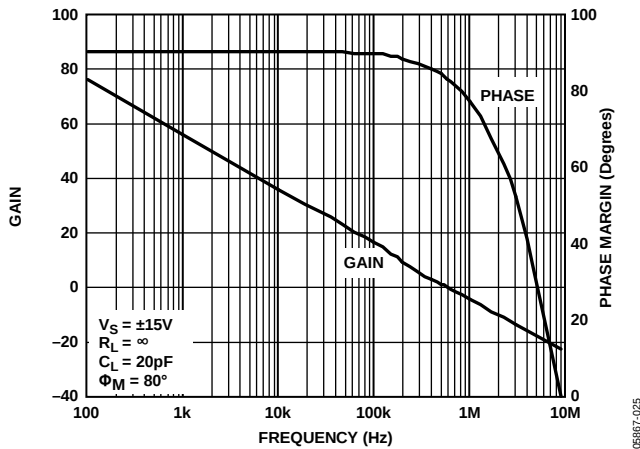


Figure 22. Open-Loop Gain and Phase vs. Frequency

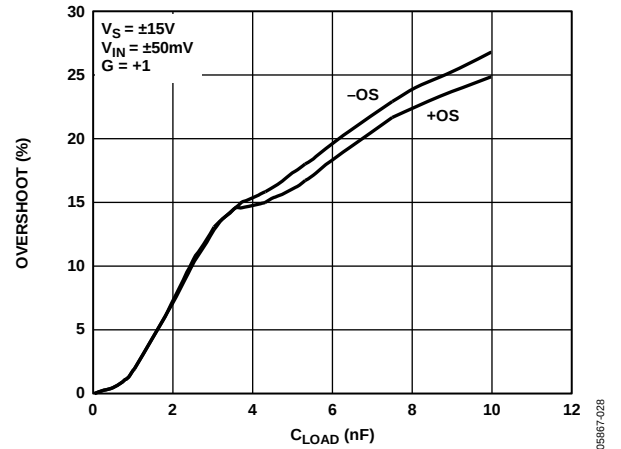


Figure 25. Overshoot vs. Capacitive Load

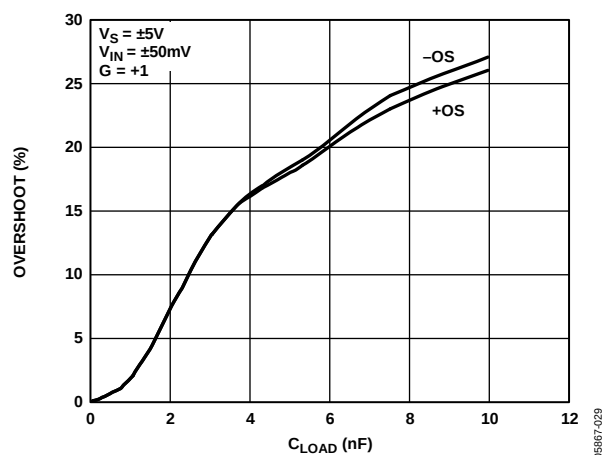


Figure 26. Overshoot vs. Capacitive Load

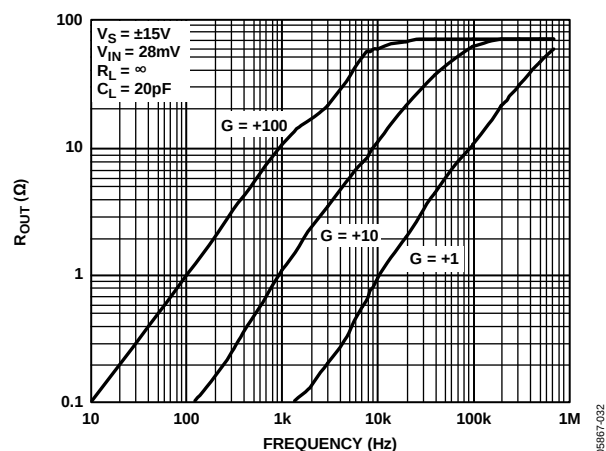


Figure 29. Output Impedance vs. Frequency

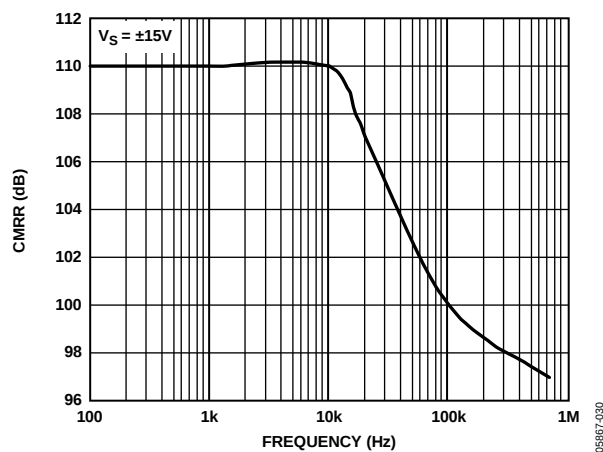


Figure 27. CMRR vs. Frequency

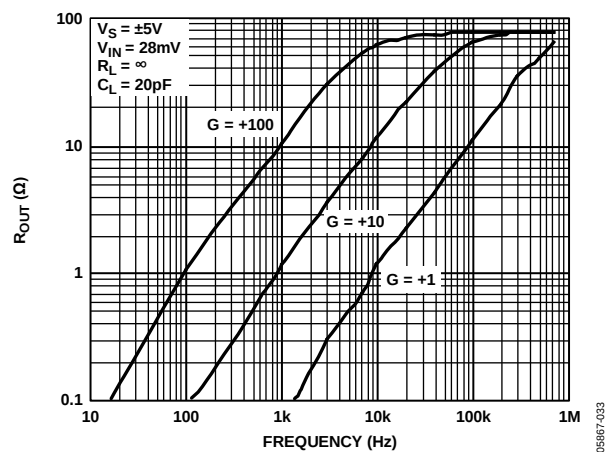


Figure 30. Output Impedance vs. Frequency

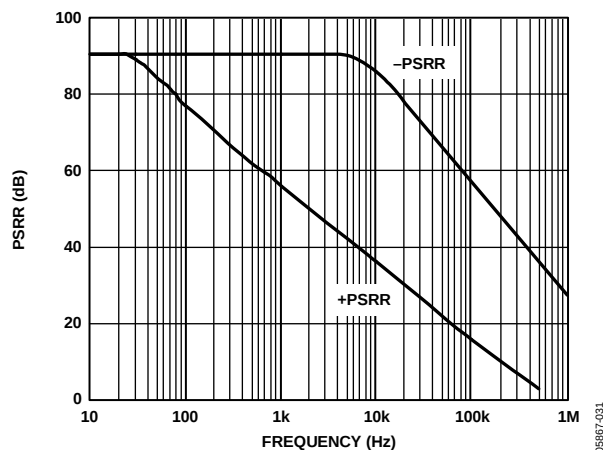


Figure 28. PSRR vs. Frequency

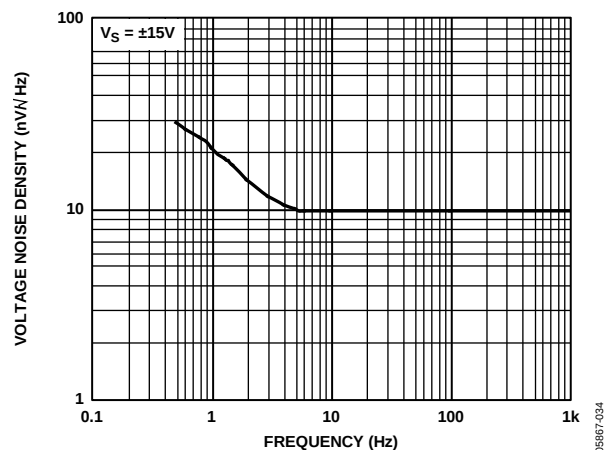


Figure 31. Voltage Noise Density vs. Frequency

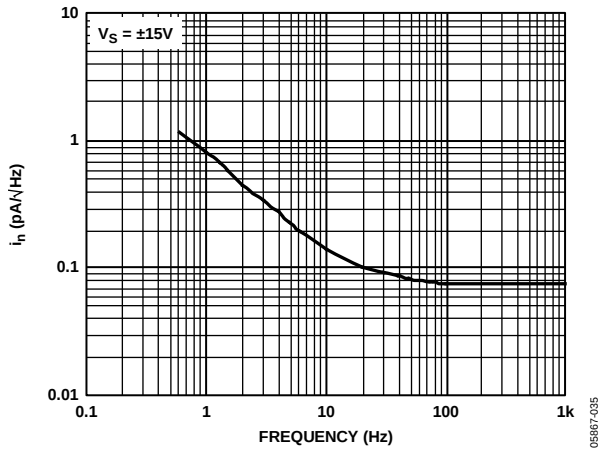


Figure 32. Current Noise Density vs. Frequency

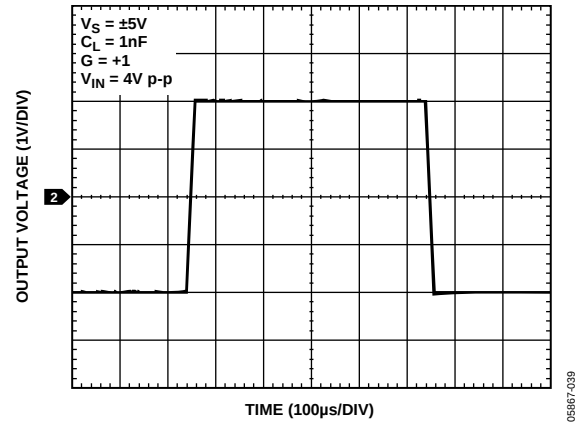


Figure 35. Large-Signal Transient

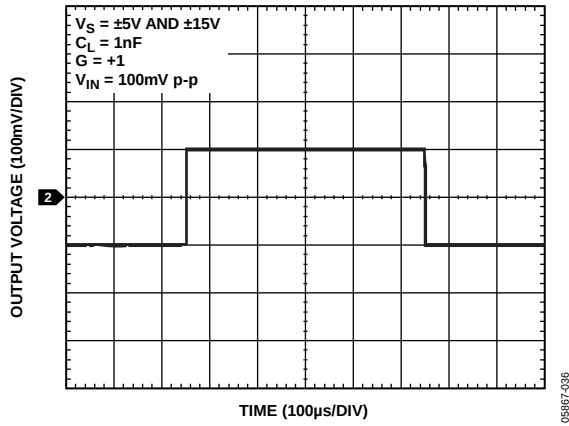


Figure 33. Small-Signal Transient

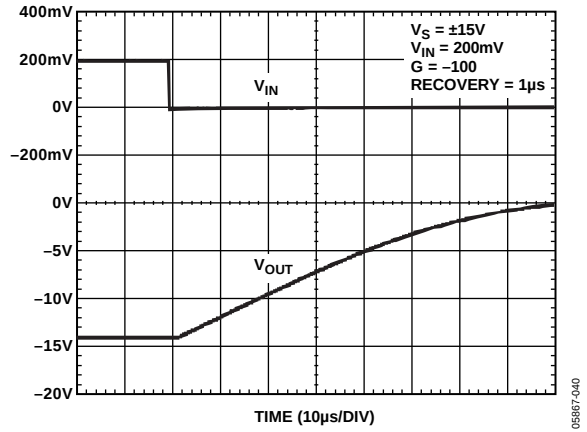


Figure 36. Positive Overload Recovery

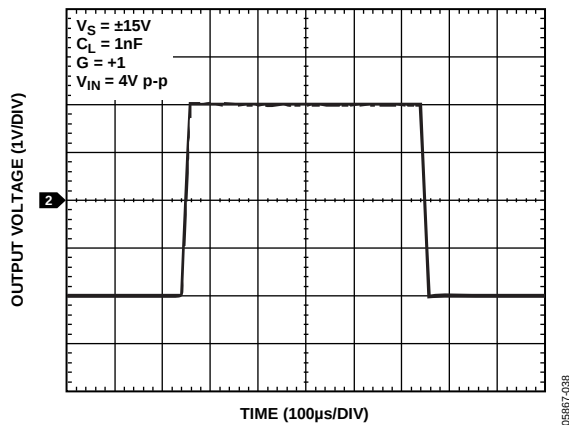


Figure 34. Large-Signal Transient

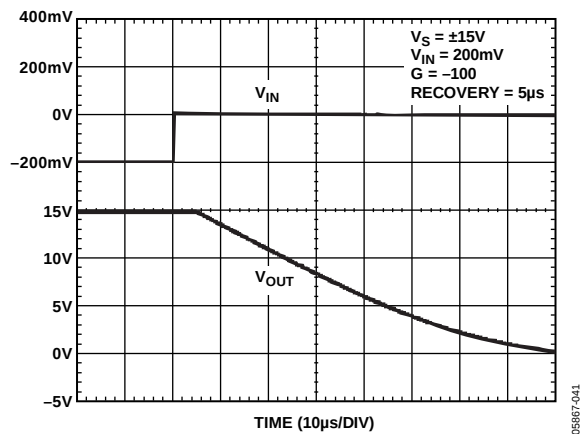


Figure 37. Negative Overload Recovery

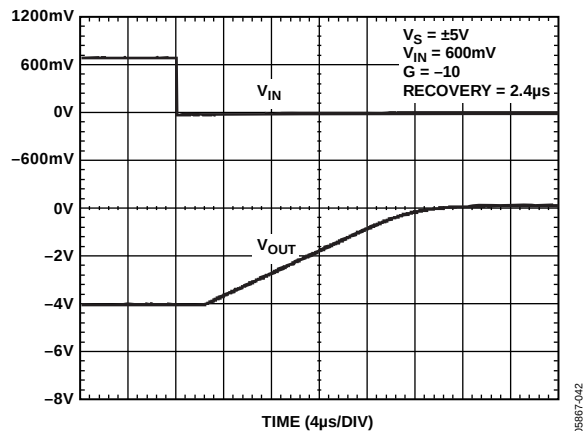


Figure 38. Positive Overload Recovery

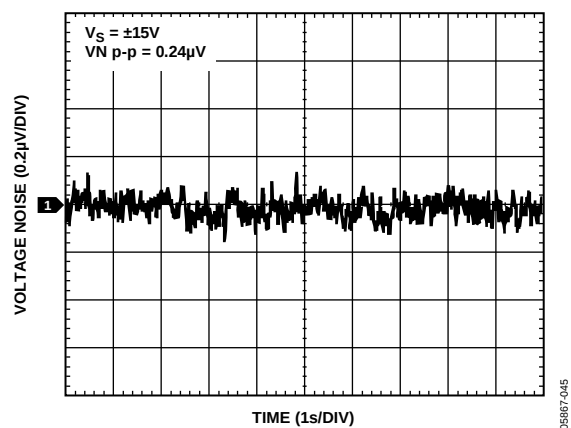


Figure 41. Voltage Noise (0.1 Hz to 10 Hz)

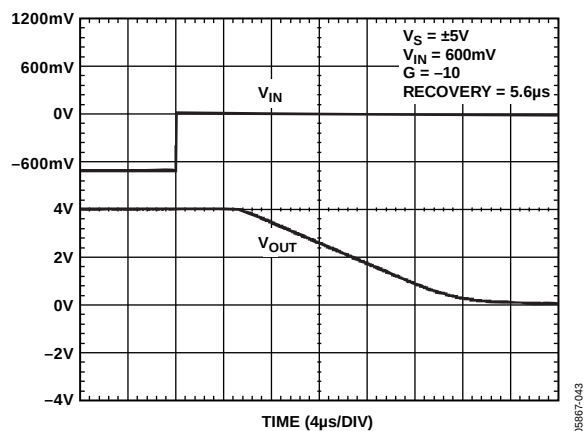


Figure 39. Negative Overload Recovery

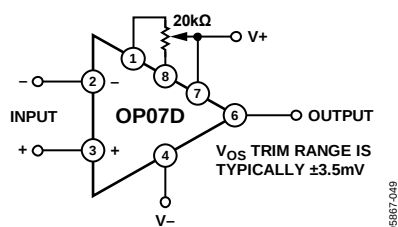


Figure 42. Optional Offset Nulling Circuit


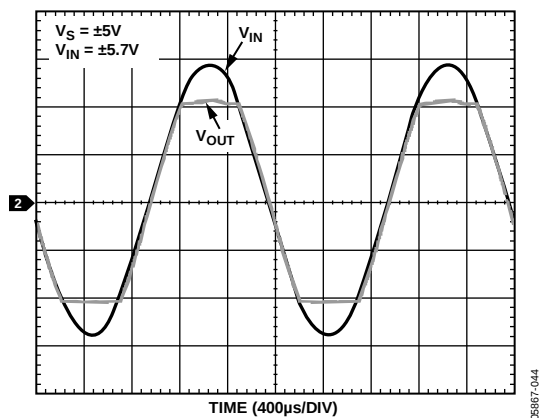


Figure 40. No Phase Reversal

# OUTLINE DIMENSIONS

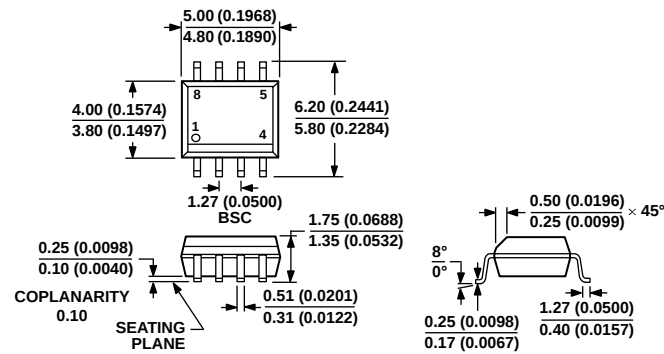


COMPLIANT TO JEDEC STANDARDS MS-012-AA  
CONTROLLING DIMENSIONS ARE IN MILLIMETERS; INCH DIMENSIONS  
(IN PARENTHESES) ARE ROUNDED-OFF MILLIMETER EQUIVALENTS FOR  
REFERENCE ONLY AND ARE NOT APPROPRIATE FOR USE IN DESIGN.

012407-A

Figure 43. 8-Lead Standard Small Outline Package [SOIC\_N]  
Narrow Body  
(R-8)

Dimensions shown in millimeters and (inches)

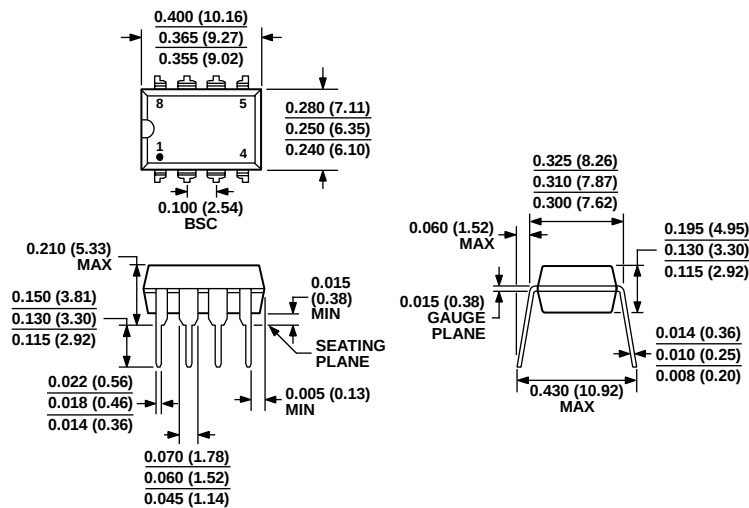

COMPLIANT TO JEDEC STANDARDS MS-001  
CONTROLLING DIMENSIONS ARE IN INCHES; MILLIMETER DIMENSIONS  
(IN PARENTHESES) ARE ROUNDED-OFF INCH EQUIVALENTS FOR  
REFERENCE ONLY AND ARE NOT APPROPRIATE FOR USE IN DESIGN.  
CORNER LEADS MAY BE CONFIGURED AS WHOLE OR HALF LEADS.

070606-A

Figure 44. 8-Lead Plastic Dual In-Line Package [PDIP]  
(N-8)

Dimensions shown in inches and (millimeters)

# OP07D

## ORDERING GUIDE

| Model <sup>1</sup> | Temperature Range | Package Description | Package Option |
|--------------------|-------------------|---------------------|----------------|
| OP07DNZ            | −40°C to +125°C   | 8-Lead PDIP         | N-8            |
| OP07DRZ            | −40°C to +125°C   | 8-Lead SOIC_N       | R-8            |
| OP07DRZ-REEL       | −40°C to +125°C   | 8-Lead SOIC_N       | R-8            |
| OP07DRZ-REEL7      | −40°C to +125°C   | 8-Lead SOIC_N       | R-8            |

<sup>1</sup> Z = RoHS Compliant Part.

NOTES

**OP07D**

**NOTES**