


## PACKAGE/ORDERING INFORMATION

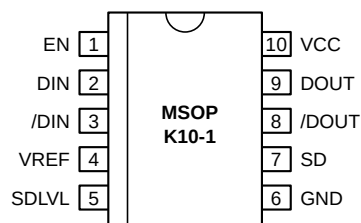

## Ordering Information

| Part Number                 | Package Type | Operating Range | Package Marking                      | Lead Finish    |
|-----------------------------|--------------|-----------------|--------------------------------------|----------------|
| SY88943VKC                  | K10-1        | Commercial      | 943V                                 | Sn-Pb          |
| SY88943VKCTR <sup>(1)</sup> | K10-1        | Commercial      | 943V                                 | Sn-Pb          |
| SY88943VKG                  | K10-1        | Commercial      | 943V with Pb-Free bar-line indicator | Pb-Free NiPdAu |
| SY88943VKGTR <sup>(1)</sup> | K10-1        | Commercial      | 943V with Pb-Free bar-line indicator | Pb-Free NiPdAu |

### Note:

1. Tape and Reel.

## PIN NAMES

| Pin               | Type                        | Function                                               |
|-------------------|-----------------------------|--------------------------------------------------------|
| D <sub>IN</sub>   | Data Input                  | Data Input                                             |
| /D <sub>IN</sub>  | Data Input                  | Inverting Data Input                                   |
| SD <sub>LVL</sub> | Input                       | SD Level Set                                           |
| EN                | TTL Input                   | Output Enable (Active High)                            |
| SD                | TTL Output (Open Collector) | Signal Detect                                          |
| GND               | Ground                      | Ground                                                 |
| /D <sub>OUT</sub> | PECL Output                 | Inverting Data Output                                  |
| D <sub>OUT</sub>  | PECL Output                 | Data Output                                            |
| V <sub>CC</sub>   | Power Supply                | Positive Power Supply                                  |
| V <sub>REF</sub>  | Output                      | Reference Voltage Output for SD Level Set (see Fig. 3) |

## GENERAL DESCRIPTION

### General

The SY88943V is an integrated limiting amplifier intended for high-frequency fiber-optic applications. The circuit connects to typical transimpedance amplifiers found within a fiber-optics link. The linear signal output from a transimpedance amplifier can contain significant amounts of noise, and may vary in amplitude over time. The SY88943V limiting amplifier quantizes the signal and outputs a voltage-limited waveform.

The EN pin allows the user to disable the output signal without removing the input signal.

## ABSOLUTE MAXIMUM RATINGS<sup>(1)</sup>

| Symbol                               | Rating                         | Value                                        | Unit |
|--------------------------------------|--------------------------------|----------------------------------------------|------|
| V <sub>CC</sub>                      | Power Supply Voltage           | 0 to +7.0                                    | V    |
| D <sub>IN</sub> , /D <sub>IN</sub>   | Input Voltage                  | 0 to V <sub>CC</sub>                         | V    |
| D <sub>OUT</sub> , /D <sub>OUT</sub> | Output Voltage (with 50Ω load) | V <sub>CC</sub> -2.5 to V <sub>CC</sub> +0.3 | V    |
| EN                                   | Input Voltage                  | 0 to V <sub>CC</sub>                         | V    |
| SD <sub>LVL</sub>                    | Input Voltage                  | 0 to V <sub>CC</sub>                         | V    |
| V <sub>REF</sub>                     | Output Voltage                 | V <sub>CC</sub> -2.0 to V <sub>CC</sub>      | V    |
| T <sub>A</sub>                       | Operating Temperature Range    | -40 to +85                                   | °C   |
| T <sub>store</sub>                   | Storage Temperature Range      | -55 to +125                                  | °C   |

### Note:

1. Permanent device damage may occur if absolute maximum ratings are exceeded. This is a stress rating only and functional operation is not implied at conditions other than those detailed in the operational sections of this data sheet. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

**DC ELECTRICAL CHARACTERISTICS**
 $V_{CC} = +5V \pm 10\%$ ,  $R_{LOAD} = 50\Omega$  to  $V_{CC} - 2V$ 

| Symbol       | Parameter                                         | $T_A = -40^\circ C$ |                                         | $T_A = 0^\circ C$   |                                         | $T_A = +25^\circ C$ |                 |                                         | $T_A = +85^\circ C$ |                                         | Unit    |
|--------------|---------------------------------------------------|---------------------|-----------------------------------------|---------------------|-----------------------------------------|---------------------|-----------------|-----------------------------------------|---------------------|-----------------------------------------|---------|
|              |                                                   | Min.                | Max.                                    | Min.                | Max.                                    | Min.                | Typ.            | Max.                                    | Min.                | Max.                                    |         |
| $I_{CC}$     | Power Supply Current <sup>(1)</sup><br>5V<br>3.3V | —                   | 40                                      | —                   | 40                                      | —                   | 33              | 40                                      | —                   | 45                                      | mA      |
| $I_{IL}$     | EN Input LOW Current                              | -0.3 <sup>(6)</sup> | —                                       | -0.3 <sup>(6)</sup> | —                                       | -0.3 <sup>(6)</sup> | —               | —                                       | -0.3 <sup>(6)</sup> | —                                       | mA      |
| $I_{IH}$     | EN Input HIGH Current                             | —                   | 20 <sup>(4)</sup><br>100 <sup>(5)</sup> | —                   | 20 <sup>(4)</sup><br>100 <sup>(5)</sup> | —                   | —               | 20 <sup>(4)</sup><br>100 <sup>(5)</sup> | —                   | 20 <sup>(4)</sup><br>100 <sup>(5)</sup> | $\mu A$ |
| $V_{CMR}$    | Common Mode Range                                 | GND +2.0            | $V_{CC}$                                | GND +2.0            | $V_{CC}$                                | GND +2.0            | —               | $V_{CC}$                                | GND +2.0            | $V_{CC}$                                | V       |
| $V_{offset}$ | Differential Output Offset                        | —                   | $\pm 100$                               | —                   | $\pm 100$                               | —                   | $\pm 17$        | $\pm 100$                               | —                   | $\pm 100$                               | mV      |
| $SD_{LVL}$   | $SD_{LVL}$ Level                                  | $V_{REF}$           | $V_{CC}$                                | $V_{REF}$           | $V_{CC}$                                | $V_{REF}$           | —               | $V_{CC}$                                | $V_{REF}$           | $V_{CC}$                                | V       |
| $V_{OL}$     | SD Output Low Level <sup>(2)</sup>                | —                   | 0.5                                     | —                   | 0.5                                     | —                   | —               | 0.5                                     | —                   | 0.5                                     | V       |
| $I_{OH}$     | SD Output Leakage <sup>(3)</sup>                  | —                   | 100                                     | —                   | 100                                     | —                   | —               | 100                                     | —                   | 100                                     | $\mu A$ |
| $V_{OH}$     | $D_{OUT}$ and $/D_{OUT}$ HIGH Output              | $V_{CC} - 1085$     | $V_{CC} - 880$                          | $V_{CC} - 1025$     | $V_{CC} - 880$                          | $V_{CC} - 1025$     | $V_{CC} - 955$  | $V_{CC} - 880$                          | $V_{CC} - 1025$     | $V_{CC} - 880$                          | mV      |
| $V_{OL}$     | $D_{OUT}$ and $/D_{OUT}$ LOW Output               | $V_{CC} - 1830$     | $V_{CC} - 1555$                         | $V_{CC} - 1810$     | $V_{CC} - 1620$                         | $V_{CC} - 1810$     | $V_{CC} - 1705$ | $V_{CC} - 1620$                         | $V_{CC} - 1810$     | $V_{CC} - 1620$                         | mV      |
| $V_{REF}$    | Reference Supply                                  | $V_{CC} - 1.38$     | $V_{CC} - 1.26$                         | $V_{CC} - 1.38$     | $V_{CC} - 1.26$                         | $V_{CC} - 1.38$     | $V_{CC} - 1.32$ | $V_{CC} - 1.26$                         | $V_{CC} - 1.38$     | $V_{CC} - 1.26$                         | V       |
| $I_{REF}$    | $V_{REF}$ Output Current                          | -0.8                | 0.5                                     | -0.8                | 0.5                                     | -0.8                | —               | 0.5                                     | -0.8                | 0.5                                     | mA      |
| $V_{IH}$     | EN Input HIGH Voltage                             | 2.0                 | —                                       | 2.0                 | —                                       | 2.0                 | —               | —                                       | 2.0                 | —                                       | V       |
| $V_{IL}$     | EN Input LOW Voltage                              | —                   | 0.8                                     | —                   | 0.8                                     | —                   | —               | 0.8                                     | —                   | 0.8                                     | V       |

**Notes:**

1. No output load
2.  $I_{OL} = +2mA$
3.  $V_{OH} = 5.5V$

4.  $V_{IN} = 2.7V$ 5.  $V_{IN} = V_{CC}$ 6.  $V_{IN} = 0.5V$ **AC ELECTRICAL CHARACTERISTICS**
 $V_{CC} = +5V \pm 10\%$ ,  $R_{LOAD} = 50\Omega$  to  $V_{CC} - 2V$ 

| Symbol     | Parameter                                        | $T_A = -40^\circ C$ |      | $T_A = 0^\circ C$ |      | $T_A = +25^\circ C$ |                           |      | $T_A = +85^\circ C$ |      | Unit             | Conditions                                     |
|------------|--------------------------------------------------|---------------------|------|-------------------|------|---------------------|---------------------------|------|---------------------|------|------------------|------------------------------------------------|
|            |                                                  | Min.                | Max. | Min.              | Max. | Min.                | Typ.                      | Max. | Min.                | Max. |                  |                                                |
| PSRR       | Power Supply <sup>(1)</sup> Rejection Ratio      | —                   | —    | —                 | —    | —                   | 35                        | —    | —                   | —    | dB               | Input referred, 55MHz                          |
| $V_{ID}$   | Input Voltage Range                              | 5                   | 1800 | 5                 | 1800 | 5                   | —                         | 1800 | 5                   | 1800 | mV <sub>PP</sub> |                                                |
| $V_{OD}$   | Differential Output Voltage Swing <sup>(2)</sup> | —                   | —    | —                 | —    | —                   | 700<br>300                | —    | —                   | —    | mV<br>mV         | $V_{ID} = 15mV_{PP}$<br>$V_{ID} = 5mV_{PP}$    |
| $t_{ONL}$  | SD Release Time <sup>(3)</sup> Minimum Input     | —                   | 0.5  | —                 | 0.5  | —                   | 0.2                       | 0.5  | —                   | 0.5  | $\mu s$          |                                                |
| $t_{ONH}$  | SD Release Time <sup>(4)</sup> Maximum Input     | —                   | 0.5  | —                 | 0.5  | —                   | 0.2                       | 0.5  | —                   | 0.5  | $\mu s$          |                                                |
| $t_{OFFL}$ | SD Assert Time <sup>(3)</sup>                    | —                   | 0.5  | —                 | 0.5  | —                   | 0.1                       | 0.5  | —                   | 0.5  | $\mu s$          |                                                |
| $V_{SR}$   | SD Sensitivity Range                             | 5                   | 50   | 5                 | 50   | 5                   | —                         | 50   | 5                   | 50   | mV <sub>PP</sub> | 2 <sup>23</sup> -1 pattern                     |
| HYS        | SD Hysteresis                                    | 2                   | 8    | 2                 | 8    | 2                   | 4.6                       | 8    | 2                   | 8    | dB               | 2 <sup>23</sup> -1 pattern                     |
| $t_r, t_f$ | Output Rise/Fall Time                            | —                   | 175  | —                 | 175  | —                   | 150<br>$t_{rin}, t_{fin}$ | 175  | —                   | 175  | ps               | $V_{ID} > 100mV_{PP}$<br>$V_{ID} < 100mV_{PP}$ |

**Notes:**

1. Input referred noise = RMS output noise/low frequency gain.
2. Input is a 622MHz square wave.

3. Input is a 200MHz square wave,  $t_r < 300ps$ ,  $8mV_{PP}$ .4. Input is a 200MHz square wave,  $t_r < 300ps$ ,  $1.8V_{PP}$ .

## DESIGN PROCEDURE

### Output Termination

The SY88943V outputs must be terminated with a  $50\Omega$  load to  $V_{CC} - 2V$  (or Thevenin equivalent).

### Layout and PCB Design

Since the SY88943V is a high-frequency component, performance can be largely determined by the board layout and design. A common problem with high-gain amplifiers is the feedback from the large swing outputs to the input via the power supply.

The SY88943V ground pin should be connected to the circuit board ground. Use multiple PCB vias close to the part to connect to ground. Avoid long, inductive runs which can degrade performance.

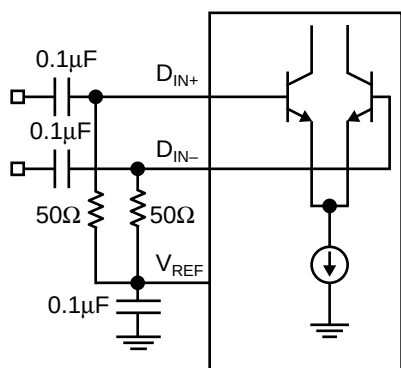


Figure 2. Differential Input Configuration

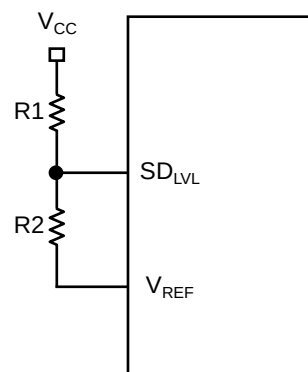


Figure 3.  $SD_{LVL}$  Circuit

#### Notes:

$$SD_{LVL} = V_{CC} - 1.32V + \frac{R2 \times 1.32V}{R1 + R2}$$

$$R1 + R2 \geq 2.6k\Omega$$

PERFORMANCE CURVE

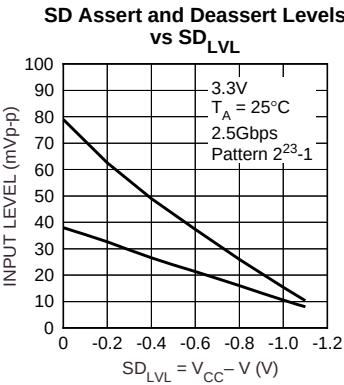


Figure 4.

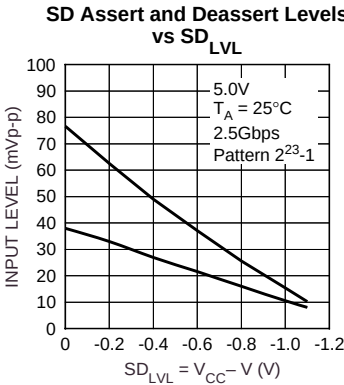


Figure 5.

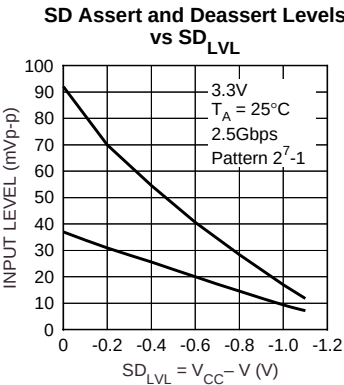


Figure 6.

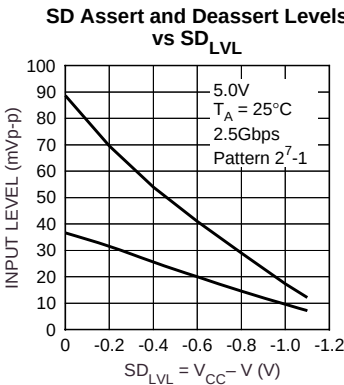
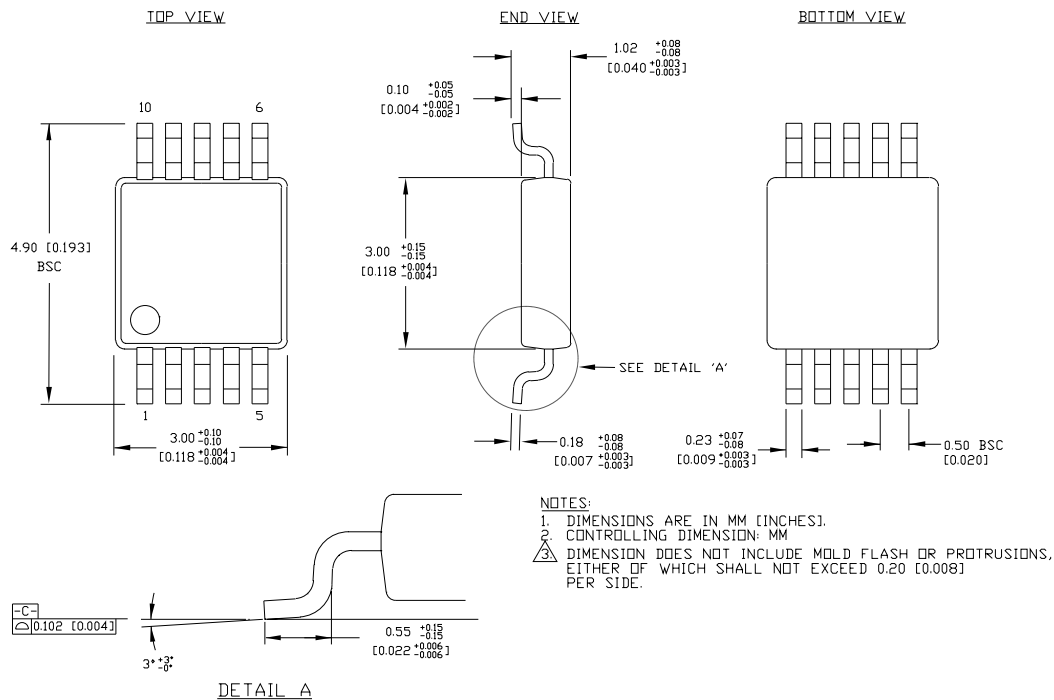


Figure 7.

**10 LEAD MSOP (K10-1)**

Rev. 00

**MICREL, INC. 2180 FORTUNE DRIVE SAN JOSE, CA 95131 USA**TEL + 1 (408) 944-0800 FAX + 1 (408) 474-1000 WEB <http://www.micrel.com>

The information furnished by Micrel in this datasheet is believed to be accurate and reliable. However, no responsibility is assumed by Micrel for its use. Micrel reserves the right to change circuitry and specifications at any time without notification to the customer.

Micrel Products are not designed or authorized for use as components in life support appliances, devices or systems where malfunction of a product can reasonably be expected to result in personal injury. Life support devices or systems are devices or systems that (a) are intended for surgical implant into the body or (b) support or sustain life, and whose failure to perform can be reasonably expected to result in a significant injury to the user. A Purchaser's use or sale of Micrel Products for use in life support appliances, devices or systems is at Purchaser's own risk and Purchaser agrees to fully indemnify Micrel for any damages resulting from such use or sale.

© 2005 Micrel, Incorporated.