



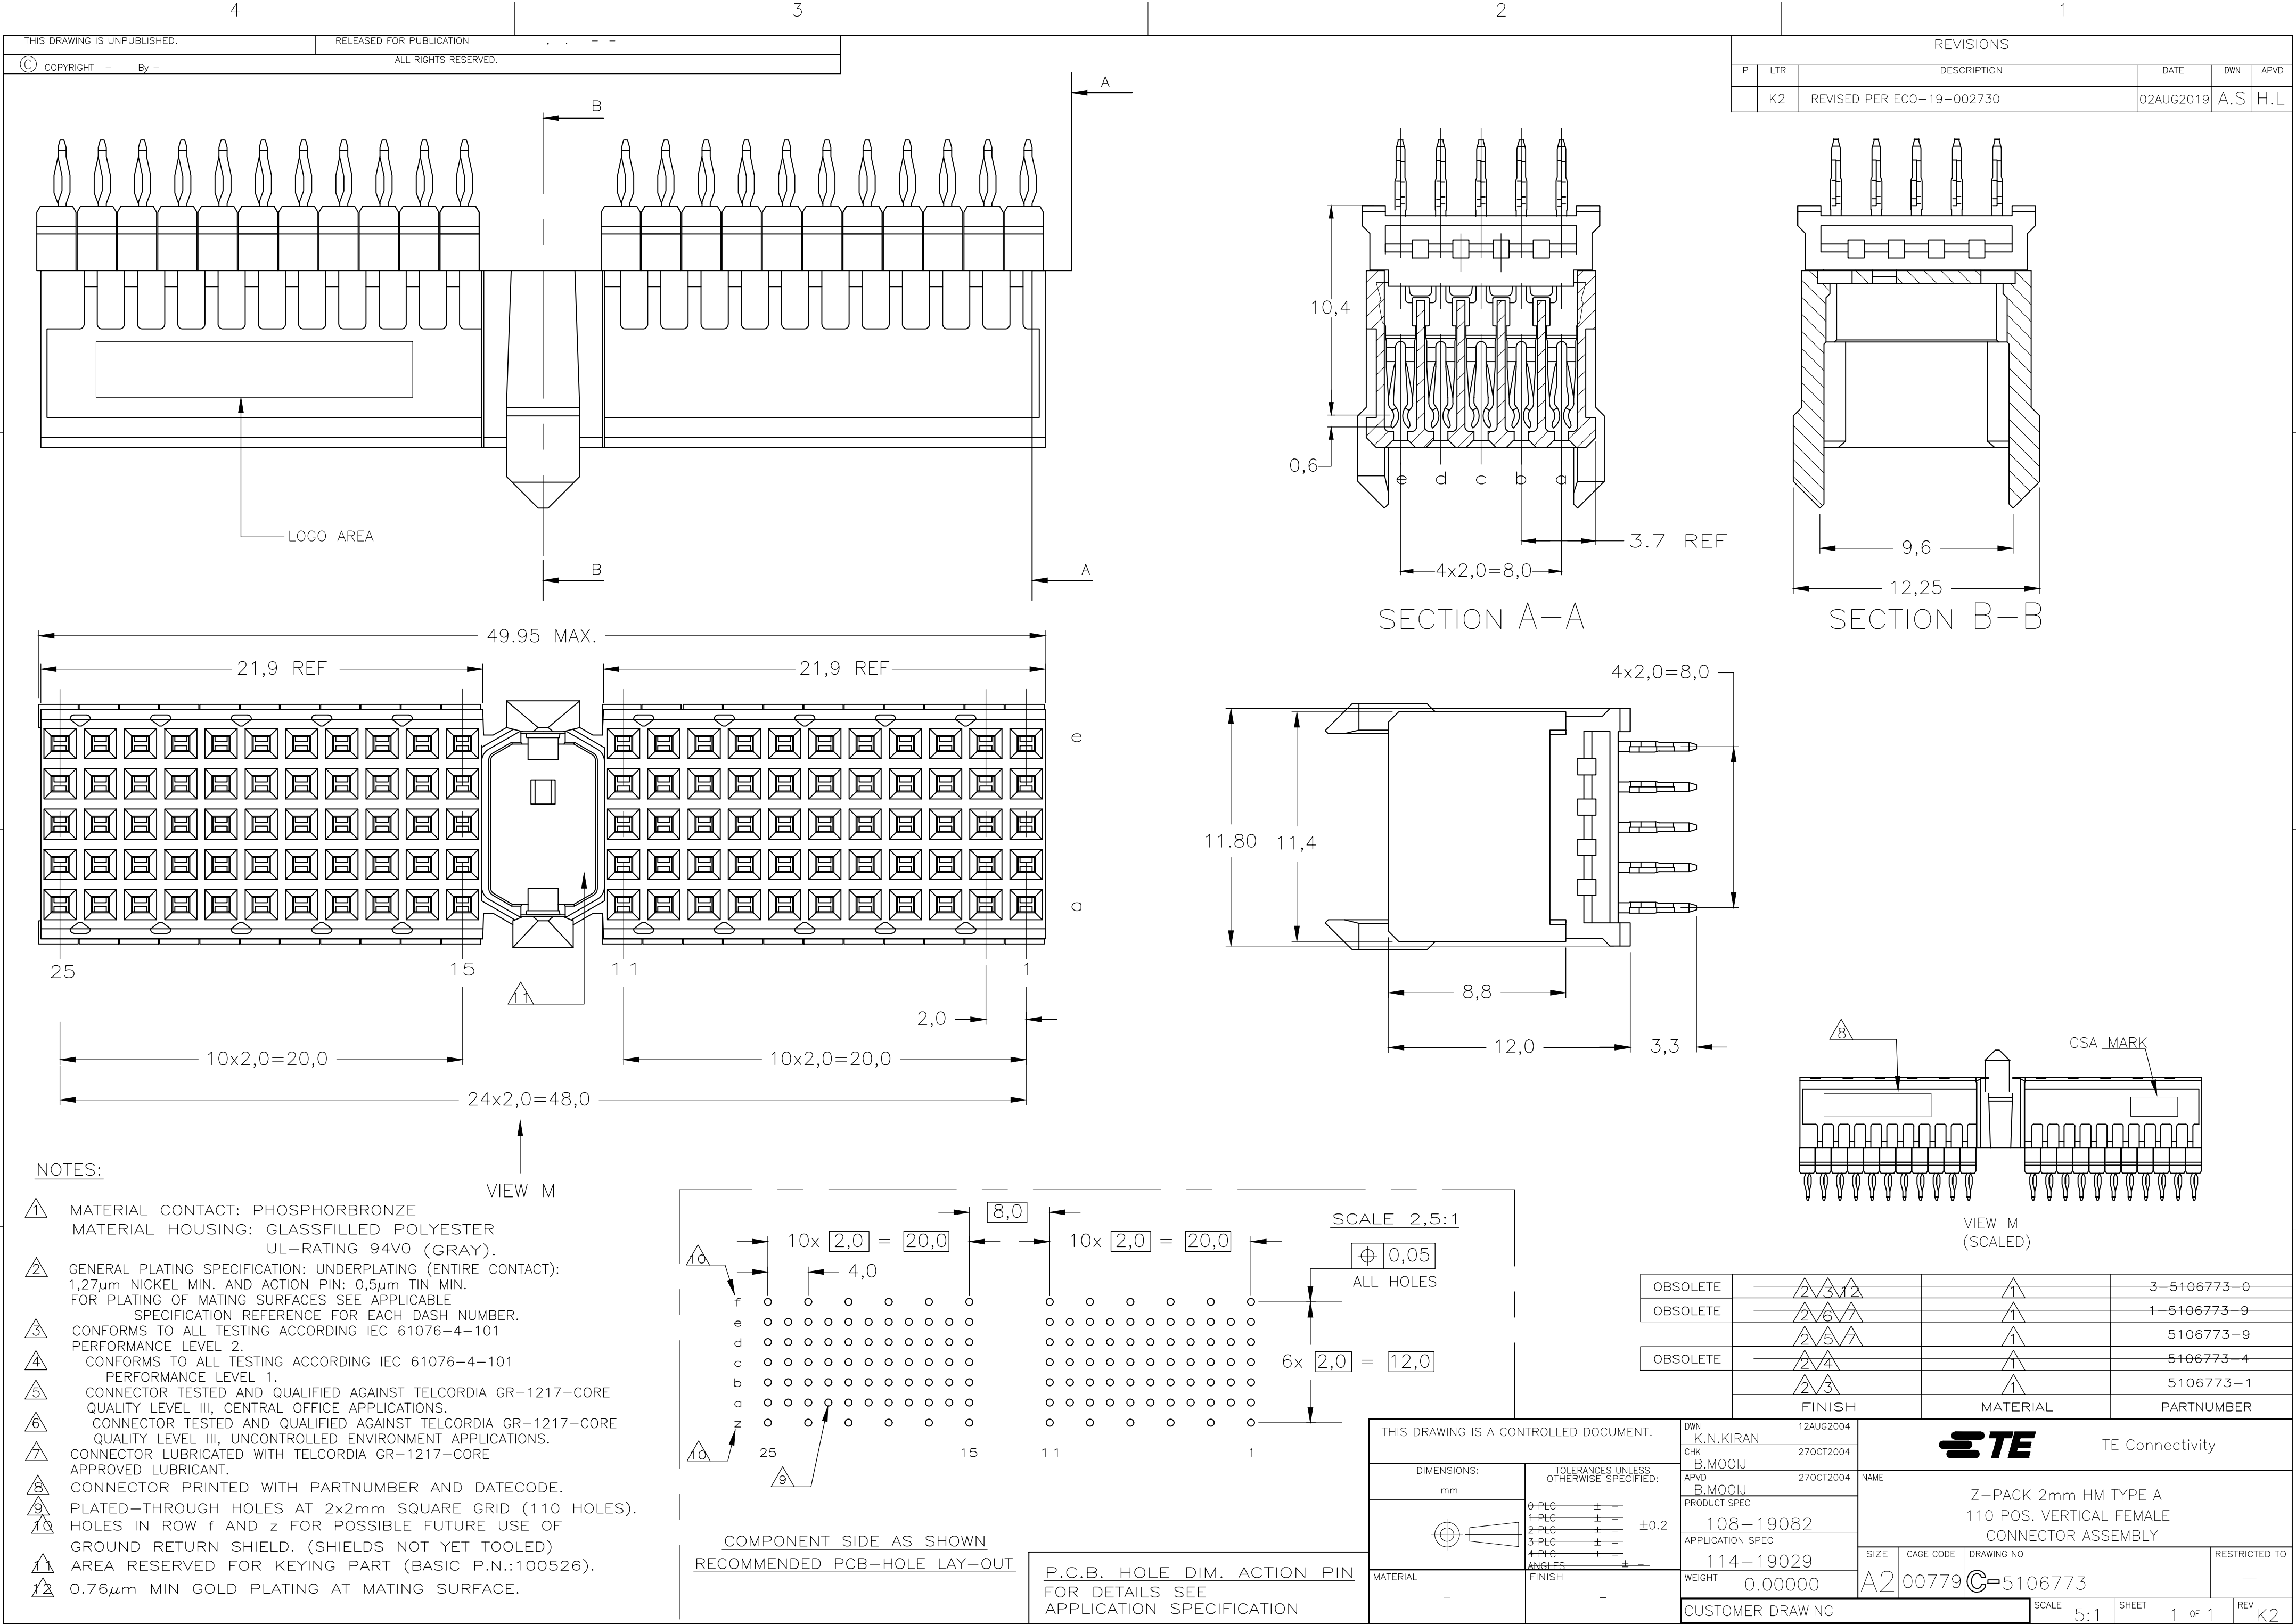

NOTES:

- 1 MATERIAL CONTACT: PHOSPHORBRONZE
MATERIAL HOUSING: GLASSFILLED POLYESTER
UL-RATING 94V0 (GRAY).
- 2 GENERAL PLATING SPECIFICATION: UNDERPLATING (ENTIRE CONTACT):
1,27µm NICKEL MIN. AND ACTION PIN: 0,5µm TIN MIN.
FOR PLATING OF MATING SURFACES SEE APPLICABLE
SPECIFICATION REFERENCE FOR EACH DASH NUMBER.
- 3 CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101
PERFORMANCE LEVEL 2.
- 4 CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101
PERFORMANCE LEVEL 1.
- 5 CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE
QUALITY LEVEL III, CENTRAL OFFICE APPLICATIONS.
- 6 CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE
QUALITY LEVEL III, UNCONTROLLED ENVIRONMENT APPLICATIONS.
- 7 CONNECTOR LUBRICATED WITH TELCORDIA GR-1217-CORE
APPROVED LUBRICANT.
- 8 CONNECTOR PRINTED WITH PARTNUMBER AND DATECODE.
- 9 PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID (110 HOLES).
- 10 HOLES IN ROW f AND z FOR POSSIBLE FUTURE USE OF
GROUND RETURN SHIELD. (SHIELDS NOT YET TOOLED)
- 11 AREA RESERVED FOR KEYING PART (BASIC P.N.:100526).
- 12 0.76µm MIN GOLD PLATING AT MATING SURFACE.

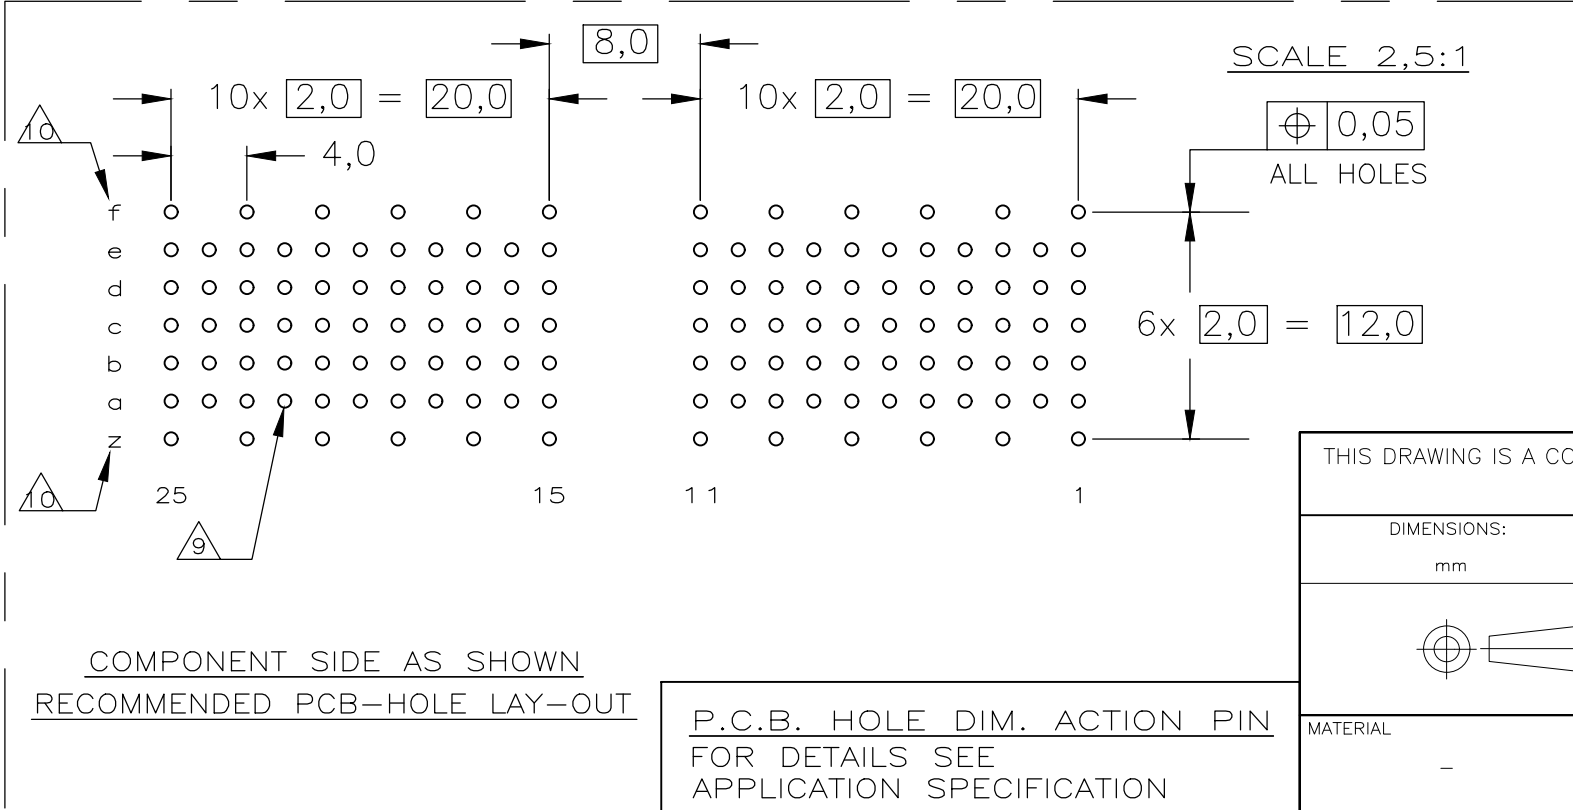

OBSOLETE	3			3-5106773-0
OBSOLETE	6			1-5106773-9
	3			5106773-9
OBSOLETE	4			5106773-4
	3			5106773-1
FINISH		MATERIAL		PARTNUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	12AUG2004	TE TE Connectivity	
DIMENSIONS:		CHK	27OCT2004		
mm		APVD	27OCT2004	NAME	
		PRODUCT SPEC			
		APPLICATION SPEC		Z-PACK 2mm HM TYPE A 110 POS. VERTICAL FEMALE CONNECTOR ASSEMBLY	
		WEIGHT			
		CUSTOMER DRAWING			

9 PLC	±	±	±0.2
1 PLC	±	±	
2 PLC	±	±	
3 PLC	±	±	
4 PLC	±	±	±
ANGLES	±	±	
FINISH	±	±	

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C=5106773	-
SCALE	5:1	SHEET	1 of 1
REV	K2		