

ORDERING INFORMATION		
Temp Range	Package	Part Number
-55 to 125°C	14-Pin CerDIP	DG200AAK
		DG200AAK/883, JM38510/12301BCA, 5962-9562901QCA
	10-Pin Metal Can	DG200AAA
		DG200AAA/883, JM38510/12301BIC
	14-Pin Sidebraz	JM38510/12301BCC

ABSOLUTE MAXIMUM RATINGS

$V+$ to $V-$ 44 V
 GND to $V-$ 25 V
 Digital Inputs^a, V_S , V_D ($V-$) -2 V to ($V+$) +2 V or 30 mA, whichever occurs first
 Current (Any Terminal) Continuous 30 mA
 Current S or D (Pulsed at 1 ms, 10% Duty Cycle Max) 100 mA
 Storage Temperature -65 to 150°C

Power Dissipation (Package)^b
 10-Pin Metal Can^c 450 mW
 14-Pin CerDIP^d 825 mW

Notes:

- Signals on S_X , D_X , or IN_X exceeding $V+$ or $V-$ will be clamped by internal diodes. Limit forward diode current to maximum current ratings.
- All leads welded or soldered to PC Board.
- Derate 6 mW/°C above 75°C
- Derate 11 mW/°C above 75°C

SCHEMATIC DIAGRAM (TYPICAL CHANNEL)

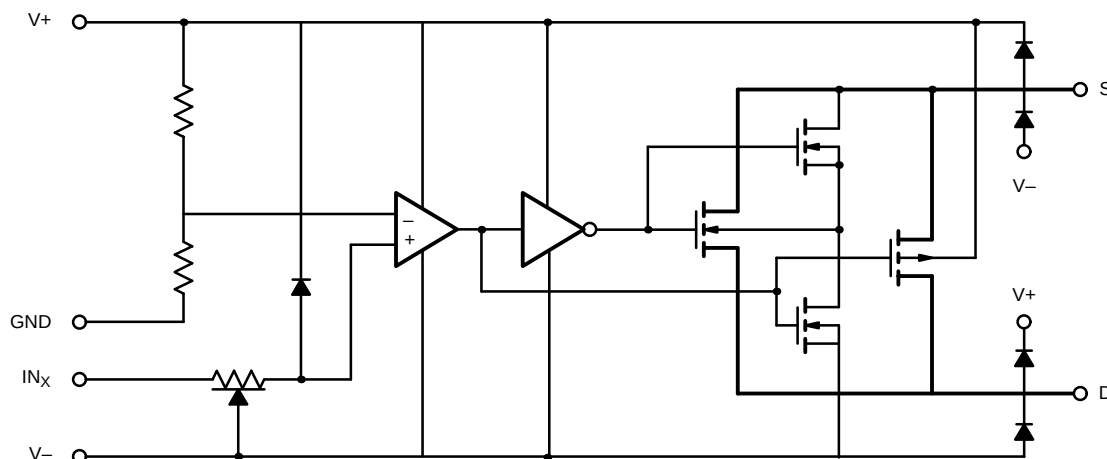


FIGURE 1.







SPECIFICATIONS ^a							
Parameter	Symbol	Test Conditions Unless Otherwise Specified V ⁺ = 15 V, V ⁻ = -15 V V _{IN} = 2.4 V, 0.8 V ^f	Temp ^b	Limits -55 to 125°C			Unit
				Min ^c	Typ ^d	Max ^c	
Analog Switch							
Analog Signal Range ^e	V _{ANALOG}		Full	-15		15	V
Drain-Source On-Resistance	r _{DS(on)}	V _D = ±10 V, I _S = -1 mA	Room Full		45	70 100	Ω
Source Off Leakage Current	I _{S(off)}	V _S = ±14 V, V _D = ∓14 V	Room Full	-2 -100	±0.01	2 100	nA
Drain Off Leakage Current	I _{D(off)}	V _D = ±14 V, V _S = ∓14 V	Room Full	-2 -100	±0.01	2 100	
Channel On Leakage Current ^f	I _{D(on)}	V _S = V _D = ±14 V	Room Full	-2 -200	±0.1	2 200	
Digital Control							
Input Current with Input Voltage High	I _{INH}	V _{IN} = 2.4 V	Room Full	-0.5 -1	0.0009		μA
		V _{IN} = 15 V	Room Full		0.005	0.5 1	
Input Current with Input Voltage Low	I _{INL}	V _{IN} = 0 V	Room Full	-0.5 -1	-0.0015		
Dynamic Characteristics							
Turn-On Time	t _{ON}	See Switching Time Test Circuit	Room		440	1000	ns
Turn-Off Time	t _{OFF}		Room		340	425	
Charge Injection	Q	C _L = 1000 pF, V _g = 0 V R _g = 0 Ω	Room		-10		pC
Source-Off Capacitance	C _{S(off)}	f = 140 kHz V _{IN} = 5 V	V _S = 0 V	Room		9	pF
Drain-Off Capacitance	C _{D(off)}		V _D = 0 V	Room		9	
Channel-On Capacitance	C _{D(on)} + C _{S(on)}	V _D = V _S = 0 V, V _{IN} = 0 V		Room		25	
Off Isolation	OIRR	V _{IN} = 5 V, R _L = 75 Ω V _S = 2 V, f = 1 MHz	Room		75		dB
Crosstalk (Channel-to-Channel)	X _{TALK}		Room		90		
Power Supplies							
Positive Supply Current	I ⁺	Both Channels On or Off V _{IN} = 0 V and 2.4 V	Room		0.8	2	mA
Negative Supply Current	I ⁻		Room	-1	-0.23		

Notes:





- Refer to PROCESS OPTION FLOWCHART.
- Room = 25°C, Full = as determined by the operating temperature suffix.
- The algebraic convention whereby the most negative value is a minimum and the most positive a maximum, is used in this data sheet.
- Typical values are for DESIGN AID ONLY, not guaranteed nor subject to production testing.
- Guaranteed by design, not subject to production test.
- V_{IN} = input voltage to perform proper function.

TYPICAL CHARACTERISTICS (25°C UNLESS NOTED)

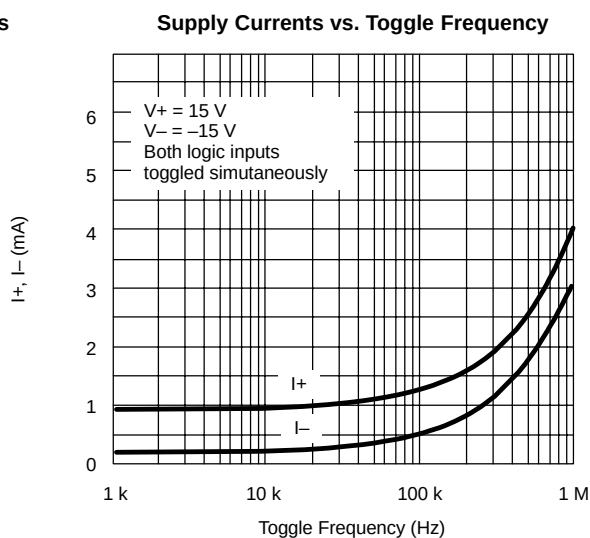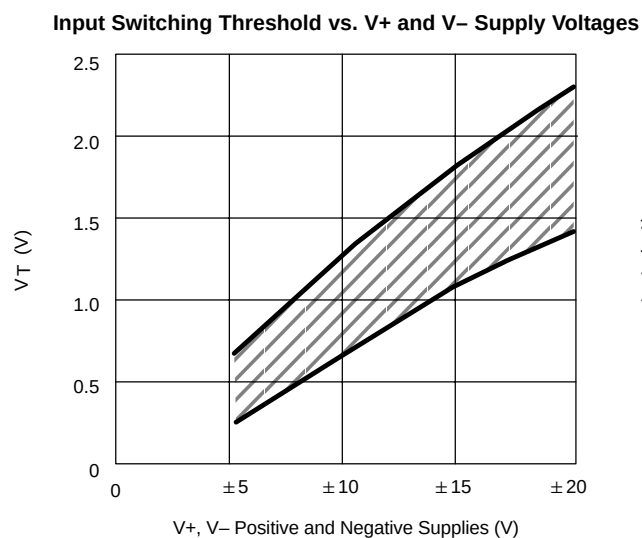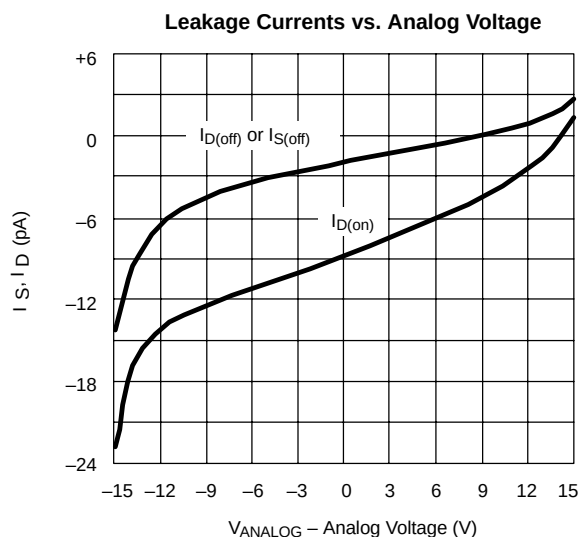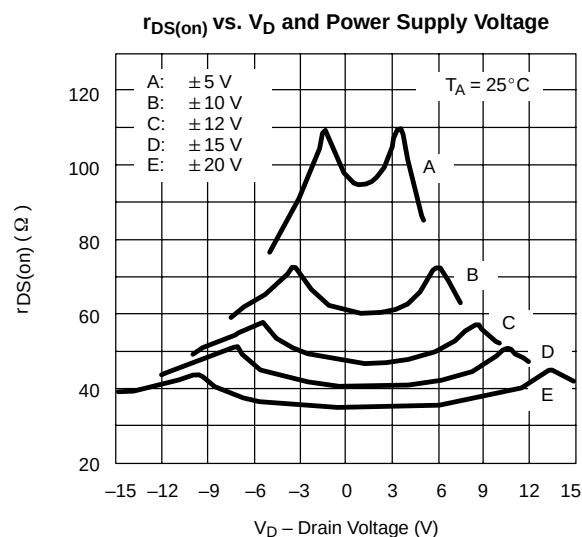

TEST CIRCUITS

V_O is the steady state output with switch on. Feedthrough via gate capacitance may result in spikes at leading and trailing edge of output waveform.

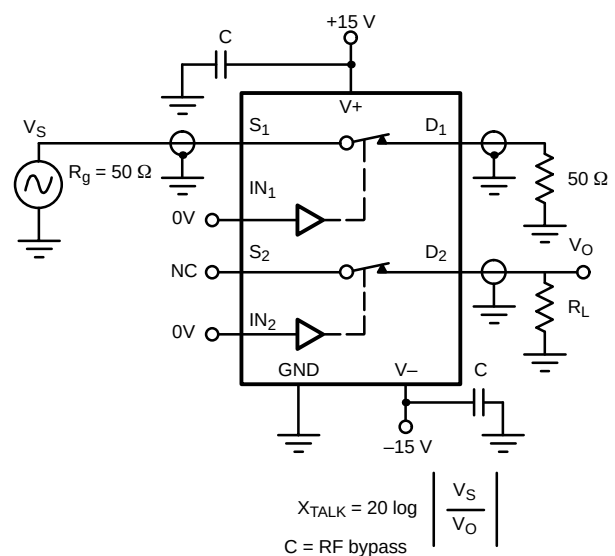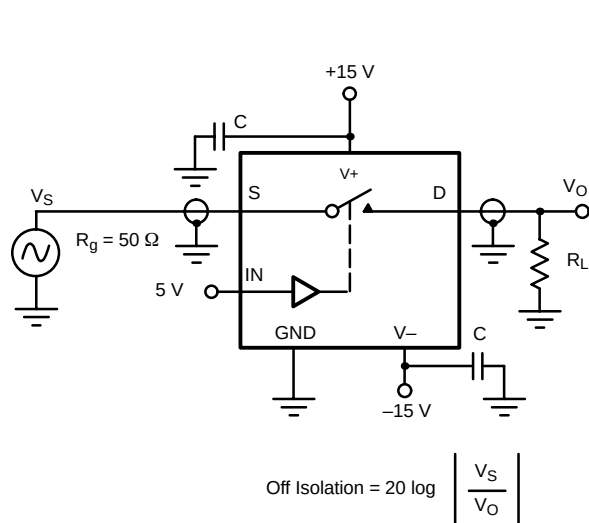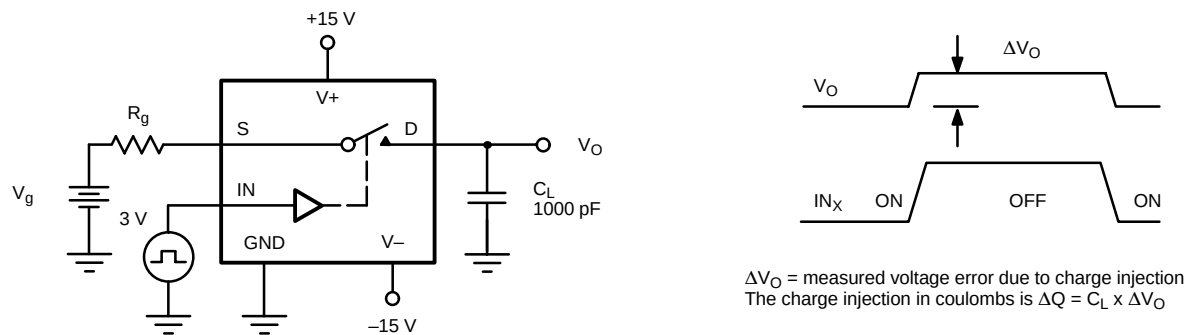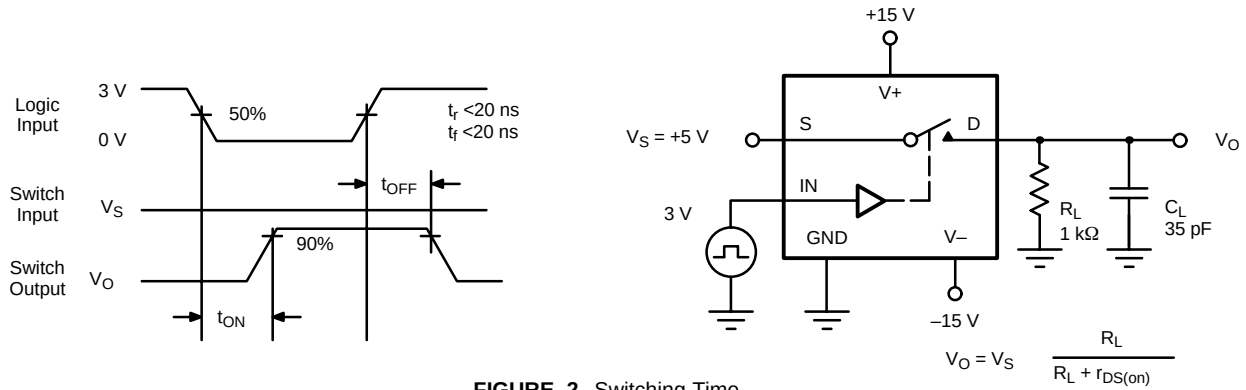



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.