
AURIXTM – TC275T/TC277T Safety Excellence

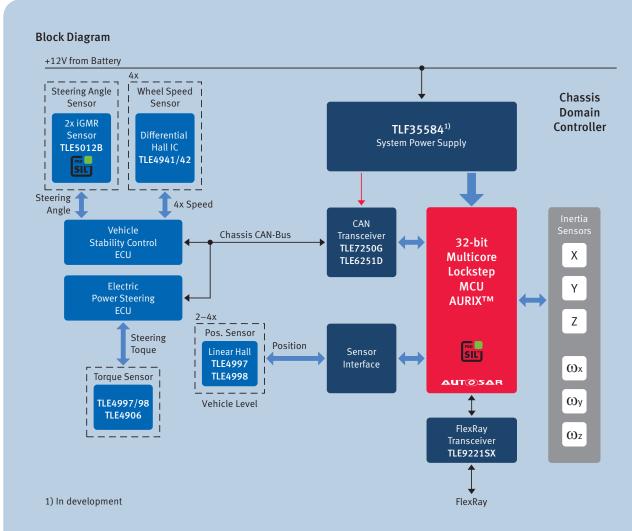

Chassis Domain Controller

Product Summary

Туре	eFlash	Data Flash	Frequency	SRAM	Package	Temp. Range
SAK-TC277T-64F200S	4MB	64KB*	200MHz	472KB	PG-LFBGA-292	-40+125°C **
SAK-TC275T-64F200W	4MB	64KB*	200MHz	472KB	PG-LQFP-176	-40+125°C **

^{*}EEPROM emulation (up to 500k w/e cycles)

Published by Infineon Technologies AG 85579 Neubiberg, Germany

© 2012 Infineon Technologies AG. All Rights Reserved.

Visit us: www.infineon.com

Order Number: B158-H9747-X-X-7600

Date: 09 / 2012

ATTENTION PLEASE!

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics ("Beschaffenheitsgarantie"). With respect to any examples or hints given herein, any typical values stated herein and/ or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation warranties of non-infringement of intellectual property rights of any third party.

INFORMATION

For further information on technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies Office (www.infineon.com).

WARNINGS

Due to technical requirements components may contain dangerous substances. For information on the types in question please contact your nearest Infineon Technologies Office. Infineon Technologies Components may only be used in life-support devices or systems with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system, or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body, or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.

^{**}Hot package options with Ta > 125°C are available on request