
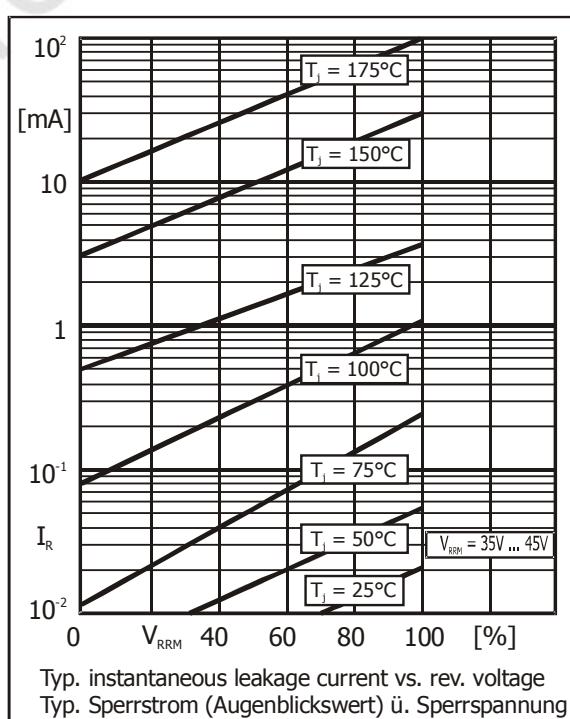
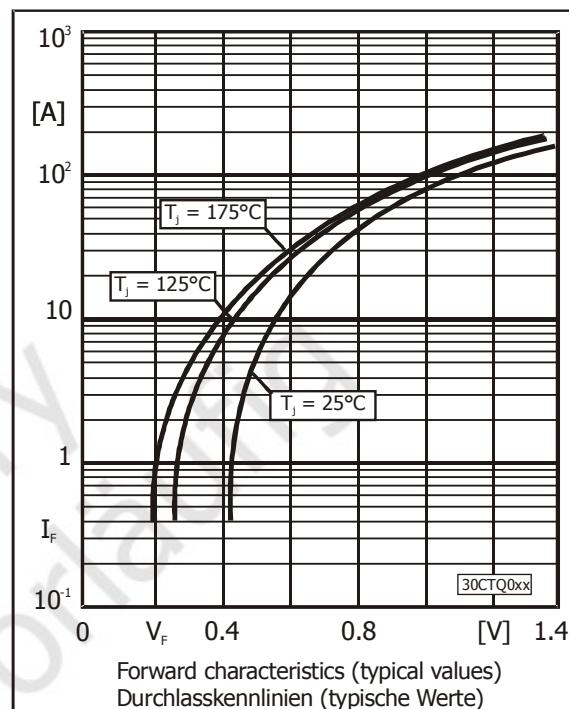


**Characteristics**

		<b>Kennwerte</b>
Leakage current Sperrstrom	$T_j = 25^\circ\text{C}$ $V_R = V_{RRM}$ $T_j = 125^\circ\text{C}$ $V_R = V_{RRM}$	$I_R$  $< 50 \mu\text{A}$ typ. 15 mA
Thermal resistance junction to case Wärmewiderstand Sperrsicht – Gehäuse		$R_{thC}$  $< 3.25 \text{ K/W}^1)$
Maximum Junction Capacitance Maximale Sperrsichtkapazität		$C_j$  900 pF <sup>1)</sup>

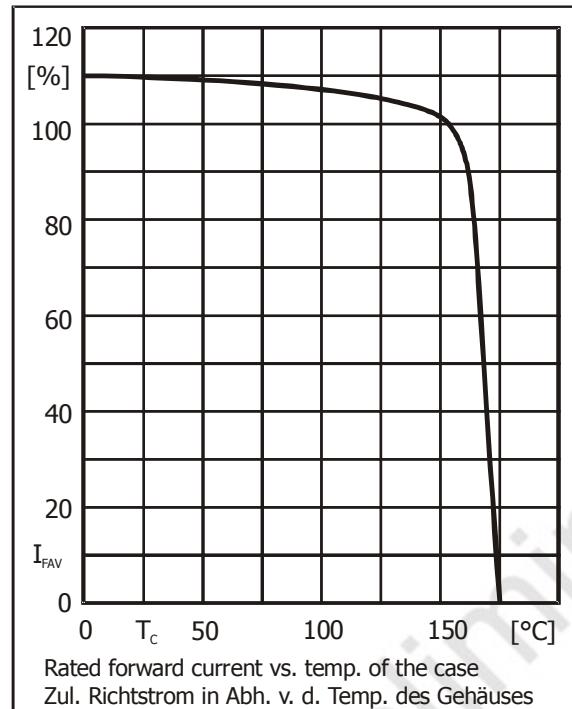

1 Per diode – Pro Diode