

32.768kHz SMD LOW PROFILE CRYSTAL

ABS07




RoHS/RoHS II




3.2 x 1.5 x 0.9 mm

FREQUENCY VS. TEMPERATURE CHARACTERISTICS

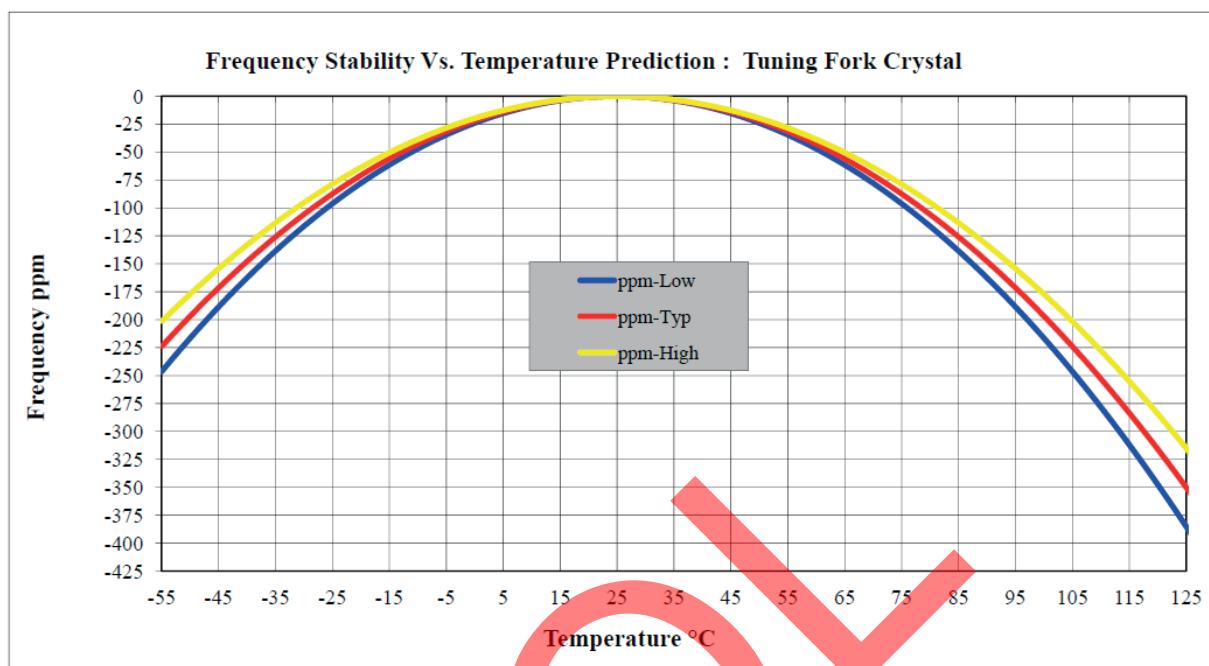

OUTLINE DIMENSIONS:

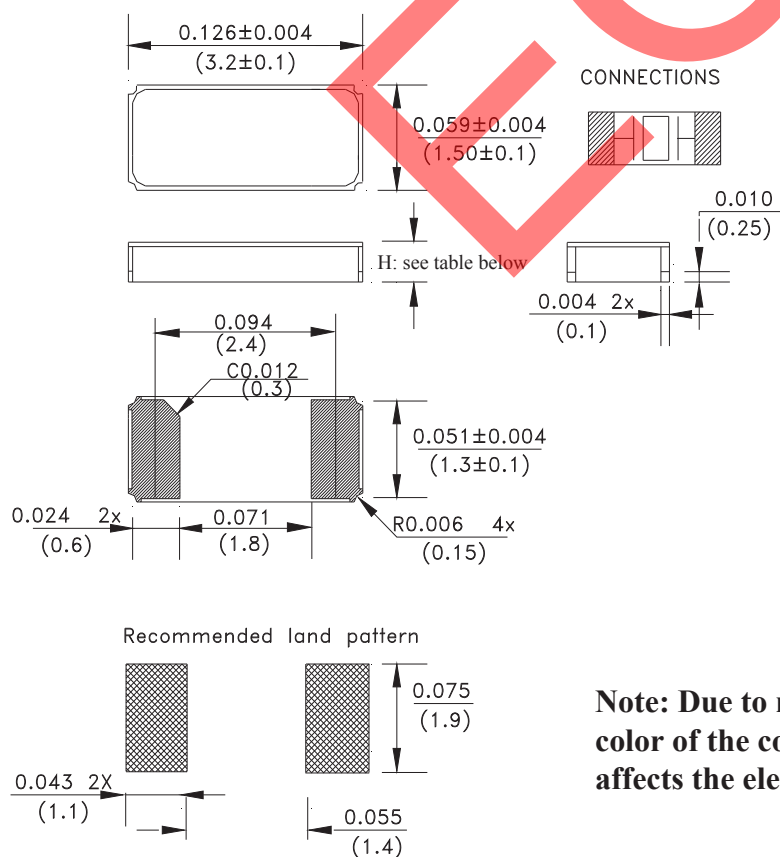

Part Number	Height (H)
ABS07	0.9 mm max.
ABS071	0.65 mm max.

Note: Due to material availability, the outline and finish color of the component may vary. This variation in no way affects the electrical performance of the product.

Dimensions: inches (mm)

ABRACON IS
ISO9001:2008
CERTIFIED



ABRACON
The Power of Linking Together

2 Faraday, Suite# B | Irvine | CA 92618 **Revised: 08.19.15**
Ph. 949.546.8000 | Fax. 949.546.8001

Visit www.abracon.com for Terms and Conditions of Sale

32.768kHz SMD LOW PROFILE CRYSTAL

ABS07




RoHS/RoHS II

ABS07


3.2 x 1.5 x 0.9 mm

REFLOW PROFILE

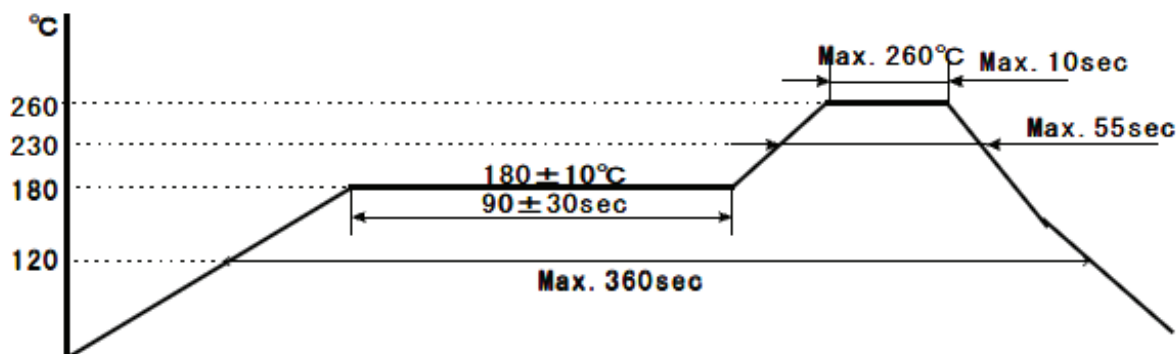

TAPE & REEL

T=Tape and reel (3,000pcs/reel)

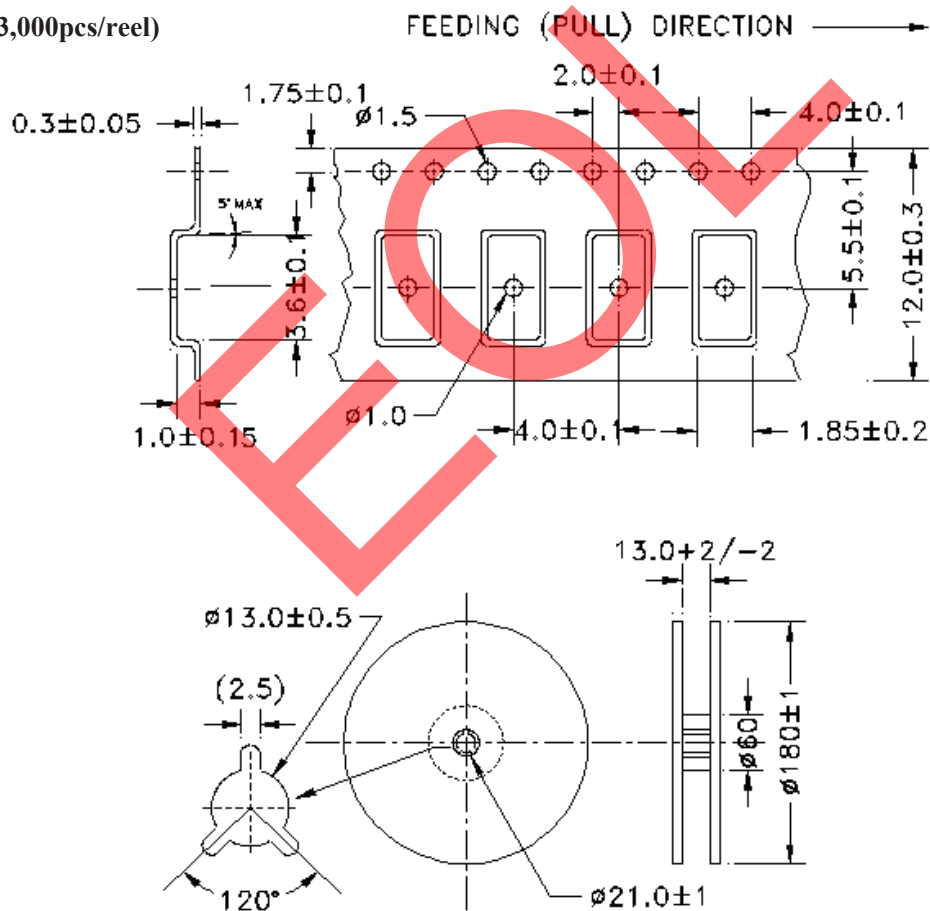

Dimensions: mm

ATTENTION: Abracon Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.

ABRACON IS
ISO9001:2008
CERTIFIED



ABRACON
LLC

2 Faraday, Suite# B | Irvine | CA 92618 **Revised: 08.19.15**
Ph. 949.546.8000 | Fax. 949.546.8001

Visit www.abracon.com for Terms and Conditions of Sale