



Typical Applications Circuit

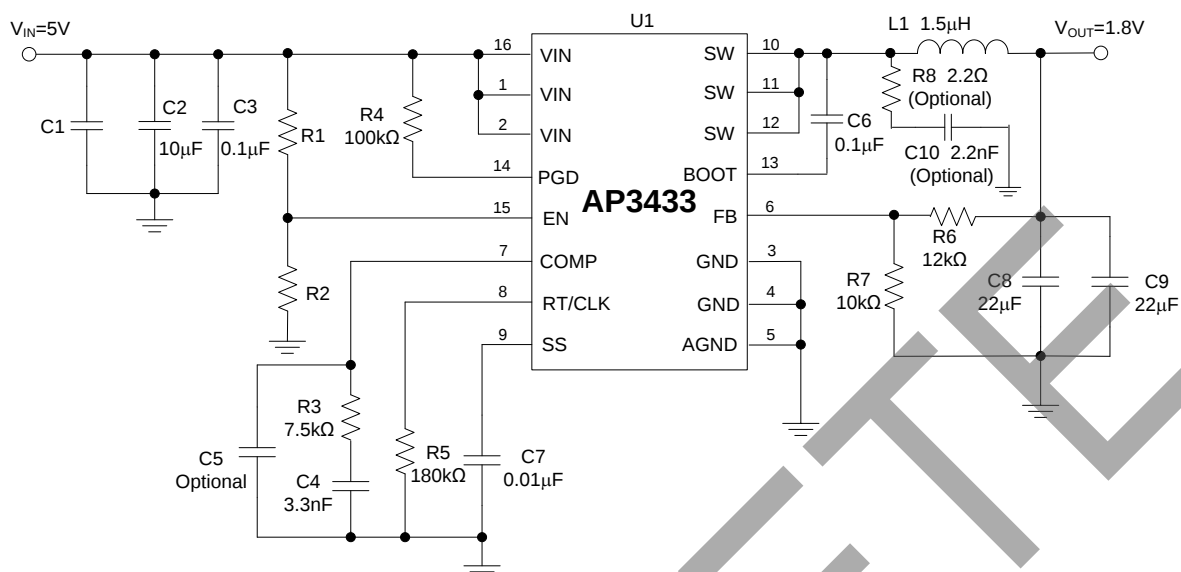

Pin Descriptions

Pin Number	Pin Name	Function
1,2,16	VIN	Supply input pin. A capacitor should be connected between the VIN and GND pin to keep the DC input voltage constant
3,4	GND	Power ground. This pin should be electrically connected to the power pad under the IC
5	AGND	Analog ground. This pin should be electrically connected to GND close to the device
6	FB	Feedback pin. Inverting node of the transconductance error amplifier
7	COMP	Compensation pin. This pin is the output of the transconductance error amplifier and the input to the current comparator. Connect external compensation elements to this pin to stabilize the control loop
8	RT/CLK	Resistor timing or external clock input pin
9	SS	Soft-start pin. An external capacitor connected to this pin sets the output voltage rise time. This pin can also be used for tracking
10,11,12	SW	Internal power switch output pin. This pin is connected to the inductor and bootstrap capacitor
13	BOOT	Bootstrap pin. A bootstrap capacitor is connected between the BOOT pin and SW pin. The voltage across the bootstrap capacitor drives the internal high-side power MOSFET
14	PGD	Power good indicator output. Asserts low if output voltage is low due to thermal shutdown, over-current, over/under-voltage or EN shut down
15	EN	Enable pin, internal pull-up current source. Pull below 1.2V to disable. Float to enable. Can be used to set the on/off threshold (adjust UVLO) with two additional resistors

Functional Block Diagram

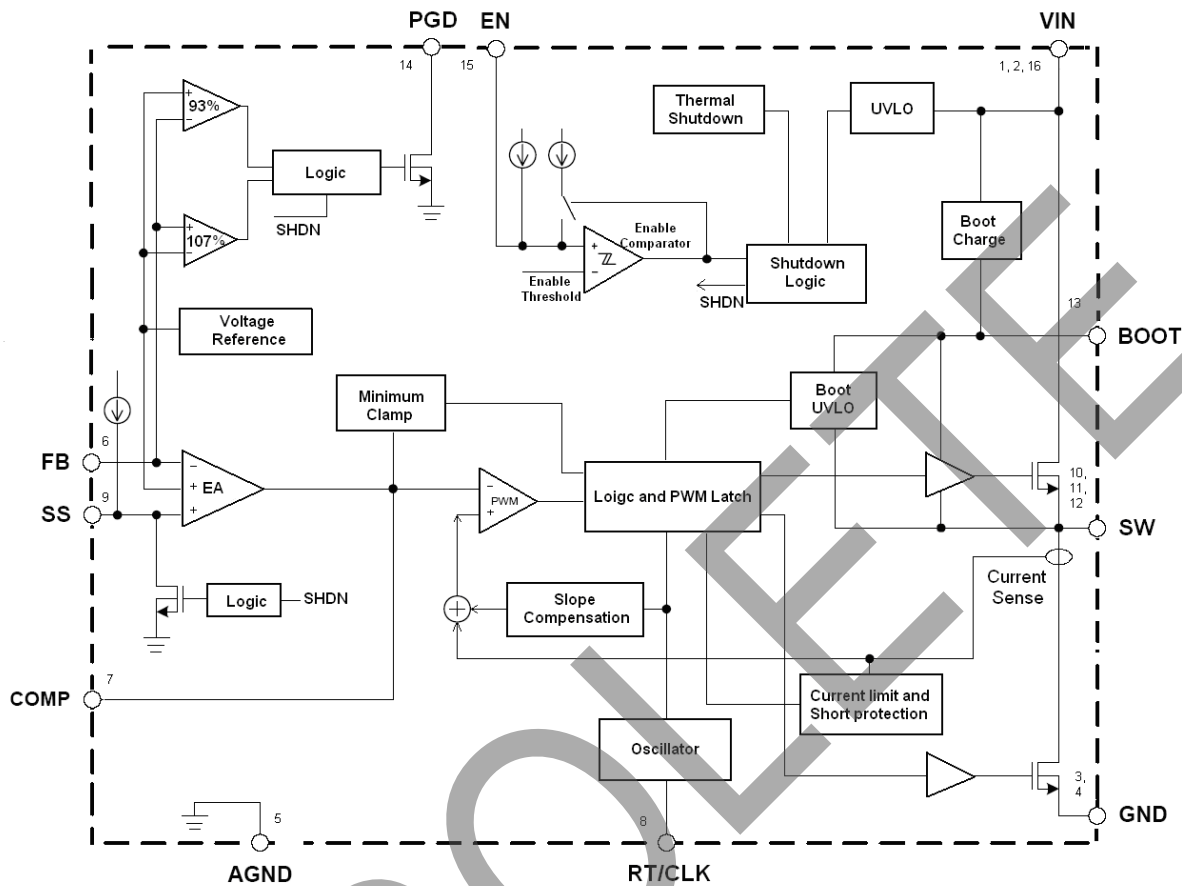

OBSOLETE – PART DISCONTINUED

Absolute Maximum Ratings (Note 1)

Symbol	Parameter	Value	Unit
V_{IN}	VIN Pin Voltage	-0.3 to 6.5	V
V_{EN}	EN Pin Voltage	-0.3 to 6.5	V
V_{SW}	SW Pin Voltage	-0.3 to $V_{IN}+0.3$	V
V_{FB}	FB Pin Voltage	-0.3 to 6.5	V
V_{COMP}	COMP Pin Voltage	-0.3 to 6.5	V
V_{PGD}	PGD Pin Voltage	-0.3 to 6.5	V
$V_{RT/CLK}$	RT/CLK Pin Voltage	-0.3 to 6.5	V
V_{SS}	SS Pin Voltage	-0.3 to 6.5	V
θ_{JA}	Thermal Resistance (Junction to Ambient)	70	°C/W
$\theta_{JC (BOTTOM)}$	Thermal Resistance (Junction to Case)	5	°C/W
T_J	Operating Junction Temperature	-40 to +125	°C
T_{STG}	Storage Temperature	-65 to +150	°C
T_{LEAD}	Lead Temperature (Soldering, 10sec)	+260	°C
—	ESD (Machine Model)	200	V
—	ESD (Human Body Model)	2000	V

Note 1: Stresses greater than those listed under “Absolute Maximum Ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under “Recommended Operating Conditions” is not implied. Exposure to “Absolute Maximum Ratings” for extended periods may affect device reliability.

Recommended Operating Conditions

Symbol	Parameter	Min	Max	Unit
V_{IN}	Input Voltage	2.95	5.5	V
$I_{OUT(MAX)}$	Maximum Output Current	3	—	A
T_A	Operating Ambient Temperature	-40	+85	°C

Electrical Characteristics ($V_{IN}=2.95$ to $5.5V$, $T_A=25^{\circ}C$, unless otherwise specified. Specifications with boldface type apply over full operating temperature range from -40 to $+85^{\circ}C$.)


Symbol	Parameters	Conditions	Min	Typ	Max	Unit
SUPPLY VOLTAGE (VIN PIN)						
V _{IN}	Input Voltage	—	2.95	—	5.5	V
I _Q	Quiescent Current	V _{FB} =0.9V, V _{IN} =5V, T _A =25°C, R _T =400kΩ	—	360	575	μA
I _{SHDN}	Shutdown Supply Current	V _{EN} =0V, T _A =25°C 2.95V≤V _{IN} ≤5.5V	—	2	5	μA
ENABLE AND UVLO (EN PIN)						
V _{EN_H}	Enable Threshold	Rising	1.16	1.25	1.37	V
V _{EN_L}		Falling	—	1.18	—	V
V _{UVLO}	Internal Under Voltage Lockout Threshold	—	—	2.6	2.8	V
V _{HYS}	Internal Under Voltage Hysteresis	—	—	150	—	mV
VOLTAGE REFERENCE (FB PIN)						
V _{REF}	Voltage Reference	2.95V≤V _{IN} ≤5.5V	0.802	0.827	0.852	V
MOSFET						
R _{ON_H}	High Side Switch On-resistance	V _{BOOT-SW} =5V	—	45	81	mΩ
		V _{BOOT-SW} =2.95V	—	64	110	mΩ
R _{ON_L}	Low Side Switch On-resistance	V _{IN} =5V	—	42	81	mΩ
		V _{IN} =2.95V	—	59	110	mΩ
CURRENT LIMIT						
I _{LIMIT}	Current Limit Threshold	—	4.2	6.6	—	A
THERMAL SHUTDOWN						
T _{TSD}	Thermal Shutdown	—	—	+140	—	°C
—	Hysteresis	—	—	+20	—	°C

Electrical Characteristics (Cont. $V_{IN}=2.95$ to $5.5V$, $T_A=25^{\circ}C$, unless otherwise specified. Specifications with boldface type apply over full operating temperature range from -40 to $+85^{\circ}C$.)


Symbol	Parameters	Conditions	Min	Typ	Max	Unit
TIMING RESISTOR AND EXTERNAL CLOCK (RT/CLK PIN)						
–	Switching Frequency Range (RT Mode)	–	300	–	2000	kHz
–	Switching Frequency Range (CLK Mode)	–	300	–	2000	kHz
f_S	Switching Frequency	$R_T=400k\Omega$	400	500	600	kHz
–	Minimum CLK Pulse Width	–	75	–	–	ns
–	RT/CLK Voltage	$R_T=400k\Omega$	–	0.5	–	V
–	RT/CLK High Threshold	–	–	1.6	2.2	V
–	RT/CLK Low Threshold	–	0.4	0.6	–	V
BOOT (BOOT PIN)						
R_{BOOT}	BOOT Charge Resistor	$V_{IN}=5V$	–	16	–	Ω
–	BOOT-SW UVLO	$V_{IN}=2.95V$	–	2.2	–	V
SOFT START (SS PIN)						
I_{SS}	Charge Current	$V_{SS}=0.4$	–	2.2	–	μA
V_{SS}	SS to Reference Crossover	98% Nominal	–	1.1	–	V
POWER GOOD (PGD PIN)						
$V_{FB TH}$	Feedback Threshold	V_{FB} Falling (Fault)	–	91	–	%VREF
		V_{FB} Rising (Good)	–	93	–	
		V_{FB} Rising (Fault)	–	107	–	
		V_{FB} Falling (Good)	–	105	–	

Performance Characteristics


Supply Current vs. Input Voltage

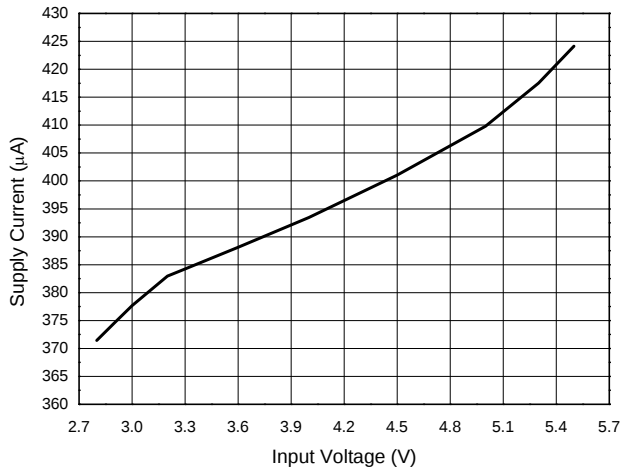


Supply Current vs. Temperature

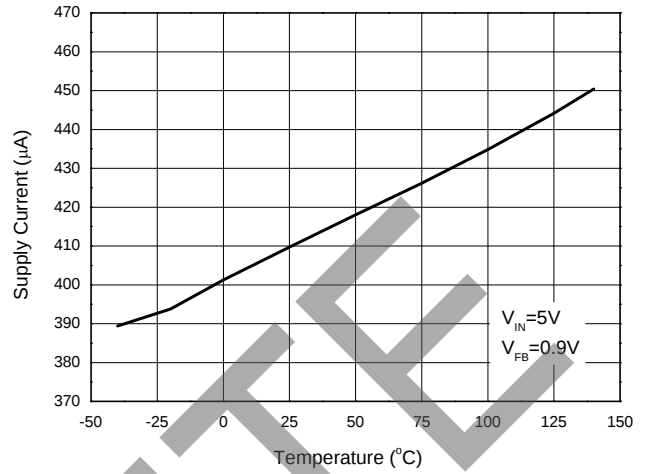


Efficiency vs. Output Current

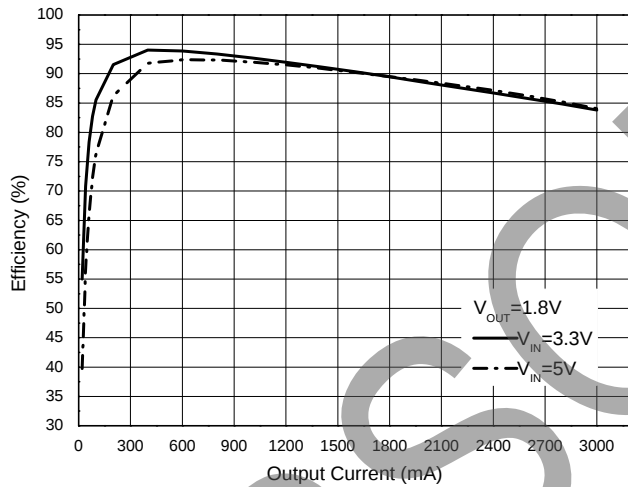


UVLO Threshold vs. Temperature

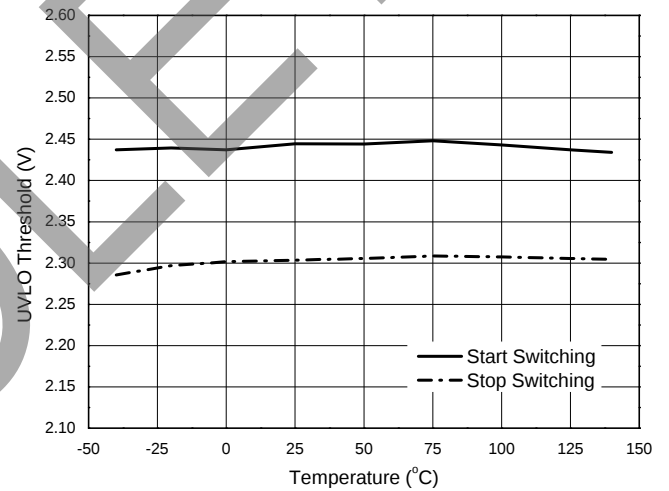

Switching Frequency vs. Temperature

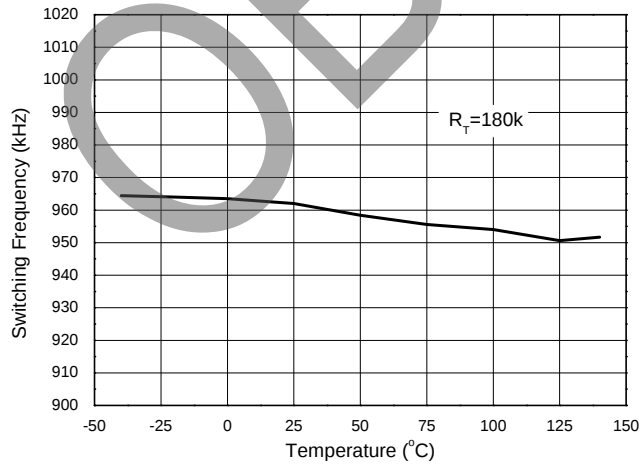


Reference Voltage vs. Temperature

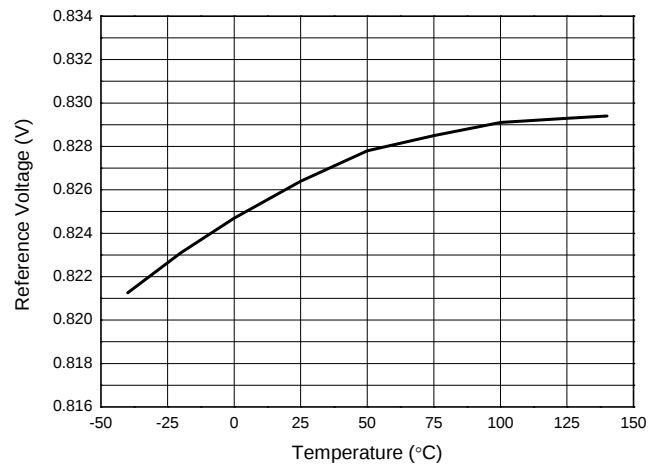


Performance Characteristics (Cont.)


**Switching Frequency vs. RT Resistance
Low Frequency Range**

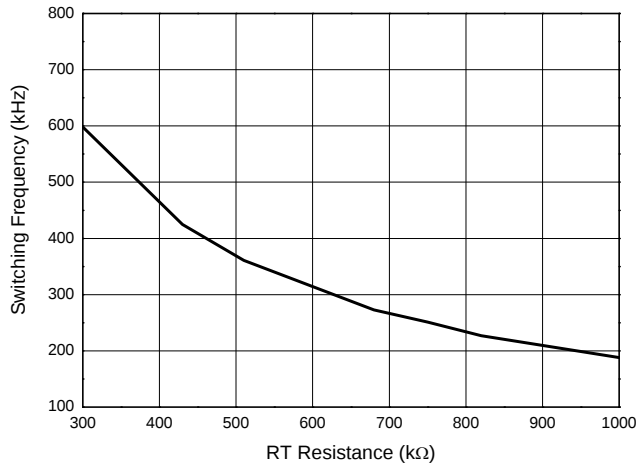


**Switching Frequency vs. RT Resistance
High Frequency Range**

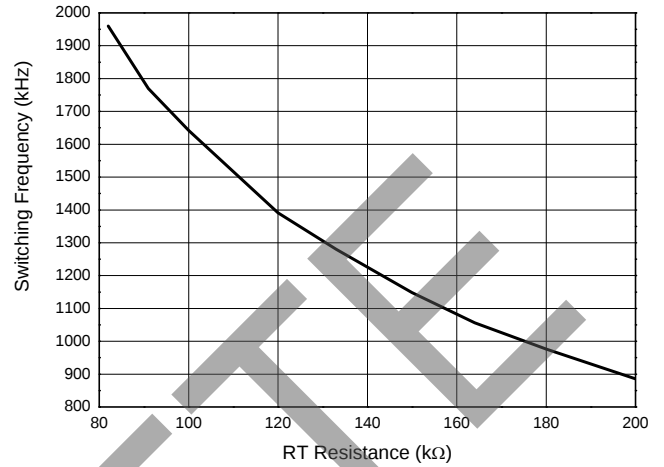


Start up from V_{IN} ($V_{IN}=5V$, $V_{OUT}=1.8V$, $I_{OUT}=3A$)

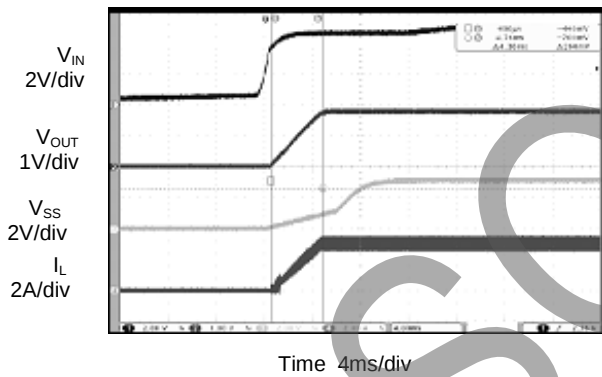


Disable IC ($V_{IN}=5V$, $V_{OUT}=1.8V$, $I_{OUT}=3A$)

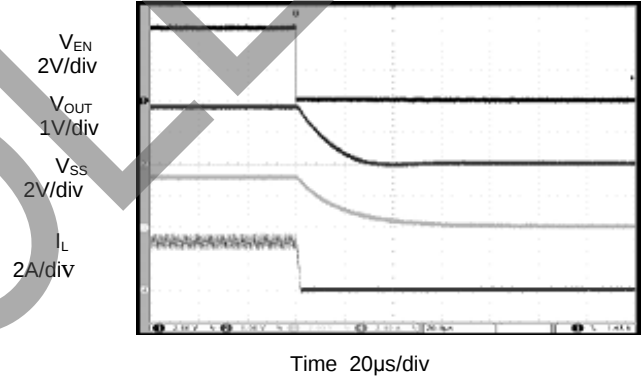

**Load Transient Response
($V_{IN}=5V$, $V_{OUT}=1.8V$, $I_{OUT}=0$ to 3A)**

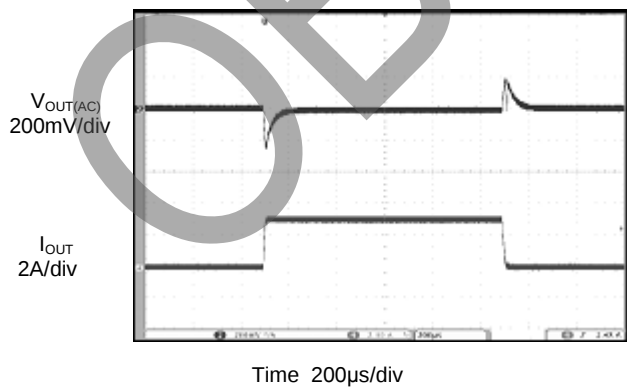


**Synchronizing to External Clock
($f_{CLOCK}=2MHz$)**

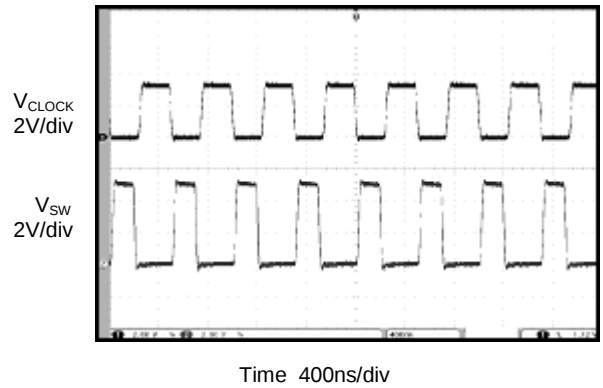


Performance Characteristics (Cont.)

Short Circuit Protection
($V_{IN}=5V$, $V_{OUT}=1.8V$, $I_{OUT}=3A$)

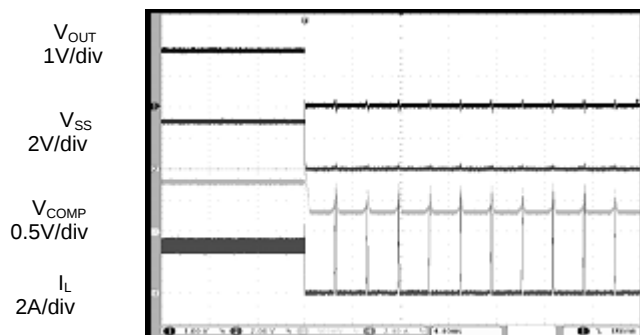

Time 4ms/div


Short Circuit Recovery
($V_{IN}=5V$, $V_{OUT}=1.8V$, $I_{OUT}=3A$)

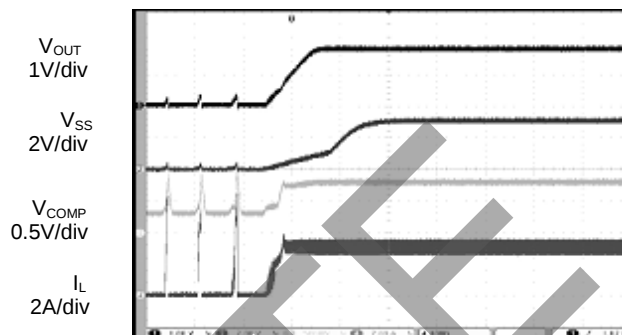

Time 4ms/div

Ordering Information


AP3433 XX XX - XX

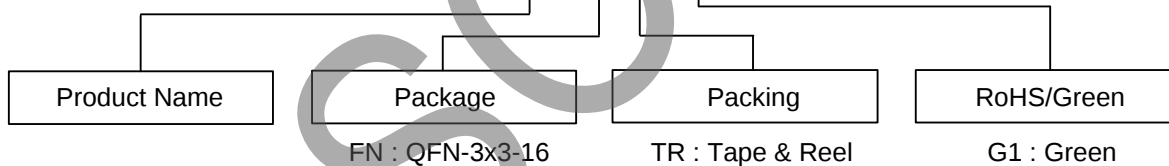

Package	Temperature Range	Part Number	Marking ID	Packing
QFN-3x3-16	-40 to +85°C	AP3433FNTR-G1	B1D	Tape & Reel

Package Outline Dimensions (All dimensions in mm(inch).)

(1) Package Type: QFN-3×3-16

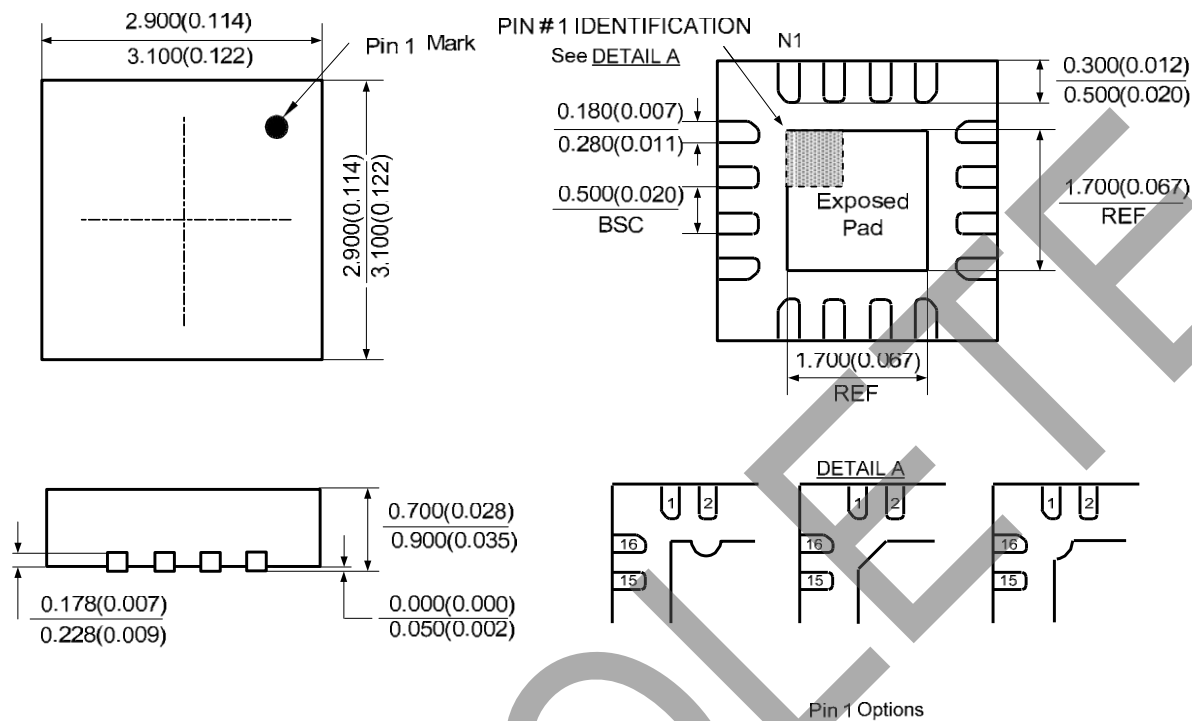

IMPORTANT NOTICE

DIODES INCORPORATED MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARDS TO THIS DOCUMENT, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION).

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein. Diodes Incorporated does not assume any liability arising out of the application or use of this document or any product described herein; neither does Diodes Incorporated convey any license under its patent or trademark rights, nor the rights of others. Any Customer or user of this document or products described herein in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on Diodes Incorporated website, harmless against all damages.

Diodes Incorporated does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel. Should Customers purchase or use Diodes Incorporated products for any unintended or unauthorized application, Customers shall indemnify and hold Diodes Incorporated and its representatives harmless against all claims, damages, expenses, and attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized application.

Products described herein may be covered by one or more United States, international or foreign patents pending. Product names and markings noted herein may also be covered by one or more United States, international or foreign trademarks.

This document is written in English but may be translated into multiple languages for reference. Only the English version of this document is the final and determinative format released by Diodes Incorporated.

LIFE SUPPORT

Diodes Incorporated products are specifically not authorized for use as critical components in life support devices or systems without the express written approval of the Chief Executive Officer of Diodes Incorporated. As used herein:

A. Life support devices or systems are devices or systems which:

1. are intended to implant into the body, or
2. support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in significant injury to the user.

B. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or to affect its safety or effectiveness.

Customers represent that they have all necessary expertise in the safety and regulatory ramifications of their life support devices or systems, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of Diodes Incorporated products in such safety-critical, life support devices or systems, notwithstanding any devices- or systems-related information or support that may be provided by Diodes Incorporated. Further, Customers must fully indemnify Diodes Incorporated and its representatives against any damages arising out of the use of Diodes Incorporated products in such safety-critical, life support devices or systems.

Copyright © 2018, Diodes Incorporated

www.diodes.com