



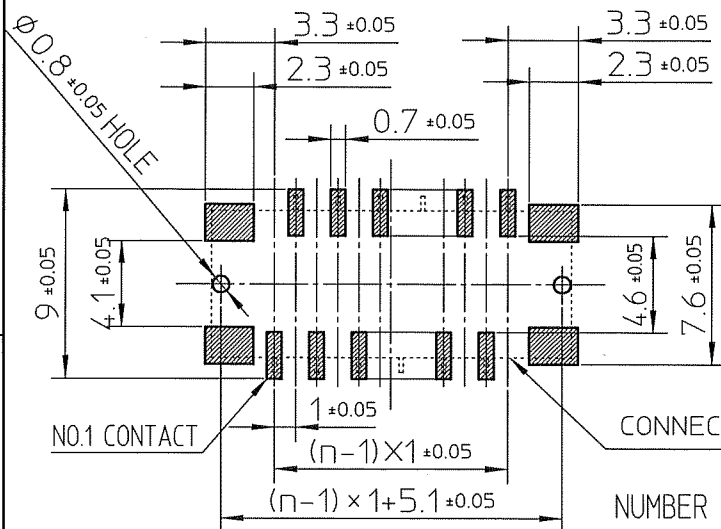

RECOMMENDED PC BOARD LAYOUT (COMPONENT SIDE)



NOTE

1. This connector is symmetric for X, Y axis. As a result, it is possible to locate in emboss cavity even if rotated condition.
2. Flatness for contact terminal and mounting plate must be within 0.1.
3. This product meets European Union Directives and other country regulations as described in GS-22-008.

mat'l. code				surface ISO 1302 ✓		tolerance ISO 406 ISO 1101		projection 		product family 590F										
ltr	ecn no	dr	date	tolerances unless otherwise specified							title FLOATING BOARD TO BOARD PLUG CONNECTOR (GOLD PLATING AND LEAD FREE) (Cat.No. BTFW__P-3SBTALF)									
A	J06-0146	M.K	Apr.11,'06	angles	linear	± 0.3														
B	J07-0021	M.K	Jan.15,'07																	
									scale	dwg no JSA 96388 sheet 2 of 2 A4										
				dr	K.Higuchi		Jan.15,'07													
				engr	M.Koga		Jan.15,'07													
				chr	K.Higuchi		Jan.15,'07													
				appd	M.Koga		Jan.15,'07													
sheet index	revision sheet	B	B																Rev B	