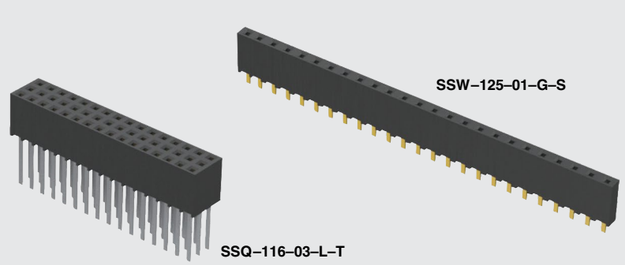

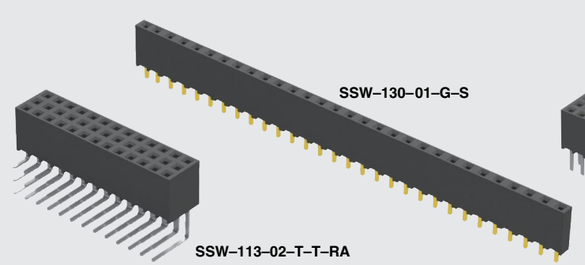

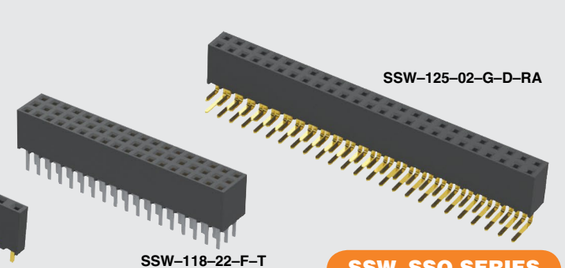

(2.54 mm) .100"

SSW, SSQ SERIES

THROUGH-HOLE .025" SQ POST SOCKET

SPECIFICATIONS

For complete specifications see www.samtec.com?SSW or www.samtec.com?SSQ

Insulator Material:
Black Liquid Crystal Polymer (-S & -D) or
Black High Temperature Thermoplastic (-T)
Contact Material:
Phosphor Bronze
Plating:
Au or Sn over
50 µ" (1.27 µm) Ni
Current Rating (SSW/TSM):
4.7 A per pin
(2 pins powered)
Current Rating (SSQ/TSW):
6.3 A per pin
(2 pins powered)
Operating Temp Range:
-55 °C to +125 °C with Gold
-55 °C to +105 °C with Tin
Insertion Depth:
(3.68 mm) .145" to
(6.35 mm) .250"
Normal Force:
Standard= 125 grams (4.4 N)
Max Cycles:
100 with 10 µ" (0.25 µm) Au
Voltage Rating:
465 VAC / 655 VDC
RoHS Compliant:
Yes

PROCESSING

Lead–Free Solderable:
Yes:
-S and -D row option
No, Lead Wave only:
-P, -T and -Q row option

RECOGNITIONS

For complete scope of recognitions see www.samtec.com/quality

FILE NO. E111594

Note:
Some lengths, styles and options are non-standard, non-returnable.

Mates With:
TSW, MTSW, MTLW, DW, EW, ZW, TSS, ZSS, TSM, TSSH, HTSS

HIGH-SPEED CHANNEL PERFORMANCE
Rating based on Samtec reference channel. For full SI performance data visit Samtec.com or contact SIG@samtec.com
8 Gbps

TIGER BUY™ CONTACT

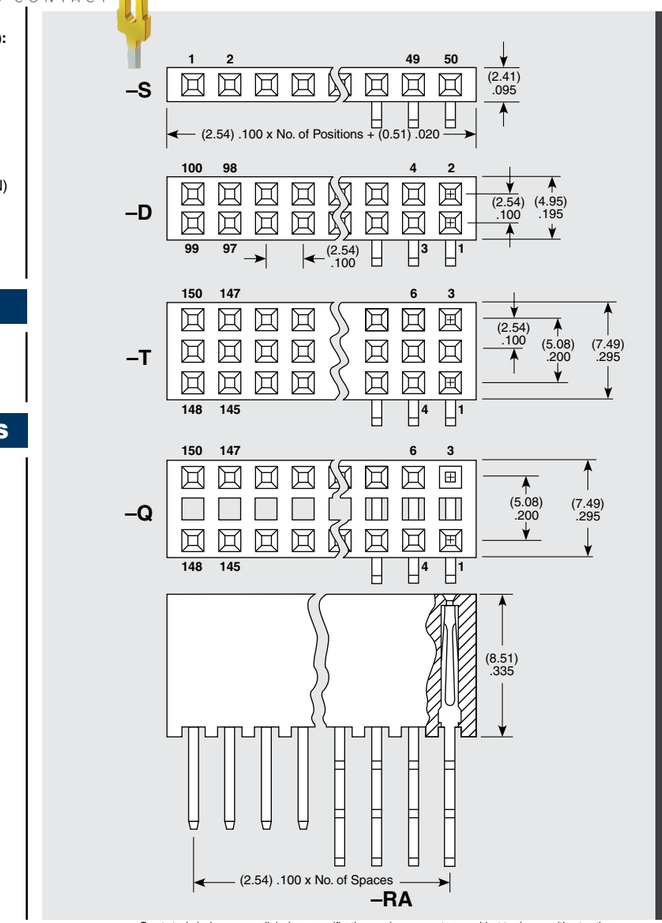

TYPE STRIP	PIN CENTERS	NO. PINS PER ROW
SSW = Solder Tail	**–1** = (2.54 mm) .100" Centers	**01 thru 50**
SSQ = Square Tail		



LEAD STYLE	PLATING OPTION	ROW OPTION	TAIL OPTION	OTHER OPTION
	–F = Gold flash on contact, Matte Tin on tail	**–S** = Single Row	**–RA** = Right-angle (Leave blank for straight pin version)	**–LL** = Locking Lead
	–L = 10 µ" (0.25 µm) Gold on contact, Matte Tin on tail	**–P** = Single Row (36 pins max)		Two leads per strip crimped in opposite directions on or near centerline. Available on tails from (2.29 mm) .090" to (7.87 mm) .310" only. N/A with single row 1 or 2 positions.
	–G = 20 µ" (0.51 µm) Gold on contact, Gold flash on tail	**–D** = Double Row		**–"XXX"** = Polarized (Specify "XXX" as position number)
	–T = Matte Tin (-T N/A on LIF contacts)	**–T** = Triple Row		
		–Q = Double Row .200" (5.08 mm) row space (Outer rows filled only)		

ALSO AVAILABLE
(MOQ Required)
- Other platings
- Notch option

Straight Pin Versions (Specify "LEAD STYLE" from chart)

LEAD STYLE		SINGLE DOUBLE OR TRIPLE
Standard Insertion Force	Low Insertion Force*	A
–01	–21	(2.64) .104
–02	–22	(4.93) .194
–03	–23	(10.00) .394
–04	–24	(14.83) .584
–06**	Not Available	(3.15) .124

* LIF not available with Tin Plating
**Style –06 Not available with SSQ

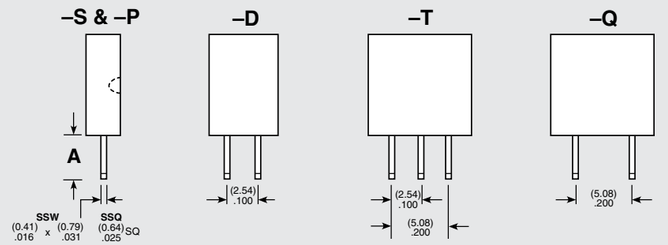

Right-Angle Versions (Specify "LEAD STYLE" from chart)

LEAD STYLE		SINGLE	DOUBLE	TRIPLE
Standard Insertion Force	Low Insertion Force*	(–S) A	(–D) A	(–T & –Q) A
–02	–22	(2.54) .100	(2.54) .100	(2.54) .100
–03	–23	(7.62) .300	(7.62) .300	Not Available
–04	–24	(12.45) .490	Not Available	Not Available

*LIF not available with Tin Plating

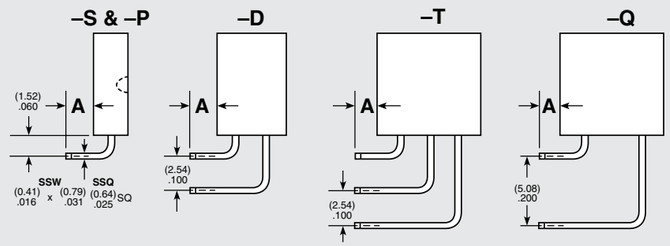

Downloaded from Arrow.com.