

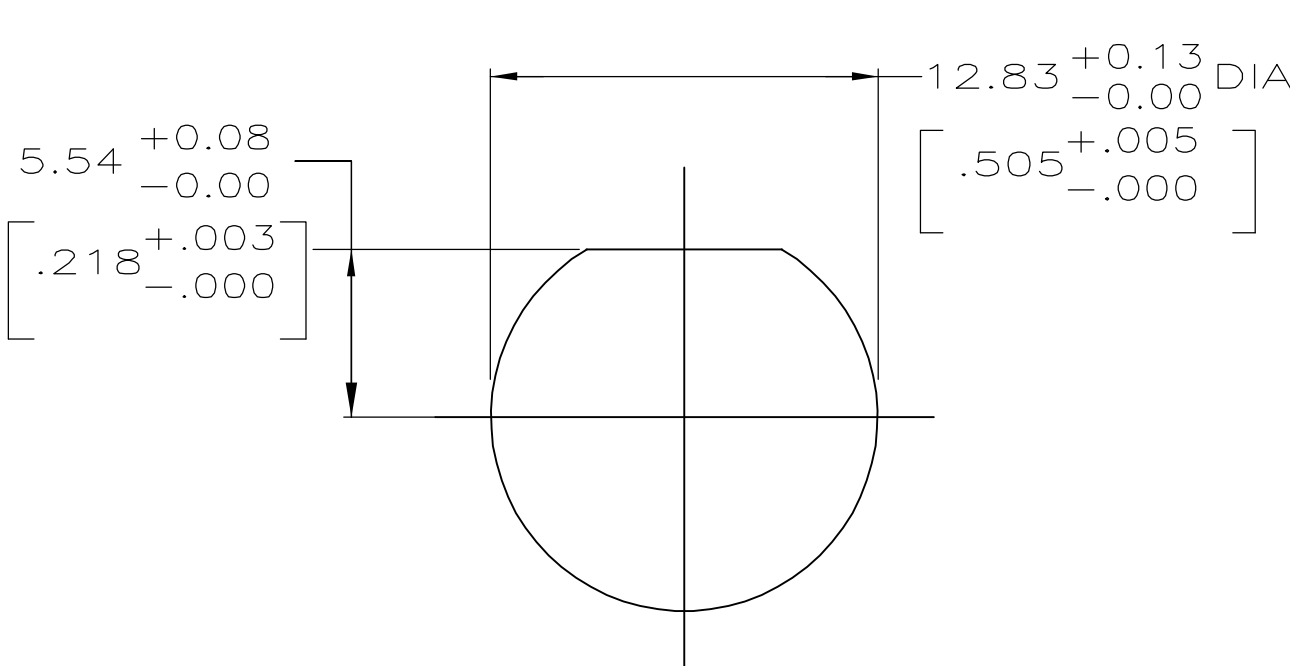
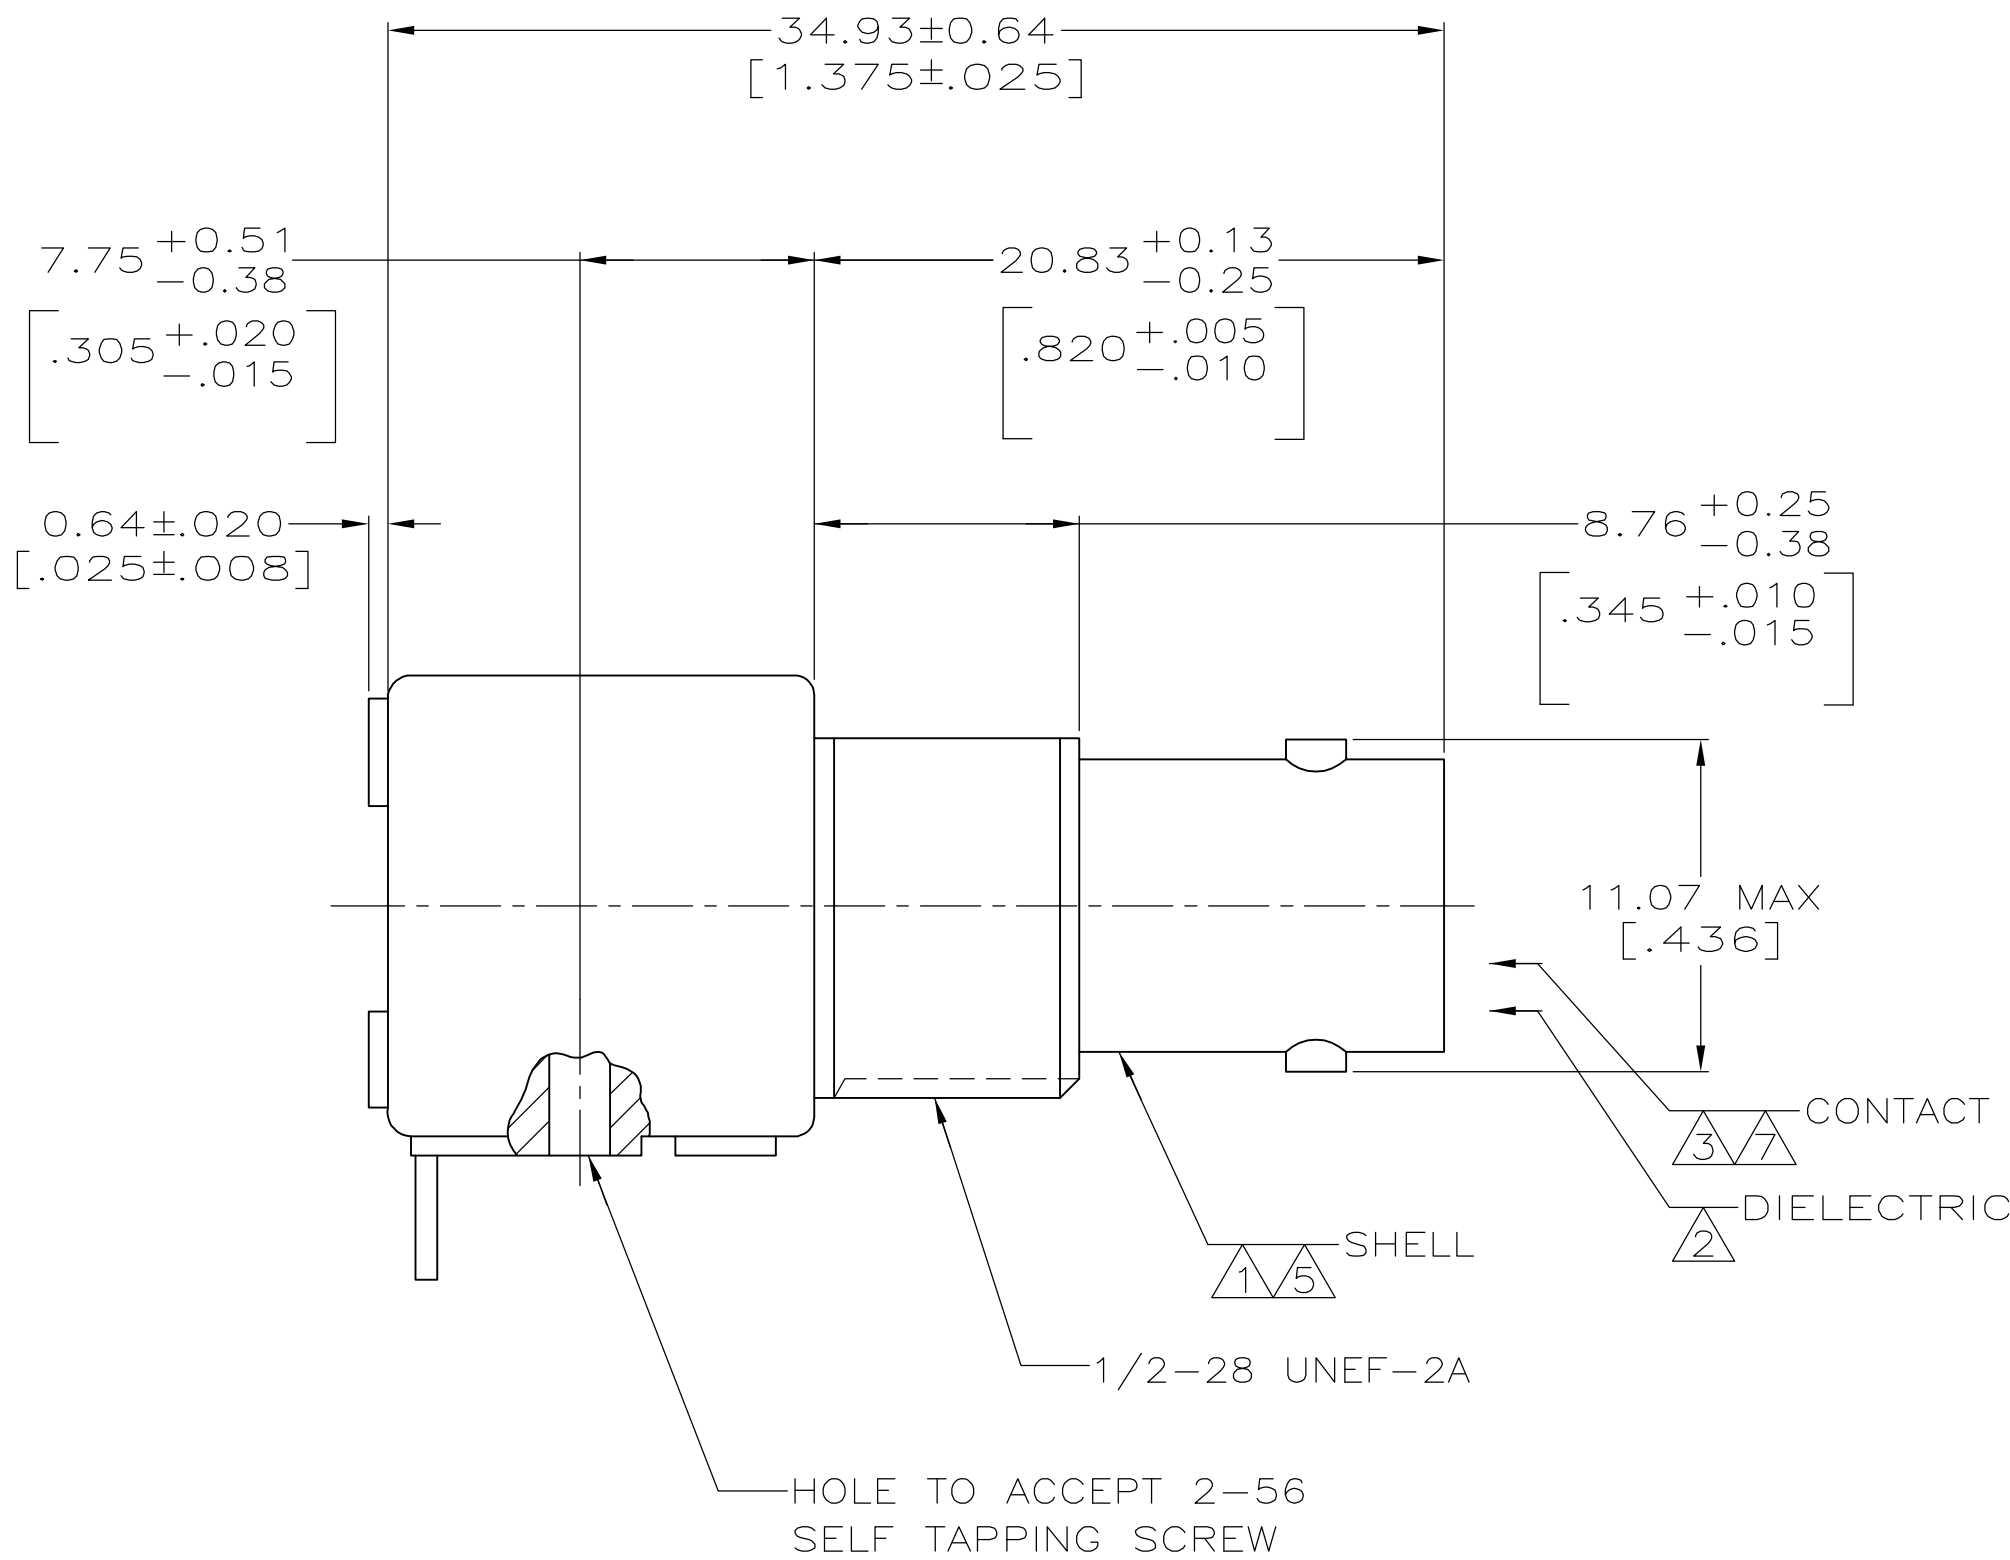


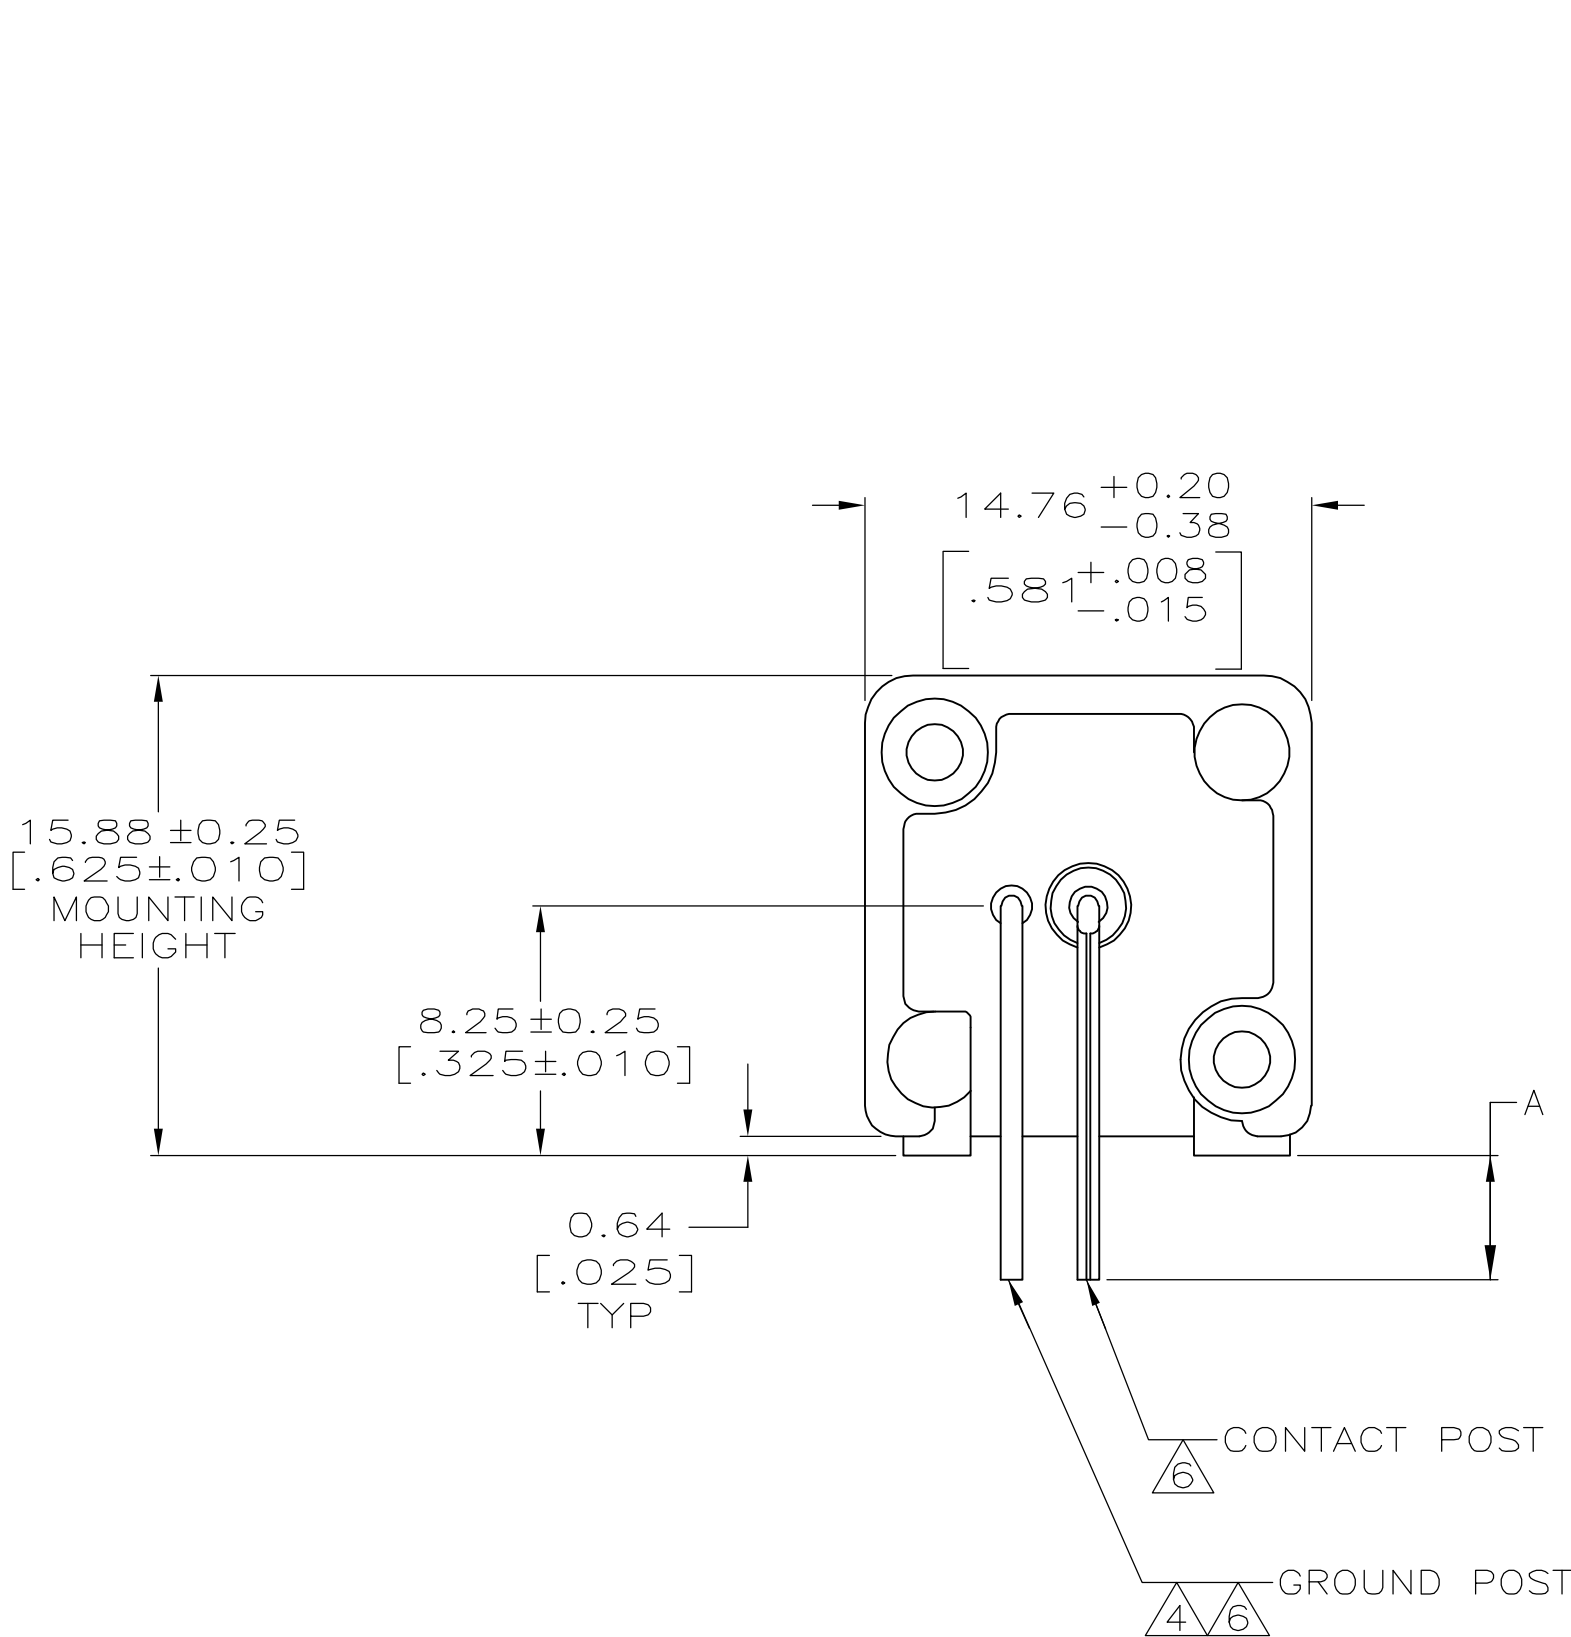

RECOMMENDED PANEL CUTOUT

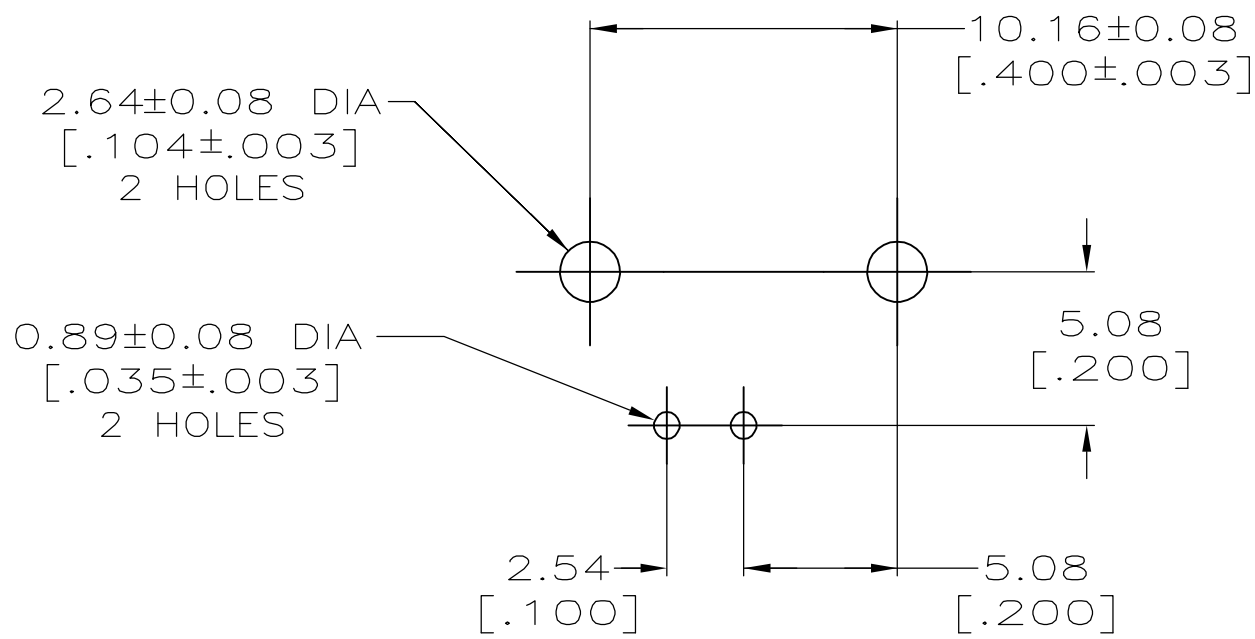

PCB CONFIGURATION

- 1 ZINC PER QQ-Z-363.
- 2 POLYMETHYLPENTENE, GENERAL PURPOSE.
- 3 PHOSPHOR BRONZE PER QQ-B-750.
- 4 BRASS PER ASTM-B-453.
- 5 NICKEL PLATE PER QQ-N-290, 3.81 μm [.000150] MINIMUM THICK.
- 6 TIN PLATE PER ASTM-B-545, 3.81 μm [.000150] MINIMUM THICK.
- 7 GOLD PLATE PER MIL-G-45204, 0.76 μm [.000030] MINIMUM THICK.
- 8. SEE INSTRUCTION SHEET 2769.

2.79 ± 0.25 [.110 ± 0.010]	227676-2
4.11 ± 0.43 [.162 ± 0.017]	227676-1

A	PART NUMBER
---	-------------

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. LIPPERT 6-25-92	tyco Electronics Tyco Electronics Corporation Harrisburg, PA 17105-3608	
DIMENSIONS: INCHES		CHK A. GABANY 6-26-92		
	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD A. GABANY 6-26-92	NAME	
	0 PLC $\pm$ -	PRODUCT SPEC	JACK, RIGHT ANGLE, PCB	
	1 PLC $\pm$ -	108-12078	50 OHM, SERIES BNC	
	2 PLC $\pm$ 0.05 [.002]	APPLICATION SPEC		
MATERIAL	3 PLC $\pm$ -	—	SIZE	CAGE CODE
	4 PLC $\pm$ -	—	—	DRAWING NO
ANGLES	FINISH	WEIGHT	A1 00779 $\text{\textcircled{C}}$ 227676	
1 2 3 4	5 6 7	CUSTOMER DRAWING		RESTRICTED TO
		SCALE	4:1	SHEET 1 OF 1
		REV	E	