

PRODUCT NUMBER
57202-XXX-XXXXL F






- PLATING
- S = 0.38µm GOLD/GXT ON CONTACT AREA
2µm MIN MATTE TIN ON TAIL
 - G = 0.76µm GOLD/GXT ON CONTACT AREA
2µm MIN MATTE TIN ON TAIL
 - F = GOLD FLASH ON CONTACT AREA
2µm MIN MATTE TIN ON TAIL
 - T = 2-6.0µm FULL MATTE TIN
 - 1.27µm MIN NICKEL UNDERPLATING
- RoHS COMPATIBLE
SEE NOTE 7
- POLARIZATION, SEE NOTE 6
- PACKAGING, SEE NOTE 5
- NB OF POS PER ROW : 02 TO 25

STYLE	POST LENGTH ±0.2
51	2.00
52	4.00
53	3.50
54	2.50

NOTES:

- MATERIAL HOUSING: HIGH TEMP. THERMOPLASTIC
UL 94V-0, COLOR BLACK
- MATERIAL TERMINAL: COPPER ALLOY
- TO DETERMINE DIMENSIONS:
N = NUMBER OF POSITIONS PER ROW.
- 7N MIN. PIN RETENTION IN EITHER DIRECTION.
- PACKAGING:
 - = STANDARD PACKAGING IN POLYBAGS
 - = POLYBAGS PACKAGING WHEN POLARISATION FEATURE APPLICABLE.
 - U = TUBE AVAILABLE FROM 04 TO 25 POS PER ROW.
 - A = TAPE AND REEL WITH PICK UP CAP, AS AVAILABLE
 - K = TAPE AND REEL WITHOUT CAP, AS AVAILABLE.
- FOR POLARIZATION, SPECIFY POSITION NUMBER TO OMIT PIN.
EXAMPLE : 03 = OMIT PIN POSITION 3, SEE TOP VIEW.
OMIT FROM PRODUCT NUMBER IF THIS FEATURE IS NOT APPLICABLE.
- RoHS COMPATIBLE PRODUCT SPECIFICATIONS

- a - PLATING:
- "LF" MEANS THE PRODUCT IS LEAD-FREE,
2µm MINIMUM MATTE TIN OVER 1.27µm
MINIMUM NICKEL UNDERPLATE.
 - b - MANUFACTURING PROCESS COMPATIBILITY
 - THE HOUSING WILL WITHSTAND EXPOSURE TO
260°C PEAK TEMPERATURE FOR 30 SECONDS
IN A CONNECTION, INFRA-RED OR VAPOR
PHASE REFLOW OVEN.
 - c - LABELLING:
 - MEETS PACKAGING SPECS AS PER GS-14-920
 - d - LEGAL STATEMENT : SEE GS-47-0004

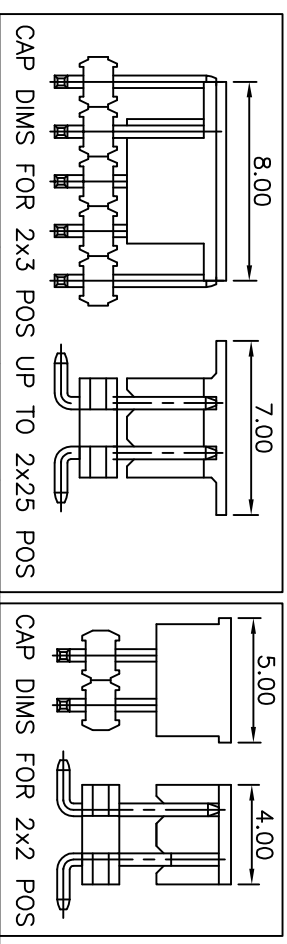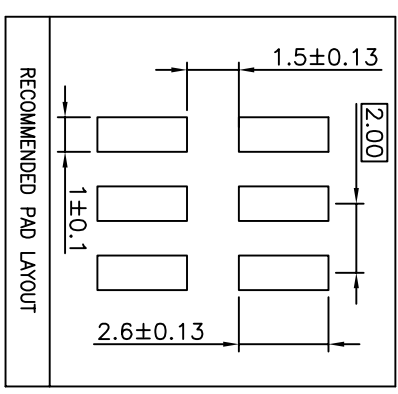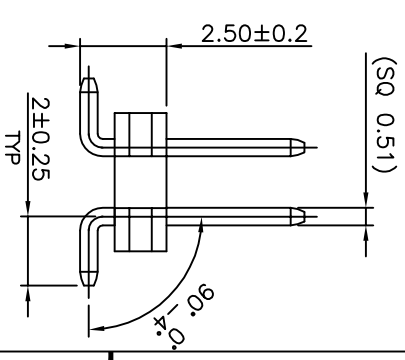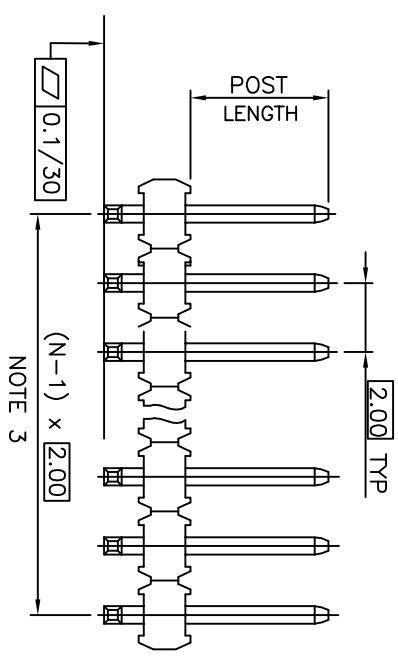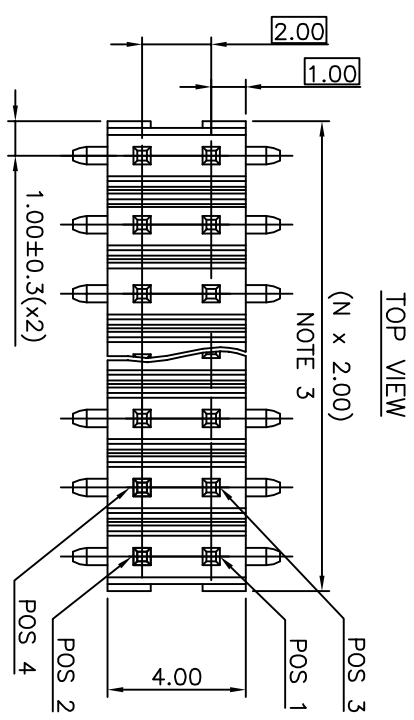

mat'l. code	ISO 1302	tolerance	ISO 406	ISO 101	projection	product family
ecm no	dr	date	tolerances unless otherwise specified	XX	±0.3	MINITEK
L	T09-0087	J00	09.09.04	linear	XX	±0.13
M	F11-0028	LWU	11.05.12	linear	XXX	±0.05
N	B-19190	LWU	14.10.24	linear	XXX	±0.05
P	B-19797	AMA	14.12.16	dr	L MULIN	04.05.06
R	B-19988	LWU	15.01.13	engr	JU COMPAGNON	04.11.25
S	B-20032	AMA	15.01.20	chr	JM.C	04.11.25
T	F-23051	AMA	16.01.15	appd	JM.C	04.11.25
sheet	revision					
index	sheet					

FCI

UNSH HEADER

2.00 mm VERTICAL SMT

57202

CUSTOMER Drawing

sheet 1 of 1

A3