


# DFCH3836MHDJAA

## Dimensions and Marking

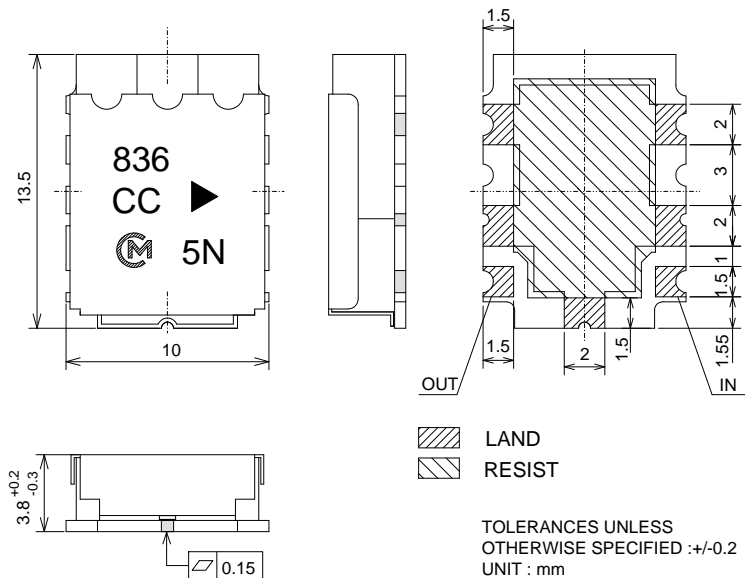


NOTE : Construction of Number

LOT NO : 5N 5 : Year

N: Month (1 to 9, Oct.-O, Nov.-N, Dec.-D)

## Recommend Land Pattern (reference)

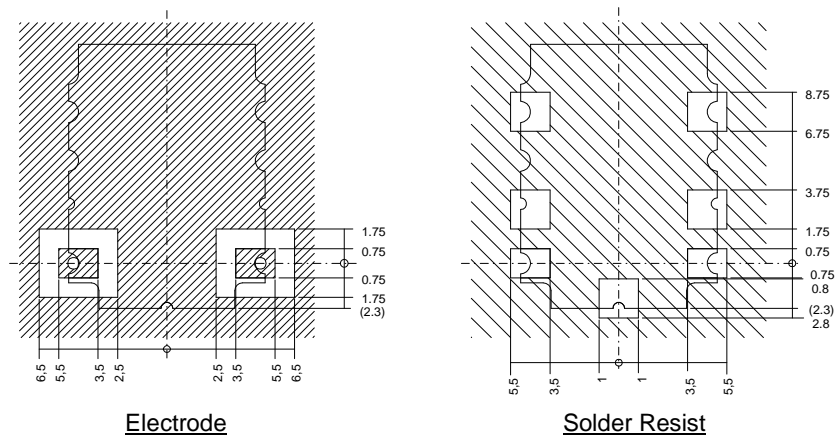


Note : Impedance of signal lines should be 50 ohms including land pattern. This standard condition is applying to the glass epoxy board ( $t = 1.0\text{mm}$ , dielectric constant = 4.8, copper plating on both surfaces) and the land patterns are connected to 50 ohms micro-strip lines on back side surface through the via hole.

All Rights Reserved, Copyright© Murata Manufacturing Co., Ltd

\*Note: All the technical data and information contained herein are subject to change without advanced notice.

# DFCH3836MHDJAA

## Dimensions of Carrier Tape

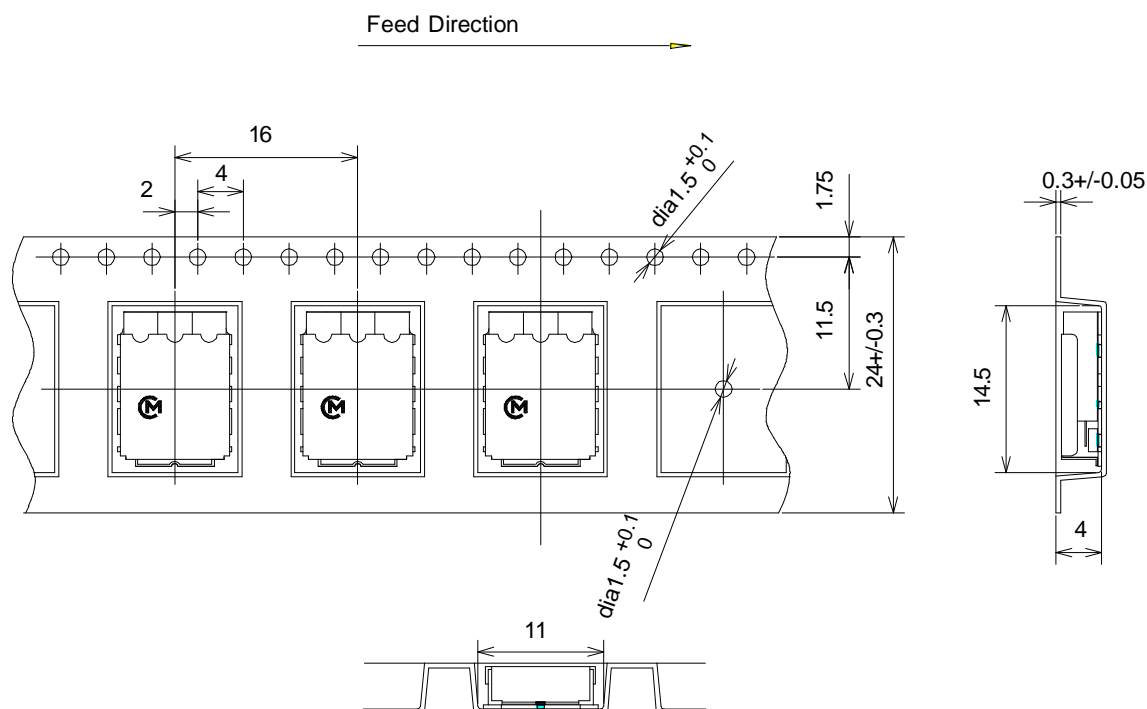


TOLERANCES UNLESS

OTHERWISE SPECIFIED :  $\pm 0.1$ 

DIMENSIONS : mm

## Dimensions of Reel

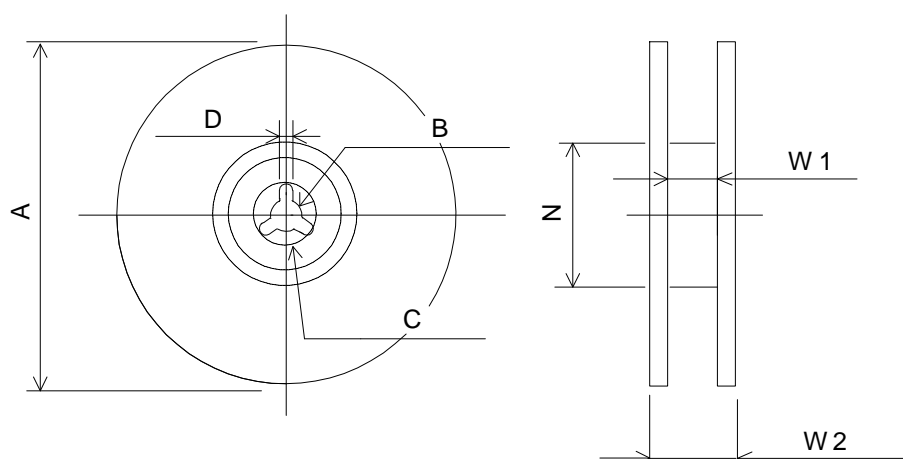


Murata Part Number	A $\pm 2.0$	B $\pm 0.5$	C $\pm 0.8$	D $\pm 0.5$	N (min.)	W1 $\pm 1.5$	W2 (max.)
DFCH3836MHDJAA-RF1	$\phi 330$	$\phi 13$	$\phi 21$	2	$\phi 50$	25.5	31

All Rights Reserved, Copyright© Murata Manufacturing Co., Ltd

\*Note: All the technical data and information contained herein are subject to change without advanced notice.


# DFCH3836MHDJAA

## Taping Condition

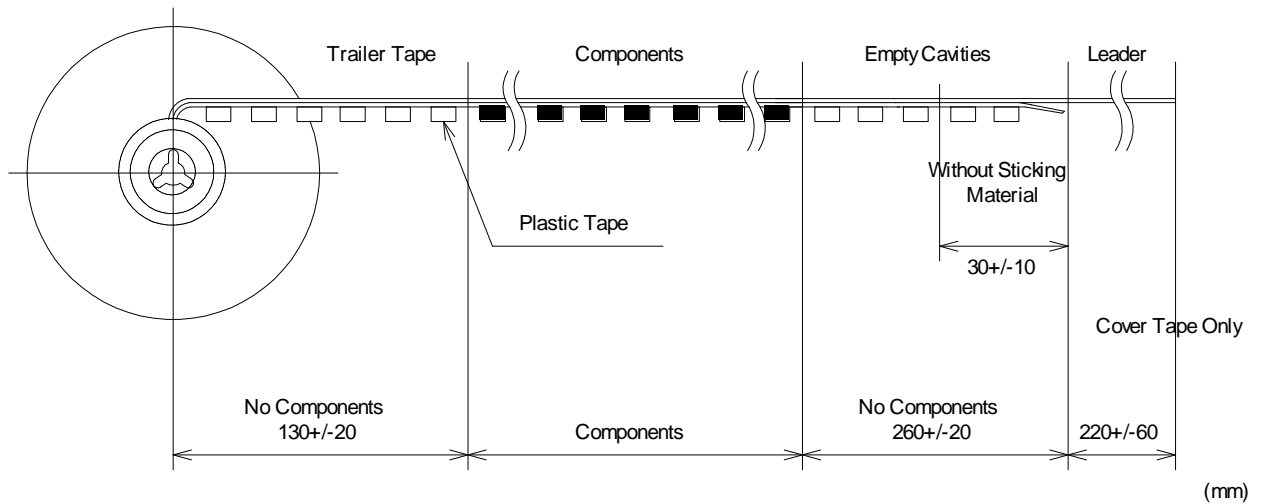

# DFCH3836MHDJAA

## Reflow Soldering Standard Conditions

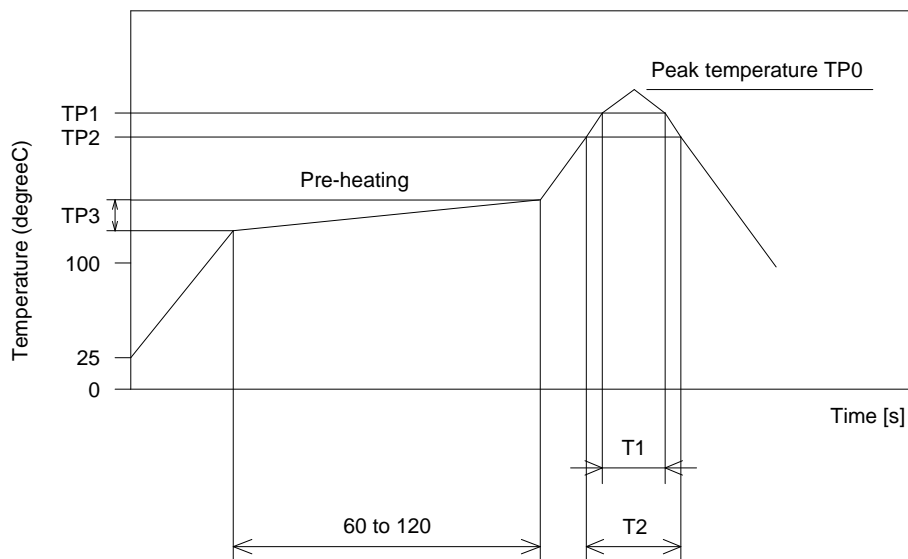


Measuring point of temperature : IN-OUT Terminals of The Device

Reflow Soldering : Both Convection and Infrared Rays, Hot Air and Hot Plate

		TP0 (°C )	TP1 (°C )	T1 (s)	TP2 (°C )	T2 (s)	TP3 (°C )
Reflow standard condition	Sn-40Pb solder	225+/-5	200	20 to 40	---	---	140 to 160
	Sn-3Ag-0.5Cu solder	245+/-5	220	30 to 60	---	---	150 to 180
Test condition of reflow heat resistance		260+5/-0	240	20	220	70	150 to 180

## Allowable Temperature and Time of Reflow Soldering

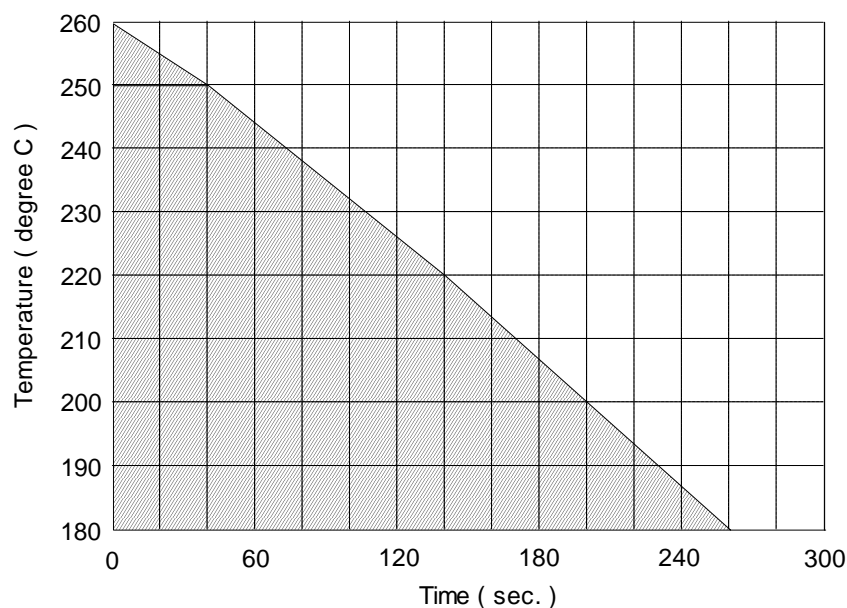

All Rights Reserved, Copyright© Murata Manufacturing Co., Ltd

\*Note: All the technical data and information contained herein are subject to change without advanced notice.