

DSC Series



Performance Data

			Maximum	Typical
Load at rated power: 1000 hours at 70°C			ΔR%	
			1	0.25
Derating from rated power at 70°C			Zero at 155°C	
Overload: 6.25 x rated power for 2 seconds			ΔR%	
			1	0.1
Shelf life test: 12 months at room temperature			ΔR%	
			0.1	0.02
Dry heat: 1000 hours at 155°C			ΔR%	
			1	0.2
Long term damp heat			ΔR%	
			1	0.25
Temperature rapid change			ΔR%	
			0.25	0.05
Anti-sulphur grade (AS)	ASTM-B-809 (1000 hours, 50°C, 91-93% RH)	ΔR%	0.25	0.05
Sulphur-resistant grade (SR)	EIA-977 (750 hours, 105°C)	ΔR%	0.25	0.05
	ASTM-B-809 (1000 hours, 50°C, 91-93% RH)	ΔR%	0.25	0.05
	Modified ASTM-B-809 (1000 hours, 105°C, 85% RH)	ΔR%	1	0.25
Resistance to solder heat			ΔR%	
			0.25	0.05

Pulse Performance Data

Lightning Surge

Resistors are tested in accordance with IEC 60 115-1 using both 1.2/50μs and 10/700μs pulse shapes. 10 pulses are applied. The limit of acceptance is a shift in resistance of less than 1% from the initial value.

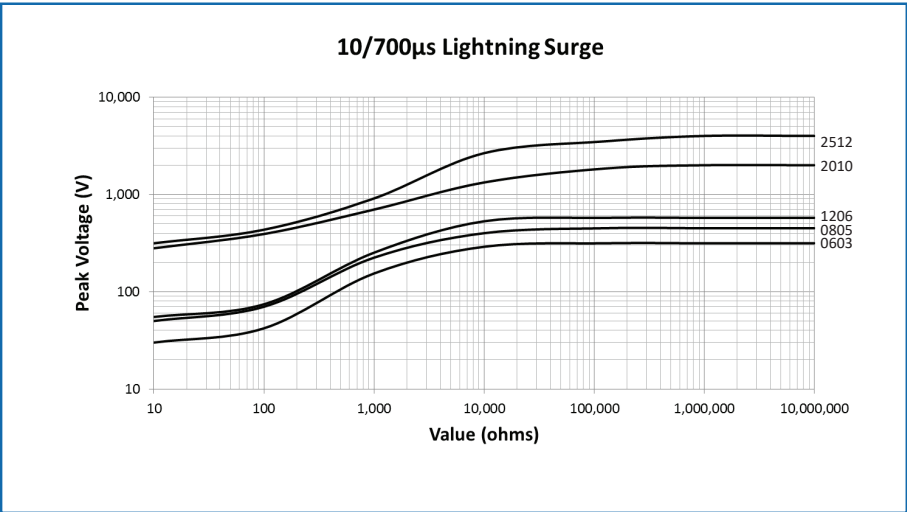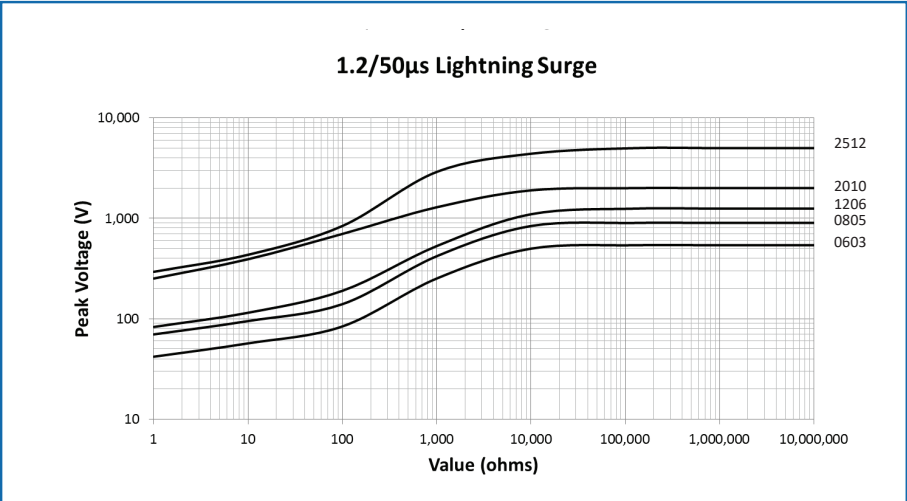


General Note

TT Electronics reserves the right to make changes in product specification without notice or liability.
All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

DSC Series


Single Pulse

The single impulse graph is the result of 50 impulses of rectangular shape applied at one-minute intervals. The limit of acceptance was a shift in resistance of less than 1% from the initial value.

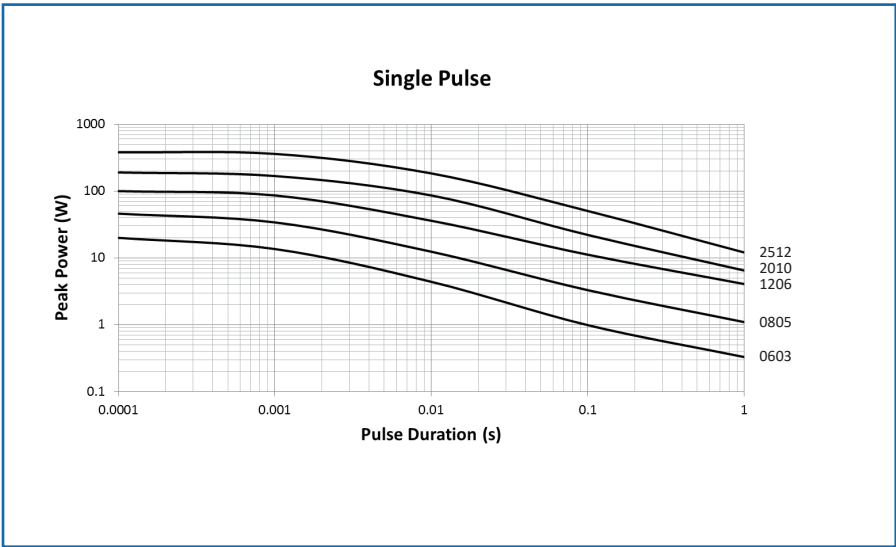

Continuous Load Due to Repetitive Pulses

The continuous load graph was obtained by applying repetitive rectangular pulses where the pulse period was adjusted so that the average power dissipated in the resistor was equal to its rated power at 70°C. Again the limit of acceptance was a shift in resistance of less than 1% from the initial value.

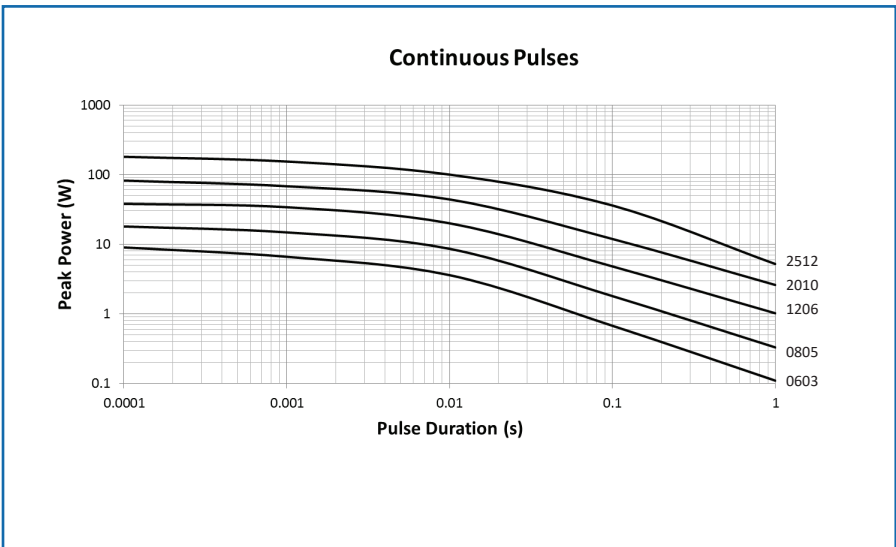


General Note

TT Electronics reserves the right to make changes in product specification without notice or liability.
All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

DSC Series

Thermal Performance Data

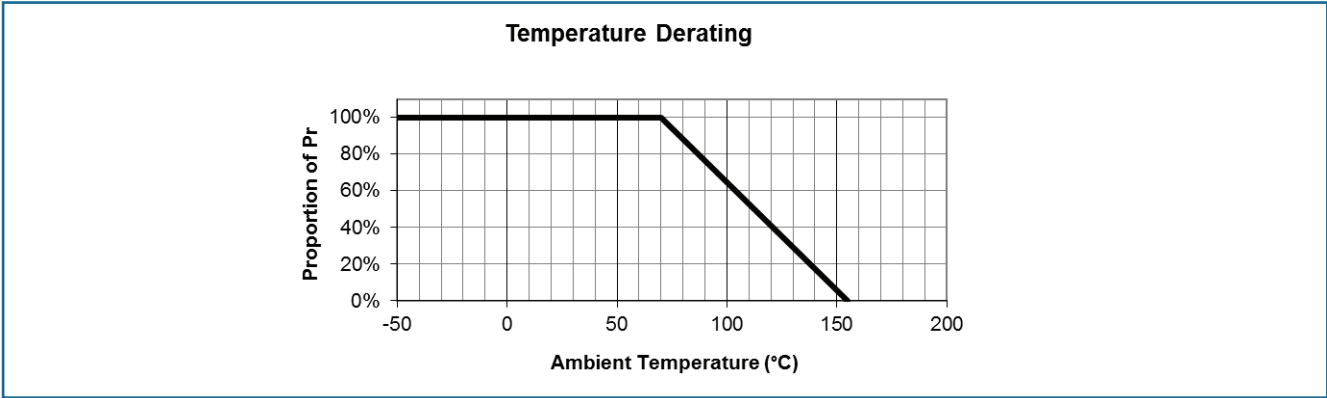

Packaging

0603, 0805 and 1206 resistors are supplied on 8mm carrier tape and 2010 and 2512 resistors are supplied on 12mm carrier tape, all on 7 inch reels as per IEC 286-3.

Application Notes

DSC resistors are ideally suited for handling by automatic methods due to their rectangular shape and the small dimensional tolerances. Electrical connection to a ceramic substrate or to a printed circuit board can be made by reflow or wave soldering of wrap-around terminations.

Wrap-around terminations provide good leach properties and ensure reliable contact. Due to the robust construction, the DSC can be immersed in the solder bath for 30 seconds at 260°C. This enables the resistor to be mounted on one side

of a printed circuit board and wire-leaded components applied on the other side. DSC is compatible with typical Pb-free soldering materials and temperature profiles.

DSC resistors themselves can operate at a maximum temperature of 155°C. For soldered resistors, the joint temperature should not exceed 110°C. This condition is met when the stated power levels at 70°C and recommended pad and trace areas are used. Pad and trace area is defined as the total area of the solder pad plus all copper trace within two squares of the edge of the solder pad. Allowance should be made if smaller areas of copper are used.

Ordering Procedure

Example: DSC2512-10KFT18 (DSC2512, 10 kilohms ±1%, Pb-free)

D	S	C	2	5	1	2	-	1	0	K	F	T	1	8
1	2	3	4	5	6									

1 Type	2 Size	3 Sulphur Grade¹	4 Value	5 Tolerance	6 Termination & Packing
DSC	0603	Omit for Standard	E24 = 3/4 characters	D ±0.5%	Standard Pb-free finish
	0805	AS Anti-Sulphur	E96 = 3/4 characters	F ±1%	T5 0603 5000/reel standard
	1206	SR Sulphur Resistant	R = ohms	J ±5%	T3 0805 3000/reel standard
	2010		K = kilohms		T3 1206 3000/reel standard
	2512		M = megohms		T3 2010 3000/reel standard
					T18 2512 1800/reel standard
					T1 All sizes 1000/reel available
					SnPb finish
					PB All sizes Standard quantities as for Pb-free

Note 1: For new designs requiring resistance to sulphur-bearing gas, SR grade is preferred.

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.