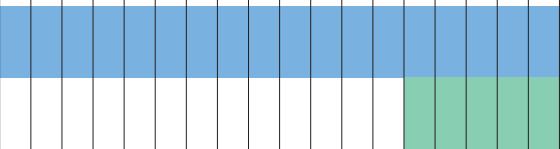
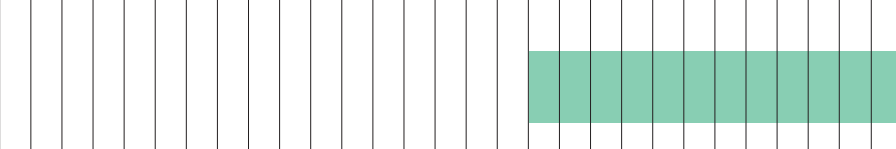
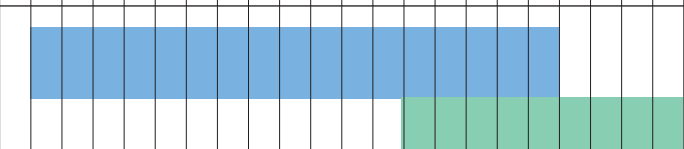
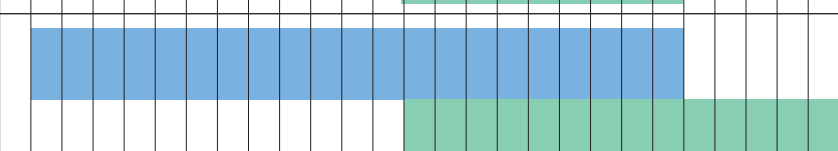
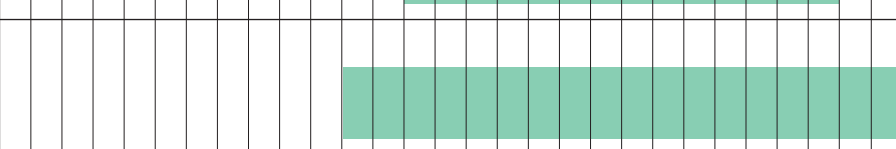


5 pF
10 pF
12 pF
15 pF
18 pF
22 pF
27 pF
33 pF
47 pF
56 pF
68 pF
100 pF
120 pF
150 pF
180 pF
220 pF
270 pF
330 pF
470 pF
560 pF
680 pF
1000 pF
1200 pF
1500 pF
1800 pF
2200 pF
2700 pF
3300 pF
4700 pF

R29 / 1808			INCHES (mm)			 DIELECTRIC NPO X7R											
 X2/Y3	L	.185 ±.015	(4.80 ±.25)														
	W	.080 ±.010	(2.03 ±.25)														
	T	.085 Max.	(2.16)														
	E/B	.020 ±.010	(0.51 ±.25)														
S43 / 1812			INCHES (mm)														
 Y3	L	.175 ±.010	(4.45 ±.25)														
	W	.125 ±.010	(3.17 ±.25)														
	T	.115 Max.	(2.92)														
	E/B	.025 ±.015	(0.64 ±.38)														
R29 / 1808			INCHES (mm)														
 X1/Y2	L	.185 ±.015	(4.80 ±.25)														
	W	.080 ±.010	(2.03 ±.25)														
	T	.085 Max.	(2.16)														
	E/B	.012 ±.005	(0.30 ±.13)														
R30 / 2211			INCHES (mm)														
 Y2	L	.225 ±.016	(5.72 ±.40)														
	W	.110 ±.010	(2.80 ±.25)														
	T	.115 Max.	(2.92)														
	E/B	.020 ±.010	(0.51 ±.25)														
S47 / 2220			INCHES (mm)														
 X1/Y2	L	.225 ±.015	(5.72 ±.38)														
	W	.200 ±.015	(5.08 ±.38)														
	T	.150 Max.	(3.81)														
	E/B	.025 ±.015	(0.64 ±.38)														

470pF 1000pF 2200pF 3300pF 4700pF 0.01μF 0.022μF 0.047μF 0.10μF

J29 / 1808										
		INCHES	(mm)							
	L	.189 ±.010	(4.80 ±.25)							
	W	.080 ±.010	(2.03 ±.25)							
	T	.085 Max.	(2.16)							
	Japan Safety E/B	.020 ±.010	(0.51±.25)							
J43 / 1812										
		INCHES	(mm)							
	L	.175 ±.010	(4.45 ±.25)							
	W	.125 ±.010	(3.17 ±.25)							
	T	.115 Max.	(2.92)							
	Japan Safety E/B	.025 ±.015	(0.64±.38)							
J47 / 2220										
		INCHES	(mm)							
	L	.225 ±.015	(5.72 ±.38)							
	W	.200 ±.015	(5.08 ±.38)							
	T	.150 Max.	(3.81)							
	Japan Safety E/B	.025 ±.015	(0.64±.38)							