


◆寸法図／DIMENSIONS

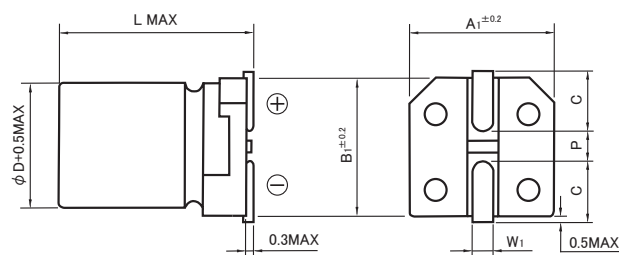

(mm)

φD	L	A1	B1	C	W1	P
4	6.1	4.3	4.3	1.8	0.5~0.8	1.0
5	6.1	5.3	5.3	2.2	0.5~0.8	1.3
6.3	6.1	6.6	6.6	2.7	0.5~0.8	1.8
6.3	8	6.6	6.6	2.7	0.5~0.8	1.8
8	10.5	8.3	8.3	2.9	0.8~1.1	3.1
10	10.5	10.3	10.3	3.2	0.8~1.1	4.5

◆標準品一覧表／STANDARD SIZE

Size φD×L(mm), Rated Ripple Current (mA r.m.s./105°C, 100kHz), Impedance(Ω MAX/20°C, 100kHz)

Vdc	Cap (μF)	Size (φDXL)	Ripple	Impedance
6.3	22	4×6.1	90	1.35
	47	4×6.1	90	1.35
		5×6.1	170	0.70
	100	5×6.1	170	0.70
		6.3×6.1	250	0.36
	220	6.3×6.1	250	0.36
		6.3×8	300	0.34
	330	6.3×8	300	0.34
10	1000	8×10.5	600	0.16
	33	4×6.1	90	1.35
	220	6.3×8	300	0.34
	470	8×10.5	600	0.16
	680	8×10.5	600	0.16
16	1000	10×10.5	850	0.08
	10	4×6.1	90	1.35
		5×6.1	170	0.70
	22	4×6.1	90	1.35
		5×6.1	170	0.70
	33	5×6.1	170	0.70
		6.3×6.1	250	0.36
	47	5×6.1	170	0.70
		6.3×6.1	250	0.36
	100	6.3×6.1	250	0.36
		6.3×8	300	0.34
	220	6.3×8	300	0.34
	330	8×10.5	600	0.16
	470	8×10.5	600	0.16
	680	10×10.5	850	0.08

Vdc	Cap (μF)	Size (φDXL)	Ripple	Impedance
25	33	5×6.1	170	0.70
		6.3×6.1	250	0.36
	47	6.3×6.1	250	0.36
		6.3×8	300	0.34
	220	8×10.5	600	0.16
		8×10.5	600	0.16
	470	10×10.5	850	0.09
		10×10.5	850	0.09
35	4.7	4×6.1	90	1.45
		4×6.1	90	1.45
	10	5×6.1	170	0.70
		5×6.1	170	0.70
	22	5×6.1	170	0.70
		6.3×6.1	250	0.36
	33	6.3×6.1	250	0.36
		6.3×6.1	250	0.36
	47	6.3×6.1	250	0.36
		6.3×8	300	0.34
	100	6.3×8	300	0.34
		8×10.5	600	0.16
50	220	8×10.5	600	0.16
		10×10.5	850	0.09
	330	10×10.5	850	0.09
		10×10.5	850	0.09
	4.7	4×6.1	60	2.90
		4×6.1	60	2.90
	10	5×6.1	85	1.52
		6.3×6.1	165	0.88
	22	6.3×6.1	165	0.88
		6.3×6.1	165	0.88
	33	6.3×8	195	0.68
		6.3×8	195	0.68
	47	6.3×8	195	0.68
		6.3×8	195	0.68
	100	8×10.5	350	0.34
		8×10.5	350	0.34
	220	10×10.5	670	0.18
		10×10.5	670	0.18