

## Ordering Information (Note 4)

| Logic Device                                                              | Function                | Package                                                                                                                                                        | Packing             |
|---------------------------------------------------------------------------|-------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|
| 74 : Logic Prefix<br>LVC : 1.65 to 5.5 V<br>Logic Family<br>1G : One Gate | 32 : 2-Input<br>OR Gate | W5 : SOT25<br>SE : SOT353<br>Z : SOT553<br>FS3 : X2-DFN0808-4<br>FW5 : X1-DFN1010-6 (Type B)<br>FW4 : X2-DFN1010-6<br>FX4 : X2-DFN1409-6<br>FZ4 : X2-DFN1410-6 | -7 : 7" Tape & Reel |


| Part Number    | Package Code | Package (Notes 5 & 6)                    | Package Size                                         | 7" Tape and Reel |                    |
|----------------|--------------|------------------------------------------|------------------------------------------------------|------------------|--------------------|
|                |              |                                          |                                                      | Quantity         | Part Number Suffix |
| 74LVC1G32W5-7  | W5           | SOT25                                    | 3.0mm x 2.8mm x 1.2mm<br>0.95 mm lead pitch          | 3000/Tape & Reel | -7                 |
| 74LVC1G32SE-7  | SE           | SOT353                                   | 2.0mm x 2.0mm x 1.1mm<br>0.65 mm lead pitch          | 3000/Tape & Reel | -7                 |
| 74LVC1G32Z-7   | Z            | SOT553                                   | 1.6mm x 1.6 mm x 0.62mm<br>0.5 mm lead pitch         | 4000/Tape & Reel | -7                 |
| 74LVC1G32FS3-7 | FS3          | X2-DFN0808-4                             | 0.8mm x 0.8mm x 0.35mm<br>0.5 mm pad pitch (diamond) | 5000/Tape & Reel | -7                 |
| 74LVC1G32FW5-7 | FW5          | X1-DFN1010-6 (Type B)                    | 1.0mm x 1.0mm x 0.5mm<br>0.35 mm pad pitch           | 5000/Tape & Reel | -7                 |
| 74LVC1G32FW4-7 | FW4          | X2-DFN1010-6                             | 1.0mm x 1.0mm x 0.4mm<br>0.35 mm pad pitch           | 5000/Tape & Reel | -7                 |
| 74LVC1G32FX4-7 | FX4          | X2-DFN1409-6<br>(Chip scale alternative) | 1.4mm x 0.9mm x 0.4mm<br>0.5 mm pad pitch            | 5000/Tape & Reel | -7                 |
| 74LVC1G32FZ4-7 | FZ4          | X2-DFN1410-6                             | 1.4mm x 1.0mm x 0.4mm<br>0.5 mm pad pitch            | 5000/Tape & Reel | -7                 |

- Notes:
- For packaging details, go to our website at <http://www.diodes.com/products/packages.html>.
  - Pad layout, as shown in Diodes Incorporated suggested pad layouts, can be found at <http://www.diodes.com/package-outlines.html>.
  - The taping orientation is located on our website at <https://www.diodes.com/assets/Packaging-Support-Docs/ap02007.pdf>

## Pin Descriptions

| Pin Name        | Description    |
|-----------------|----------------|
| A               | Data Input     |
| B               | Data Input     |
| GND             | Ground         |
| Y               | Data Output    |
| V <sub>CC</sub> | Supply Voltage |
| NC              | No Connection  |

## Logic Diagram



## Function Table

| Inputs |   | Output |
|--------|---|--------|
| A      | B | Y      |
| H      | X | H      |
| X      | H | H      |
| L      | L | L      |

**Absolute Maximum Ratings** (Notes 7 & 8) (@T<sub>A</sub> = +25°C, unless otherwise specified.)

| Symbol                             | Description                                                           | Rating                       | Unit |
|------------------------------------|-----------------------------------------------------------------------|------------------------------|------|
| ESD HBM                            | Human Body Model ESD Protection                                       | 2                            | kV   |
| ESD CDM                            | Charged Device Model ESD Protection                                   | 1                            | kV   |
| ESD MM                             | Machine Model ESD Protection                                          | 200                          | V    |
| V <sub>CC</sub>                    | Supply Voltage Range                                                  | -0.5 to 6.5                  | V    |
| V <sub>I</sub>                     | Input Voltage Range                                                   | -0.5 to 6.5                  | V    |
| V <sub>O</sub>                     | Voltage Applied to Output in High Impedance or I <sub>OFF</sub> State | -0.5 to 6.5                  | V    |
| V <sub>O</sub>                     | Voltage Applied to Output in High or Low State.                       | -0.5 to V <sub>CC</sub> +0.5 | V    |
| I <sub>IK</sub>                    | Input Clamp Current V <sub>I</sub> < 0                                | -50                          | mA   |
| I <sub>OK</sub>                    | Output Clamp Current                                                  | -50                          | mA   |
| I <sub>O</sub>                     | Continuous Output Current                                             | ±50                          | mA   |
| I <sub>CC</sub> , I <sub>GND</sub> | Continuous Current Through V <sub>CC</sub> or GND                     | ±100                         | mA   |
| T <sub>J</sub>                     | Operating Junction Temperature                                        | -40 to +150                  | °C   |
| T <sub>STG</sub>                   | Storage Temperature                                                   | -65 to +150                  | °C   |

- Notes:
- Stresses beyond the absolute maximum may result in immediate failure or reduced reliability. These are stress values and device operation should be within recommend values.
  - Forcing the maximum allowed voltage could cause a condition exceeding the maximum current or conversely forcing the maximum current could cause a condition exceeding the maximum voltage. The ratings of both current and voltage must be maintained within the controlled range.

**Recommended Operating Conditions** (Note 9) (@T<sub>A</sub> = +25°C, unless otherwise specified.)

| Symbol          | Parameter                          |                                             | Min                    | Max                    | Unit |
|-----------------|------------------------------------|---------------------------------------------|------------------------|------------------------|------|
| V <sub>CC</sub> | Operating Voltage                  | Operating                                   | 1.65                   | 5.5                    | V    |
|                 |                                    | Data retention only                         | 1.5                    | —                      | V    |
| V <sub>IH</sub> | High-Level Input Voltage           | V <sub>CC</sub> = 1.65V to 1.95V            | 0.65 x V <sub>CC</sub> | —                      | V    |
|                 |                                    | V <sub>CC</sub> = 2.3V to 2.7V              | 1.7                    | —                      |      |
|                 |                                    | V <sub>CC</sub> = 3V to 3.6V                | 2                      | —                      |      |
|                 |                                    | V <sub>CC</sub> = 4.5V to 5.5V              | 0.7 x V <sub>CC</sub>  | —                      |      |
| V <sub>IL</sub> | Low-Level Input voltage            | V <sub>CC</sub> = 1.65V to 1.95V            | —                      | 0.35 x V <sub>CC</sub> | V    |
|                 |                                    | V <sub>CC</sub> = 2.3V to 2.7V              | —                      | 0.7                    |      |
|                 |                                    | V <sub>CC</sub> = 3V to 3.6V                | —                      | 0.8                    |      |
|                 |                                    | V <sub>CC</sub> = 4.5V to 5.5V              | —                      | 0.3 x V <sub>CC</sub>  |      |
| V <sub>I</sub>  | Input Voltage                      |                                             | 0                      | 5.5                    | V    |
| V <sub>O</sub>  | Output Voltage                     |                                             | 0                      | V <sub>CC</sub>        | V    |
| I <sub>OH</sub> | High-Level Output Current          | V <sub>CC</sub> = 1.65V                     | —                      | -4                     | mA   |
|                 |                                    | V <sub>CC</sub> = 2.3V                      | —                      | -8                     |      |
|                 |                                    | V <sub>CC</sub> = 2.7V                      | —                      | -12                    |      |
|                 |                                    | V <sub>CC</sub> = 3V                        | —                      | -16                    |      |
|                 |                                    | V <sub>CC</sub> = 4.5V                      | —                      | -24                    |      |
| I <sub>OL</sub> | Low-Level Output Current           | V <sub>CC</sub> = 1.65V                     | —                      | 4                      | mA   |
|                 |                                    | V <sub>CC</sub> = 2.3V                      | —                      | 8                      |      |
|                 |                                    | V <sub>CC</sub> = 2.7V                      | —                      | 12                     |      |
|                 |                                    | V <sub>CC</sub> = 3V                        | —                      | 16                     |      |
|                 |                                    | V <sub>CC</sub> = 4.5V                      | —                      | 24                     |      |
| Δt/ΔV           | Input transition Rise or Fall Rate | V <sub>CC</sub> = 1.8V ± 0.15V, 2.5V ± 0.2V | —                      | 20                     | ns/V |
|                 |                                    | V <sub>CC</sub> = 3.3V ± 0.3V               | —                      | 10                     |      |
|                 |                                    | V <sub>CC</sub> = 5V ± 0.5V                 | —                      | 5                      |      |
| T <sub>A</sub>  | Operating Free-Air Temperature     | —                                           | -40                    | +125                   | °C   |

Note: 9. Unused inputs should be held at V<sub>CC</sub> or Ground.

**Electrical Characteristics** (All typical values are at  $V_{CC} = 3.3V$ ,  $T_A = +25^\circ C$ )

| Symbol          | Parameter                  | Test Conditions                                                 | $V_{CC}$      | -40°C to +85°C |           |          | -40°C to +125°C |           | Unit    |
|-----------------|----------------------------|-----------------------------------------------------------------|---------------|----------------|-----------|----------|-----------------|-----------|---------|
|                 |                            |                                                                 |               | Min            | Typ       | Max      | Min             | Max       |         |
| $V_{OH}$        | High-Level Output Voltage  | $I_{OH} = -100\mu A$                                            | 1.65V to 5.5V | $V_{CC} - 0.1$ | —         | —        | $V_{CC} - 0.1$  | —         | V       |
|                 |                            | $I_{OH} = -4mA$                                                 | 1.65V         | 1.2            | —         | —        | 0.95            | —         |         |
|                 |                            | $I_{OH} = -8mA$                                                 | 2.3V          | 1.9            | —         | —        | 1.7             | —         |         |
|                 |                            | $I_{OH} = -12mA$                                                | 2.7V          | 2.2            | —         | —        | 1.9             | —         |         |
|                 |                            | $I_{OH} = -16mA$                                                | 3V            | 2.4            | —         | —        | 2.2             | —         |         |
|                 |                            | $I_{OH} = -24mA$                                                |               | 2.3            | —         | —        | 2.0             | —         |         |
|                 |                            | $I_{OH} = -32mA$                                                | 4.5V          | 3.8            | —         | —        | 3.4             | —         |         |
| $V_{OL}$        | Low-Level Output Voltage   | $I_{OL} = 100\mu A$                                             | 1.65V to 5.5V | —              | —         | 0.1      | —               | 0.1       | V       |
|                 |                            | $I_{OL} = 4mA$                                                  | 1.65V         | —              | —         | 0.45     | —               | 0.7       |         |
|                 |                            | $I_{OL} = 8mA$                                                  | 2.3V          | —              | —         | 0.3      | —               | 0.45      |         |
|                 |                            | $I_{OL} = 12mA$                                                 | 2.7V          | —              | —         | 0.4      | —               | 0.6       |         |
|                 |                            | $I_{OL} = 16mA$                                                 | 3V            | —              | —         | 0.4      | —               | 0.6       |         |
|                 |                            | $I_{OL} = 24mA$                                                 |               | —              | —         | 0.55     | —               | 0.8       |         |
|                 |                            | $I_{OL} = 32mA$                                                 | 4.5V          | —              | —         | 0.55     | —               | .8        |         |
| $I_I$           | Input Current              | $V_I = 5.5V$ or GND                                             | 0 to 5.5V     | —              | $\pm 0.1$ | $\pm 5$  | —               | $\pm 100$ | $\mu A$ |
| $I_{OFF}$       | Power Down Leakage Current | $V_I$ or $V_O = 5.5V$                                           | 0V            | —              | —         | $\pm 10$ | —               | $\pm 200$ | $\mu A$ |
| $I_{CC}$        | Supply Current             | $V_I = 5.5V$ or GND<br>$I_O = 0$                                | 5.5V          | —              | 0.1       | 10       | —               | 200       | $\mu A$ |
| $\Delta I_{CC}$ | Additional Supply Current  | One input at $V_{CC} - 0.6V$<br>Other inputs at $V_{CC}$ or GND | 3V to 5.5V    | —              | —         | 500      | —               | 5000      | $\mu A$ |
| $C_i$           | Input Capacitance          | $V_i = V_{CC} -$ or GND                                         | 3.3V          | —              | 5         | —        | —               | —         | pF      |

**Package Characteristics** (All typical values are at  $V_{CC} = 3.3V$ ,  $T_A = +25^\circ C$ )

| Symbol        | Parameter                              | Test Conditions       | $V_{CC}$  | Min | Typ. | Max | Unit         |
|---------------|----------------------------------------|-----------------------|-----------|-----|------|-----|--------------|
| $\theta_{JA}$ | Thermal Resistance Junction-to-Ambient | SOT25                 | (Note 10) | —   | 204  | —   | $^\circ C/W$ |
|               |                                        | SOT353                |           | —   | 371  | —   |              |
|               |                                        | SOT553                |           | —   | 231  | —   |              |
|               |                                        | X2-DFN0808-4          |           | —   | 400  | —   |              |
|               |                                        | X1-DFN1010-6 (Type B) |           | —   | 435  | —   |              |
|               |                                        | X2-DFN1010-6          |           | —   | 445  | —   |              |
|               |                                        | X2-DFN1409-6          |           | —   | 470  | —   |              |
|               |                                        | X2-DFN1410-6          |           | —   | 460  | —   |              |
| $\theta_{JC}$ | Thermal Resistance Junction-to-Case    | SOT25                 | (Note 10) | —   | 52   | —   | $^\circ C/W$ |
|               |                                        | SOT353                |           | —   | 143  | —   |              |
|               |                                        | SOT553                |           | —   | 105  | —   |              |
|               |                                        | X2-DFN0808-4          |           | —   | 225  | —   |              |
|               |                                        | X1-DFN1010-6 (Type B) |           | —   | 250  | —   |              |
|               |                                        | X2-DFN1010-6          |           | —   | 250  | —   |              |
|               |                                        | X2-DFN1409-6          |           | —   | 275  | —   |              |
|               |                                        | X2-DFN1410-6          |           | —   | 265  | —   |              |

Note: 10. Test condition for each of the 8 package types: Device mounted on FR-4 substrate PC board, 2oz copper, with minimum recommended pad layout.

## Switching Characteristics

Figure 1 Typical Values at  $T_A = +25^\circ\text{C}$  and nominal voltages 1.8V, 2.5V, 2.7V, 3.3V, and 5.0V.


| Parameter | From Input | To Output | $V_{CC}$         | $T_A = -40^\circ\text{C to } +85^\circ\text{C}$ |      |     | $T_A = -40^\circ\text{C to } +125^\circ\text{C}$ |      | Unit |
|-----------|------------|-----------|------------------|-------------------------------------------------|------|-----|--------------------------------------------------|------|------|
|           |            |           |                  | Min                                             | Typ. | Max | Min                                              | Max  |      |
| $t_{pd}$  | A or B     | Y         | 1.8V $\pm$ 0.15V | 1.0                                             | 3.1  | 8.0 | 1.0                                              | 10.5 | ns   |
|           |            |           | 2.5V $\pm$ 0.2V  | 0.5                                             | 2.1  | 5.5 | 0.5                                              | 7.0  |      |
|           |            |           | 2.7V             | 0.5                                             | 2.5  | 5.5 | 0.5                                              | 7.0  |      |
|           |            |           | 3.3V $\pm$ 0.3V  | 0.5                                             | 2.1  | 4.5 | 0.5                                              | 6.0  |      |
|           |            |           | 5.0V $\pm$ 0.5V  | 0.5                                             | 1.7  | 4.0 | 0.5                                              | 5.5  |      |

## Operating Characteristics

$T_A = +25^\circ\text{C}$

| Parameter |                               | Test Conditions    | $V_{CC} = 1.8\text{V}$ | $V_{CC} = 2.5\text{V}$ | $V_{CC} = 3.3\text{V}$ | $V_{CC} = 5\text{V}$ | Unit |
|-----------|-------------------------------|--------------------|------------------------|------------------------|------------------------|----------------------|------|
|           |                               |                    | Typ                    | Typ                    | Typ                    | Typ                  |      |
| $C_{pd}$  | Power Dissipation Capacitance | $f = 10\text{MHz}$ | 20                     | 20                     | 21                     | 22                   | pF   |

## Parameter Measurement Information

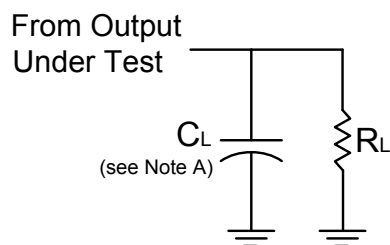

| $V_{CC}$         | Inputs   |              | $V_M$      | $C_L$ | $R_L$        |
|------------------|----------|--------------|------------|-------|--------------|
|                  | $V_I$    | $t_r/t_f$    |            |       |              |
| $1.8V \pm 0.15V$ | $V_{CC}$ | $\leq 2ns$   | $V_{CC}/2$ | 30pF  | 1k $\Omega$  |
| $2.5V \pm 0.2V$  | $V_{CC}$ | $\leq 2ns$   | $V_{CC}/2$ | 30pF  | 500 $\Omega$ |
| 2.7V             | $V_{CC}$ | $\leq 2.5ns$ | 1.5V       | 50pF  | 500 $\Omega$ |
| $3.3V \pm 0.3V$  | 3.0V     | $\leq 2.5ns$ | 1.5V       | 50pF  | 500 $\Omega$ |
| $5.0V \pm 0.5V$  | $V_{CC}$ | $\leq 2.5ns$ | $V_{CC}/2$ | 50pF  | 500 $\Omega$ |



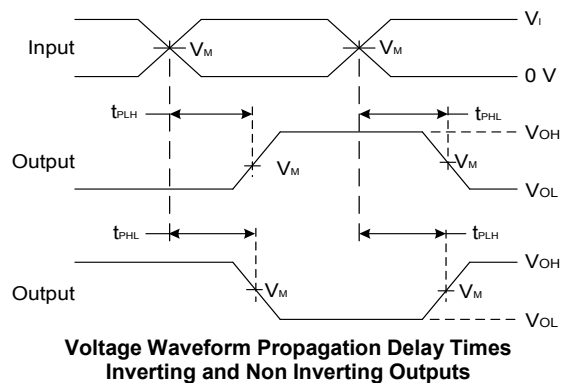


Figure 1 Load Circuit and Voltage Waveforms

- Notes:
- A. Includes test lead and test apparatus capacitance.
  - B. All pulses are supplied at pulse repetition rate  $\leq 10MHz$ .
  - C. Inputs are measured separately one transition per measurement.
  - D.  $t_{PLH}$  and  $t_{PHL}$  are the same as  $t_{PD}$ .


## Marking Information

### (1) SOT25, SOT353 and SOT553

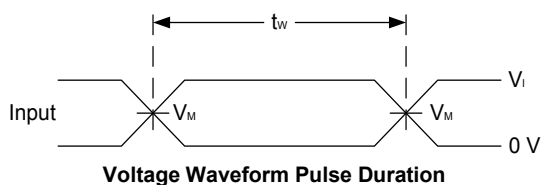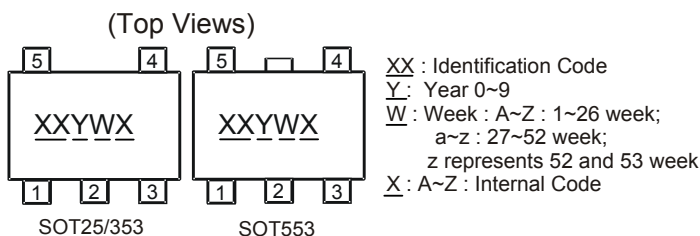

| Part Number   | Package | Identification Code |
|---------------|---------|---------------------|
| 74LVC1G32W5-7 | SOT25   | UW                  |
| 74LVC1G32SE-7 | SOT353  | UW                  |
| 74LVC1G32Z-7  | SOT553  | UW                  |

### (2) DFN Packages

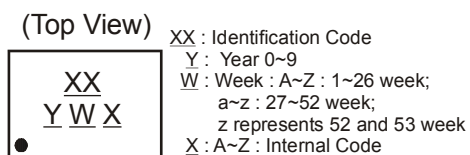


| Part Number    | Package               | Identification Code |
|----------------|-----------------------|---------------------|
| 74LVC1G32FS3-7 | X2-DFN0808-4          | WW                  |
| 74LVC1G32FW5-7 | X1-DFN1010-6 (Type B) | VP                  |
| 74LVC1G32FW4-7 | X2-DFN1010-6          | UW                  |
| 74LVC1G32FX4-7 | X2-DFN1409-6          | MJ                  |
| 74LVC1G32FZ4-7 | X2-DFN1410-6          | UW                  |

## Package Outline Dimensions

Please see <http://www.diodes.com/package-outlines.html> for the latest version


### SOT25

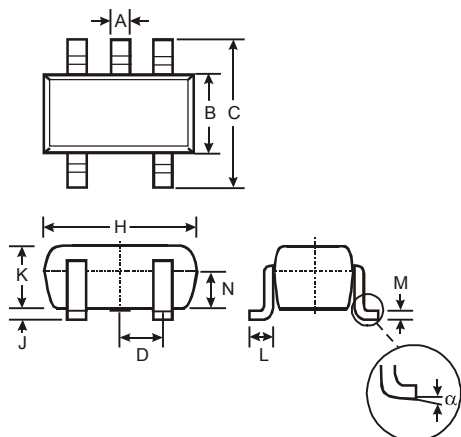

| SOT25                |       |      |      |
|----------------------|-------|------|------|
| Dim                  | Min   | Max  | Typ  |
| A                    | 0.35  | 0.50 | 0.38 |
| B                    | 1.50  | 1.70 | 1.60 |
| C                    | 2.70  | 3.00 | 2.80 |
| D                    | -     | -    | 0.95 |
| H                    | 2.90  | 3.10 | 3.00 |
| J                    | 0.013 | 0.10 | 0.05 |
| K                    | 1.00  | 1.30 | 1.10 |
| L                    | 0.35  | 0.55 | 0.40 |
| M                    | 0.10  | 0.20 | 0.15 |
| N                    | 0.70  | 0.80 | 0.75 |
| $\alpha$             | 0°    | 8°   | -    |
| All Dimensions in mm |       |      |      |

## Suggested Pad Layout

### SOT25




| Dimensions | Value |
|------------|-------|
| Z          | 3.20  |
| G          | 1.60  |
| X          | 0.55  |
| Y          | 0.80  |
| C1         | 2.40  |
| C2         | 0.95  |

SOT25 Package Information  
Rev. 2017-04-11

## Package Outline Dimensions

Please see <http://www.diodes.com/package-outlines.html> for the latest version


SOT353

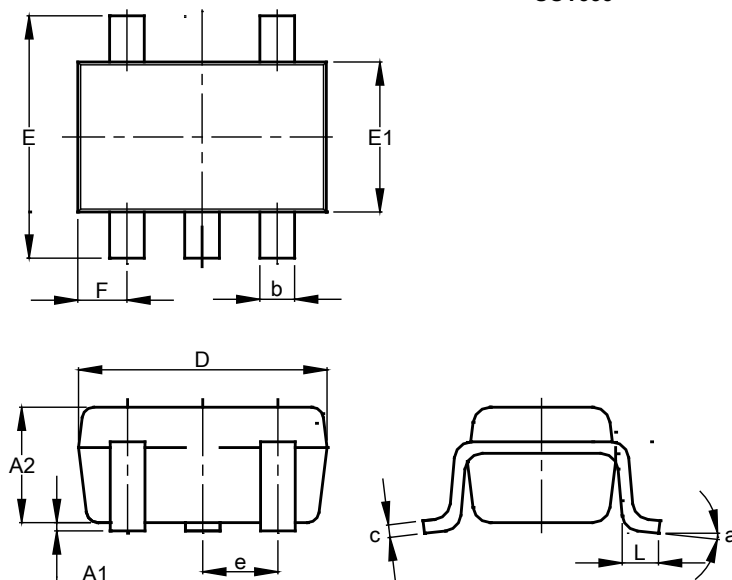

| SOT353               |           |      |       |
|----------------------|-----------|------|-------|
| Dim                  | Min       | Max  | Typ   |
| A1                   | 0.00      | 0.10 | 0.05  |
| A2                   | 0.90      | 1.00 | 0.95  |
| b                    | 0.10      | 0.30 | 0.25  |
| c                    | 0.10      | 0.22 | 0.11  |
| D                    | 1.80      | 2.20 | 2.15  |
| E                    | 2.00      | 2.20 | 2.10  |
| E1                   | 1.15      | 1.35 | 1.30  |
| e                    | 0.650 BSC |      |       |
| F                    | 0.40      | 0.45 | 0.425 |
| L                    | 0.25      | 0.40 | 0.30  |
| a                    | 0°        | 8°   | --    |
| All Dimensions in mm |           |      |       |

## Suggested Pad Layout

SOT353

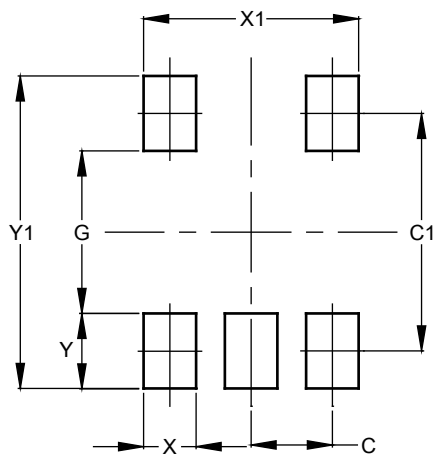


| Dimensions | Value (in mm) |
|------------|---------------|
| C          | 0.650         |
| C1         | 1.900         |
| G          | 1.300         |
| X          | 0.420         |
| X1         | 1.720         |
| Y          | 0.600         |
| Y1         | 2.500         |

SOT353 Package Information  
Rev. 2018-01-16

## Package Outline Dimensions

Please see <http://www.diodes.com/package-outlines.html> for the latest version


### SOT553

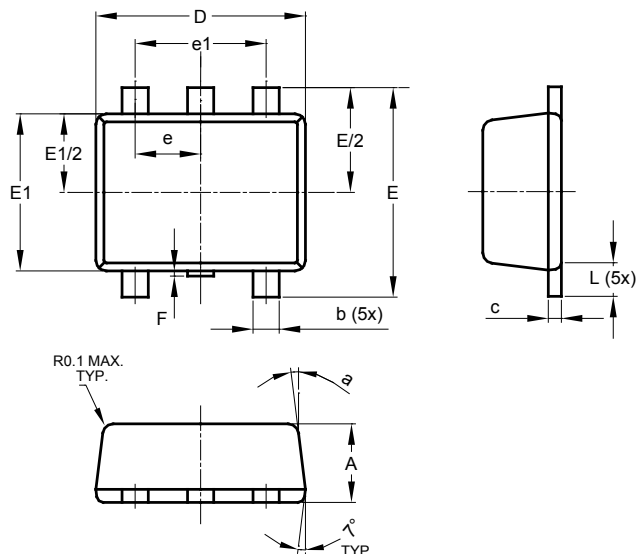

| SOT553               |          |      |      |
|----------------------|----------|------|------|
| Dim                  | Min      | Max  | Typ  |
| A                    | 0.55     | 0.62 | 0.60 |
| b                    | 0.15     | 0.30 | 0.20 |
| c                    | 0.10     | 0.18 | 0.15 |
| D                    | 1.50     | 1.70 | 1.60 |
| E                    | 1.55     | 1.70 | 1.60 |
| E1                   | 1.10     | 1.25 | 1.20 |
| e                    | 0.50 BSC |      |      |
| e1                   | 1.00 BSC |      |      |
| F                    | 0.00     | 0.10 | —    |
| L                    | 0.10     | 0.30 | 0.20 |
| a                    | 6°       | 8°   | 7°   |
| All Dimensions in mm |          |      |      |

## Suggested Pad Layout

### SOT553




| Dimensions | Value |
|------------|-------|
| Z          | 2.2   |
| G          | 1.2   |
| X          | 0.375 |
| Y          | 0.5   |
| C1         | 1.7   |
| C2         | 0.5   |

SOT553 Package Information  
Rev. 2015-06-11

## Package Outline Dimensions

Please see <http://www.diodes.com/package-outlines.html> for the latest version.


X2-DFN0808-4

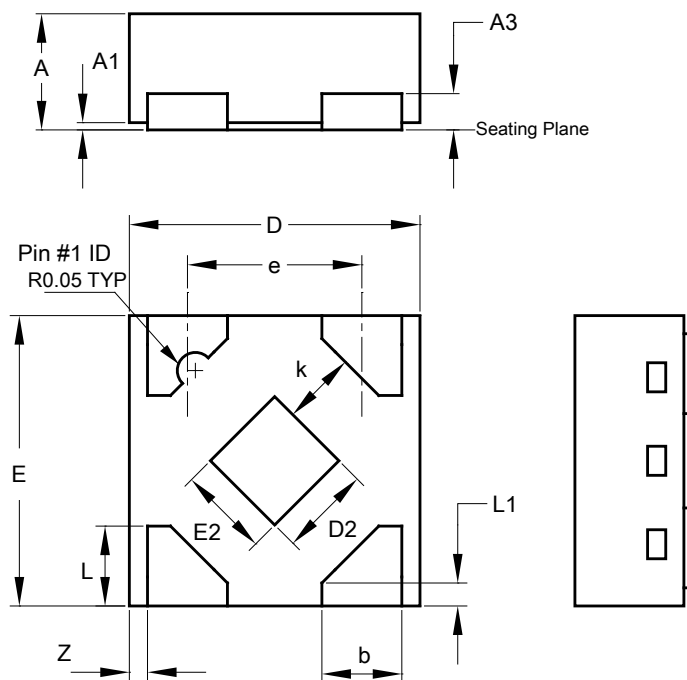

| X2-DFN0808-4         |      |      |      |
|----------------------|------|------|------|
| Dim                  | Min  | Max  | Typ  |
| A                    | 0.25 | 0.35 | 0.30 |
| A1                   | 0    | 0.04 | 0.02 |
| A3                   | -    | -    | 0.13 |
| b                    | 0.17 | 0.27 | 0.22 |
| D                    | 0.75 | 0.85 | 0.80 |
| D2                   | 0.15 | 0.35 | 0.25 |
| E                    | 0.75 | 0.85 | 0.80 |
| E2                   | 0.15 | 0.35 | 0.25 |
| e                    | -    | -    | 0.48 |
| k                    | 0.20 | -    | -    |
| L                    | 0.17 | 0.27 | 0.22 |
| L1                   | 0.02 | 0.12 | 0.07 |
| z                    | -    | -    | 0.05 |
| All Dimensions in mm |      |      |      |

## Suggested Pad Layout

X2-DFN0808-4

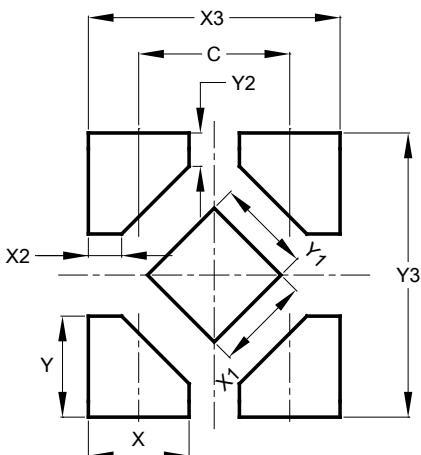


| Dimensions | Value |
|------------|-------|
| C          | 0.480 |
| X          | 0.320 |
| X1         | 0.300 |
| X2         | 0.106 |
| X3         | 0.800 |
| Y          | 0.320 |
| Y1         | 0.300 |
| Y2         | 0.106 |
| Y3         | 0.900 |

X2-DFN0808-4 Package Information  
Rev. 2015-06-05

## Package Outline Dimensions

Please see <http://www.diodes.com/package-outlines.html> for the latest version.


X1-DFN1010-6 (Type B)

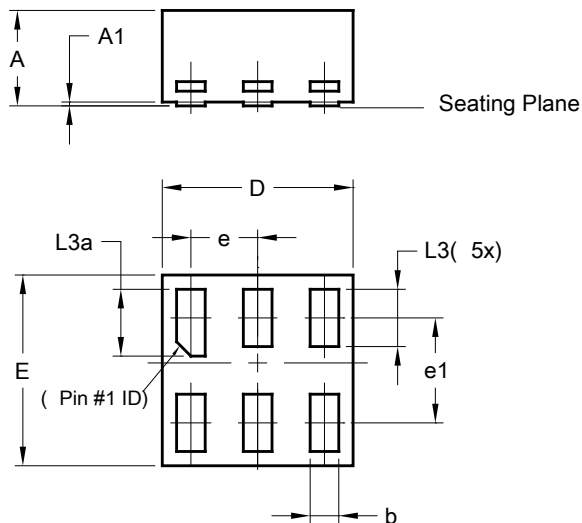

| X1-DFN1010-6<br>(Type B) |          |       |      |
|--------------------------|----------|-------|------|
| Dim                      | Min      | Max   | Typ  |
| A                        | -        | 0.50  | 0.39 |
| A1                       | -        | 0.04  | -    |
| b                        | 0.12     | 0.20  | 0.15 |
| D                        | 0.95     | 1.050 | 1.00 |
| E                        | 0.95     | 1.050 | 1.00 |
| e                        | 0.35 BSC |       |      |
| e1                       | 0.55 BSC |       |      |
| L3                       | 0.27     | 0.30  | 0.30 |
| L3a                      | 0.32     | 0.40  | 0.35 |
| All Dimensions in mm     |          |       |      |

## Suggested Pad Layout

X1-DFN1010-6 (Type B)

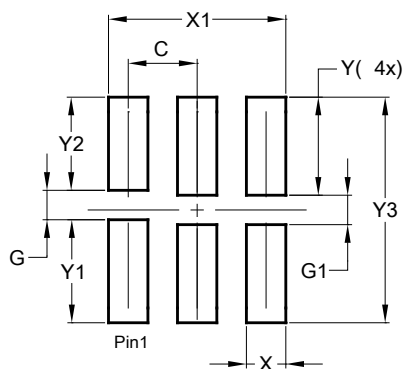


| Dimensions | Value<br>(in mm) |
|------------|------------------|
| C          | 0.350            |
| G          | 0.150            |
| G1         | 0.150            |
| X          | 0.200            |
| X1         | 0.900            |
| Y          | 0.500            |
| Y1         | 0.525            |
| Y2         | 0.475            |
| Y3         | 1.150            |

X1-DFN1010-6 (Type B) Package Information  
Rev. 2015-06-05

## Package Outline Dimensions

Please see <http://www.diodes.com/package-outlines.html> for the latest version.


### X2-DFN1010-6

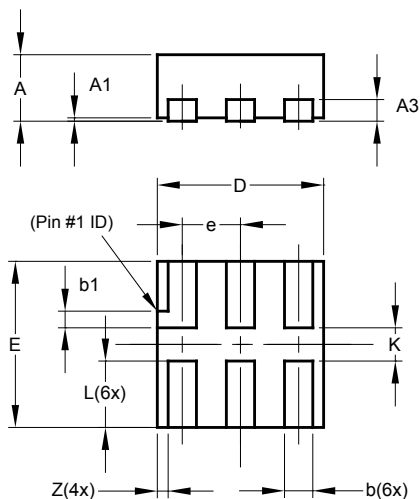

| X2-DFN1010-6         |      |      |       |
|----------------------|------|------|-------|
| Dim                  | Min  | Max  | Typ   |
| A                    | —    | 0.40 | 0.39  |
| A1                   | 0.00 | 0.05 | 0.02  |
| A3                   | —    | —    | 0.13  |
| b                    | 0.14 | 0.20 | 0.17  |
| b1                   | 0.05 | 0.15 | 0.10  |
| D                    | 0.95 | 1.05 | 1.00  |
| E                    | 0.95 | 1.05 | 1.00  |
| e                    | —    | —    | 0.35  |
| L                    | 0.35 | 0.45 | 0.40  |
| K                    | 0.15 | —    | —     |
| Z                    | —    | —    | 0.065 |
| All Dimensions in mm |      |      |       |

## Suggested Pad Layout

### X2-DFN1010-6

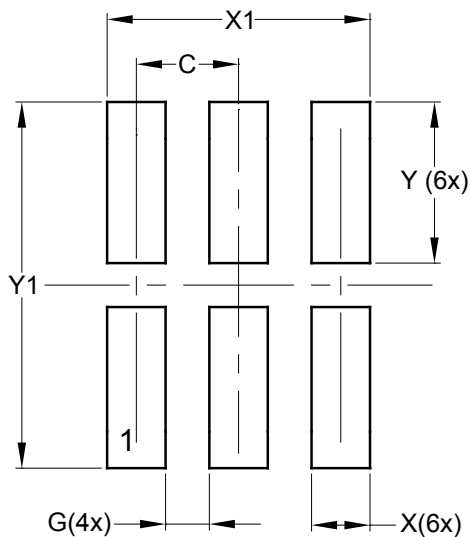


| Dimensions | Value (in mm) |
|------------|---------------|
| C          | 0.350         |
| G          | 0.150         |
| X          | 0.200         |
| X1         | 0.900         |
| Y          | 0.550         |
| Y1         | 1.250         |

X2-DFN1010-6 Package Information  
Rev. 2018-07-17

## Package Outline Dimensions

Please see <http://www.diodes.com/package-outlines.html> for the latest version.


### X2-DFN1409-6 CHIP SCALE ALTERNATIVE

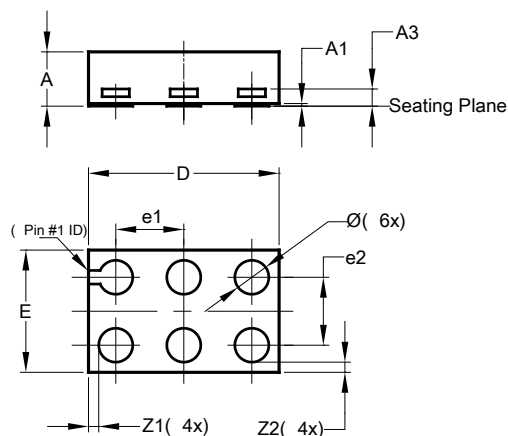

| X2-DFN1409-6         |      |      |       |
|----------------------|------|------|-------|
| Dim                  | Min  | Max  | Typ   |
| A                    | -    | 0.40 | 0.39  |
| A1                   | 0    | 0.05 | 0.02  |
| A3                   | -    | -    | 0.13  |
| Ø                    | 0.20 | 0.30 | 0.25  |
| D                    | 1.35 | 1.45 | 1.40  |
| E                    | 0.85 | 0.95 | 0.90  |
| e1                   | -    | -    | 0.50  |
| e2                   | -    | -    | 0.50  |
| Z1                   | -    | -    | 0.075 |
| Z2                   | -    | -    | 0.075 |
| All Dimensions in mm |      |      |       |

## Suggested Pad Layout

### X2-DFN1409-6 CHIP SCALE ALTERNATIVE

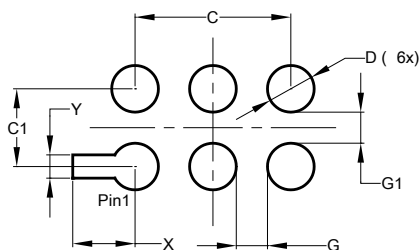


| Dimensions | Value (in mm) |
|------------|---------------|
| C          | 1.000         |
| C1         | 0.500         |
| D          | 0.300         |
| G          | 0.200         |
| G1         | 0.200         |
| X          | 0.400         |
| Y          | 0.150         |

X2-DFN1409-6 Package Information  
Rev. 2018-07-17

## Package Outline Dimensions

Please see <http://www.diodes.com/package-outlines.html> for the latest version.


X2-DFN1410-6

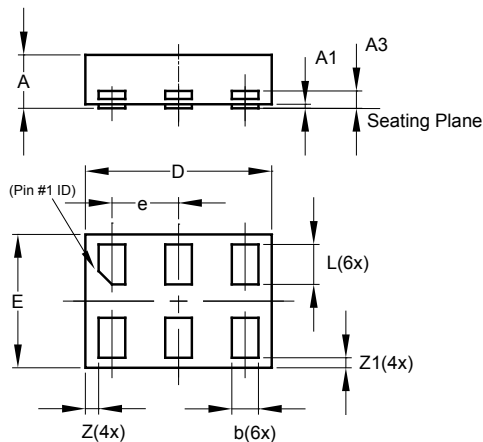

| X2-DFN1410-6         |       |       |       |
|----------------------|-------|-------|-------|
| Dim                  | Min   | Max   | Typ   |
| A                    | —     | 0.40  | 0.39  |
| A1                   | 0.00  | 0.05  | 0.02  |
| A3                   | —     | —     | 0.13  |
| b                    | 0.15  | 0.25  | 0.20  |
| D                    | 1.35  | 1.45  | 1.40  |
| E                    | 0.95  | 1.05  | 1.00  |
| e                    | —     | —     | 0.50  |
| L                    | 0.25  | 0.35  | 0.30  |
| Z                    | —     | —     | 0.10  |
| Z1                   | 0.045 | 0.105 | 0.075 |
| All Dimensions in mm |       |       |       |

## Suggested Pad Layout

X2-DFN1410-6



| Dimensions | Value (in mm) |
|------------|---------------|
| C          | 0.500         |
| G          | 0.250         |
| X          | 0.250         |
| X1         | 1.250         |
| Y          | 0.525         |
| Y1         | 1.250         |

X2-DFN1410-6 Package Information  
Rev. 2015-06-08

#### IMPORTANT NOTICE

DIODES INCORPORATED MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARDS TO THIS DOCUMENT, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION).

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein. Diodes Incorporated does not assume any liability arising out of the application or use of this document or any product described herein; neither does Diodes Incorporated convey any license under its patent or trademark rights, nor the rights of others. Any Customer or user of this document or products described herein in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on Diodes Incorporated website, harmless against all damages.

Diodes Incorporated does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel.

Should Customers purchase or use Diodes Incorporated products for any unintended or unauthorized application, Customers shall indemnify and hold Diodes Incorporated and its representatives harmless against all claims, damages, expenses, and attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized application.

Products described herein may be covered by one or more United States, international or foreign patents pending. Product names and markings noted herein may also be covered by one or more United States, international or foreign trademarks.

This document is written in English but may be translated into multiple languages for reference. Only the English version of this document is the final and determinative format released by Diodes Incorporated.

#### LIFE SUPPORT

Diodes Incorporated products are specifically not authorized for use as critical components in life support devices or systems without the express written approval of the Chief Executive Officer of Diodes Incorporated. As used herein:

A. Life support devices or systems are devices or systems which:

1. are intended to implant into the body, or
2. support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in significant injury to the user.

B. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or to affect its safety or effectiveness.

Customers represent that they have all necessary expertise in the safety and regulatory ramifications of their life support devices or systems, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of Diodes Incorporated products in such safety-critical, life support devices or systems, notwithstanding any devices- or systems-related information or support that may be provided by Diodes Incorporated. Further, Customers must fully indemnify Diodes Incorporated and its representatives against any damages arising out of the use of Diodes Incorporated products in such safety-critical, life support devices or systems.

Copyright © 2020, Diodes Incorporated

[www.diodes.com](http://www.diodes.com)