



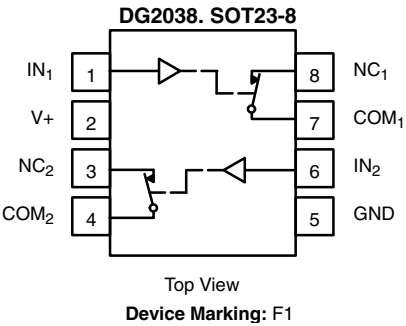



DG2037/2038/2039

Vishay Siliconix

FUNCTIONAL BLOCK DIAGRAM AND PIN CONFIGURATION - DG2038/DG2039

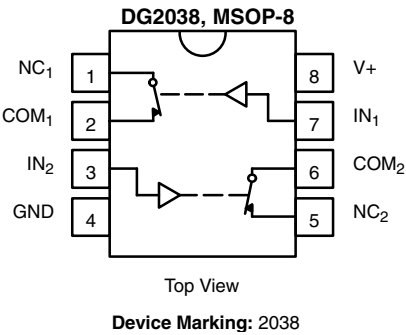

| TRUTH TABLE - DG2038 |        |
|----------------------|--------|
| Logic                | Switch |
| 0                    | On     |
| 1                    | Off    |

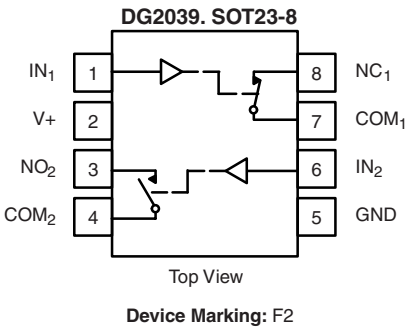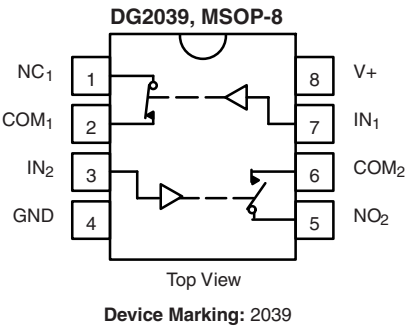

| TRUTH TABLE - DG2039 |          |          |
|----------------------|----------|----------|
| Logic                | Switch-1 | Switch-2 |
| 0                    | On       | Off      |
| 1                    | Off      | On       |

| ORDERING INFORMATION |         |             |
|----------------------|---------|-------------|
| Temp Range           | Package | Part Number |
| - 40 to 85 °C        | MSOP-8  | DG2037DQ    |
|                      |         | DG2038DQ    |
|                      |         | DG2039DQ    |
|                      | SOT23-8 | DG2037DS    |
|                      |         | DG2038DS    |
|                      |         | DG2039DS    |

**ABSOLUTE MAXIMUM RATINGS**

| Parameter                                      |                      | Limit               | Unit |
|------------------------------------------------|----------------------|---------------------|------|
| Referenced V+ to GND                           |                      | - 0.3 to 6.0        | V    |
| IN, COM, NC, NO <sup>a</sup>                   |                      | - 0.3 to (V+ + 0.3) |      |
| Continuous Current (Any Terminal)              |                      | ± 50                | mA   |
| Peak Current (Pulsed at 1 ms, 10 % duty cycle) |                      | ± 200               |      |
| Storage Temperature (D Suffix)                 |                      | - 65 to 150         | °C   |
| Power Dissipation (Packages) <sup>b</sup>      | MSOP-8 <sup>c</sup>  | 320                 | mW   |
|                                                | SOT23-8 <sup>c</sup> | 515                 |      |

Notes:

a. Signals on NC, NO, or COM or IN exceeding V+ will be clamped by internal diodes. Limit forward diode current to maximum current ratings.

b. All leads welded or soldered to PC Board.

c. Derate 6.5 mW/°C above 25 °C.

**SPECIFICATIONS (V+ = 3.0 V)**

| Parameter                             | Symbol                                                | Test Conditions<br>Otherwise Unless Specified<br>V+ = 3 V, ± 10 %, V <sub>IN</sub> = 0.4 or 1.5 V <sup>e</sup> | Temp <sup>a</sup> | Limits<br>- 40 to 85 °C |                  |                  | Unit |
|---------------------------------------|-------------------------------------------------------|----------------------------------------------------------------------------------------------------------------|-------------------|-------------------------|------------------|------------------|------|
|                                       |                                                       |                                                                                                                |                   | Min <sup>b</sup>        | Typ <sup>c</sup> | Max <sup>b</sup> |      |
| Analog Switch                         |                                                       |                                                                                                                |                   |                         |                  |                  |      |
| Analog Signal Range <sup>d</sup>      | V <sub>NO</sub> , V <sub>NC</sub><br>V <sub>COM</sub> |                                                                                                                | Full              | 0                       |                  | V+               | V    |
| On-Resistance                         | r <sub>ON</sub>                                       | V+ = 2.7 V, V <sub>COM</sub> = 1.5 V, I <sub>NO</sub> , I <sub>NC</sub> = 10 mA                                | Room<br>Full      |                         | 3                | 6<br>7           | Ω    |
| r <sub>ON</sub> Flatness <sup>d</sup> | r <sub>ON</sub><br>Flatness                           | V+ = 2.7 V, V <sub>COM</sub> = 1.5 to V+, I <sub>NO</sub> , I <sub>NC</sub> = 10 mA                            | Room              |                         | 0.5              |                  |      |
| r <sub>ON</sub> Match <sup>d</sup>    | r <sub>ON</sub><br>Match                              | V+ = 2.7 V, V <sub>D</sub> = 1.5 to V+, I <sub>D</sub> = 10 mA                                                 | Room              |                         | 0.3              |                  |      |
| Switch Off Leakage Current            | I <sub>NO(off)</sub><br>I <sub>NC(off)</sub>          | V+ = 3.3 V<br>V <sub>NO</sub> , V <sub>NC</sub> = 1 V/3 V, V <sub>COM</sub> = 3 V/1 V                          | Room<br>Full      | - 1<br>- 10             |                  | 1<br>10          | nA   |
|                                       | I <sub>COM(off)</sub>                                 |                                                                                                                | Room<br>Full      | - 1<br>- 10             |                  | 1<br>10          |      |
| Channel-On Leakage Current            | I <sub>COM(on)</sub>                                  | V+ = 3.3 V, V <sub>NO</sub> , V <sub>NC</sub> = V <sub>COM</sub> = 1 V/3 V                                     | Room<br>Full      | - 1<br>- 10             |                  | 1<br>10          |      |
| Digital Control                       |                                                       |                                                                                                                |                   |                         |                  |                  |      |
| Input High Voltage                    | V <sub>INH</sub>                                      |                                                                                                                | Full              | 1.5                     |                  |                  | V    |
| Input Low Voltage                     | V <sub>INL</sub>                                      |                                                                                                                | Full              |                         |                  | 0.4              |      |
| Input Capacitance <sup>d</sup>        | C <sub>in</sub>                                       | f = 1 MHz                                                                                                      | Full              |                         | 8                |                  | pF   |
| Input Current                         | I <sub>INL</sub> or I <sub>INH</sub>                  | V <sub>IN</sub> = 0 or V+                                                                                      | Full              | - 1                     |                  | 1                | μA   |
| Dynamic Characteristics               |                                                       |                                                                                                                |                   |                         |                  |                  |      |
| Turn-On Time                          | t <sub>ON</sub>                                       | V <sub>NO</sub> or V <sub>NC</sub> = 2.0 V, R <sub>L</sub> = 300 Ω, C <sub>L</sub> = 35 pF<br>Figures 1 and 2  | Room<br>Full      |                         | 22               | 35<br>40         | ns   |
| Turn-Off Time                         | t <sub>OFF</sub>                                      |                                                                                                                | Room<br>Full      |                         | 17               | 31<br>35         |      |
| Charge Injection <sup>d</sup>         | Q <sub>INJ</sub>                                      | C <sub>L</sub> = 1 nF, V <sub>GEN</sub> = 0 V, R <sub>GEN</sub> = 0 Ω, Figure 3                                | Room              |                         | 1                |                  | pC   |
| Off-Isolation <sup>d</sup>            | OIRR                                                  | R <sub>L</sub> = 50 Ω, C <sub>L</sub> = 5 pF, f = 1 MHz                                                        | Room              |                         | - 61             |                  | dB   |
| Crosstalk <sup>d</sup>                | X <sub>TALK</sub>                                     |                                                                                                                | Room              |                         | - 67             |                  |      |
| Source-Off Capacitance <sup>d</sup>   | C <sub>NC/NO(off)</sub>                               | V <sub>IN</sub> = 0 or V+, f = 1 MHz                                                                           | Room              |                         | 17               |                  | pF   |
| Drain-Off Capacitance <sup>d</sup>    | C <sub>COM(off)</sub>                                 |                                                                                                                | Room              |                         | 19               |                  |      |
| Channel-On Capacitance <sup>d</sup>   | C <sub>ON</sub>                                       |                                                                                                                | Room              |                         | 35               |                  |      |
| Power Supply                          |                                                       |                                                                                                                |                   |                         |                  |                  |      |
| Power Supply Range                    | V+                                                    |                                                                                                                |                   | 2.7                     |                  | 3.3              | V    |
| Power Supply Current                  | I+                                                    | V <sub>IN</sub> = 0 or V+                                                                                      |                   |                         | 0.02             | 1.0              | μA   |
| Power Consumption                     | P <sub>C</sub>                                        |                                                                                                                |                   |                         |                  | 3.3              | μW   |









| SPECIFICATIONS (V+ = 5.0 V)         |                      |                                                                                                    |                   |                         |                  |                  |      |
|-------------------------------------|----------------------|----------------------------------------------------------------------------------------------------|-------------------|-------------------------|------------------|------------------|------|
| Parameter                           | Symbol               | Test Conditions<br>Otherwise Unless Specified<br>V+ = 5 V, ± 10 %, VIN = 0.8 or 2.4 V <sup>e</sup> | Temp <sup>a</sup> | Limits<br>- 40 to 85 °C |                  |                  | Unit |
|                                     |                      |                                                                                                    |                   | Min <sup>b</sup>        | Typ <sup>c</sup> | Max <sup>b</sup> |      |
| Analog Switch                       |                      |                                                                                                    |                   |                         |                  |                  |      |
| Analog Signal Range <sup>d</sup>    | VNO, VNC<br>VCOM     |                                                                                                    | Full              | 0                       |                  | V+               | V    |
| On-Resistance                       | rON                  | V+ = 4.5 V, VCOM = 2.5 V, INO, INC = 10 mA                                                         | Room<br>Full      |                         | 2.5<br>1.6       | 5<br>6           | Ω    |
| rON Flatness <sup>d</sup>           | rON<br>Flatness      | V+ = 4.5 V, VCOM = 2.5 to V+, INO, INC = 10 mA                                                     | Room              |                         | 0.4              |                  |      |
| rON Match <sup>d</sup>              | rON<br>Match         | V+ = 4.5 V, ID = 10 mA, VCOM = 2.5 V                                                               | Room              |                         | 0.2              |                  |      |
| Switch Off Leakage Current          | INO(off)<br>INC(off) | V+ = 5.5 V<br>VNO, VNC = 1 V/4.5 V, VCOM = 4.5 V/1 V                                               | Room<br>Full      | - 1<br>- 10             |                  | 1<br>10          | nA   |
|                                     | ICOM(off)            |                                                                                                    | Room<br>Full      | - 1<br>- 10             |                  | 1<br>10          |      |
| Channel-On Leakage Current          | ICOM(on)             | V+ = 5.5 V<br>VNO, VNC = VCOM = 1 V/4.5 V                                                          | Room<br>Full      | - 1<br>- 10             |                  | 1<br>10          |      |
| Digital Control                     |                      |                                                                                                    |                   |                         |                  |                  |      |
| Input High Voltage                  | VINH                 |                                                                                                    | Full              | 2.4                     |                  |                  | V    |
| Input Low Voltage                   | VINL                 |                                                                                                    | Full              |                         |                  | 0.8              |      |
| Input Capacitance                   | Cin                  | f = 1 MHz                                                                                          | Full              |                         | 8                |                  | pF   |
| Input Current                       | IINL or IINH         | VIN = 0 or V+                                                                                      | Full              | - 1                     |                  | 1                | μA   |
| Dynamic Characteristics             |                      |                                                                                                    |                   |                         |                  |                  |      |
| Turn-On Time <sup>d</sup>           | tON                  | VNO or VNC = 3 V, RL = 300 Ω, CL = 35 pF<br>Figures 1 and 2                                        | Room<br>Full      |                         | 19               | 30<br>35         | ns   |
| Turn-Off Time <sup>d</sup>          | tOFF                 |                                                                                                    | Room<br>Full      |                         | 12               | 22<br>30         |      |
| Charge Injection <sup>d</sup>       | QINJ                 | CL = 1 nF, VGEN = 0 V, RGEN = 0 Ω, Figure 3                                                        | Room              |                         | 1                |                  | pC   |
| Off-Isolation <sup>d</sup>          | OIRR                 | RL = 50 Ω, CL = 5 pF, f = 1 MHz                                                                    | Room              |                         | - 61             |                  | dB   |
| Crosstalk <sup>d</sup>              | XTALK                |                                                                                                    | Room              |                         | - 67             |                  |      |
| Source-Off Capacitance <sup>d</sup> | CNC/NO(off)          | VIN = 0 or V+, f = 1 MHz                                                                           | Room              |                         | 15               |                  | pF   |
| Drain-Off Capacitance <sup>d</sup>  | CCOM(off)            |                                                                                                    | Room              |                         | 17               |                  |      |
| Channel-On Capacitance <sup>d</sup> | CON                  |                                                                                                    | Room              |                         | 35               |                  |      |
| Power Supply                        |                      |                                                                                                    |                   |                         |                  |                  |      |
| Power Supply Range                  | V+                   | VIN = 0 or V+                                                                                      |                   | 4.5                     |                  | 5.5              | V    |
| Power Supply Current                | I+                   |                                                                                                    |                   |                         | 0.02             | 1.0              | μA   |
| Power Consumption                   | PC                   |                                                                                                    |                   |                         |                  | 5.5              | μW   |





## Notes:

- Room = 25 °C, Full = as determined by the operating suffix.
- The algebraic convention whereby the most negative value is a minimum and the most positive a maximum, is used in this data sheet.
- Typical values are for design aid only, not guaranteed nor subject to production testing.
- Guarantee by design, nor subjected to production test.
- V<sub>IN</sub> = input voltage to perform proper function.
- Not production tested.

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

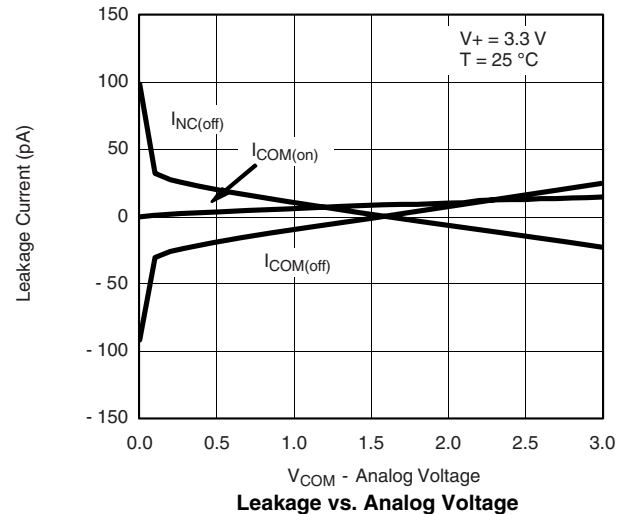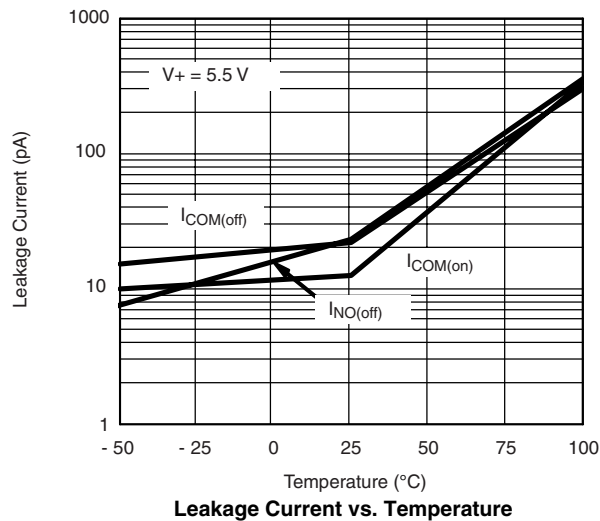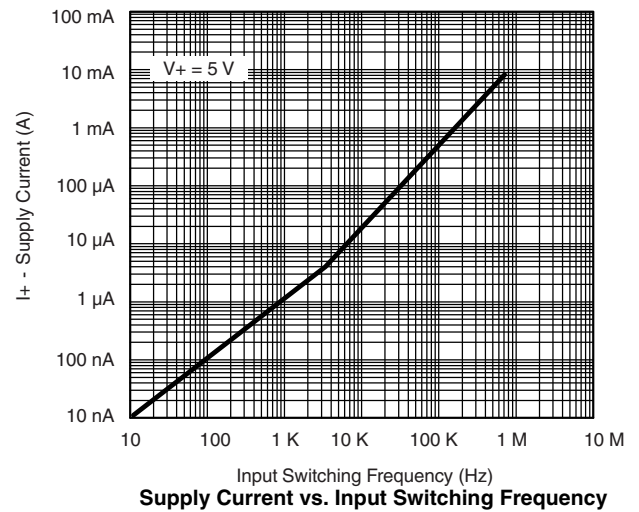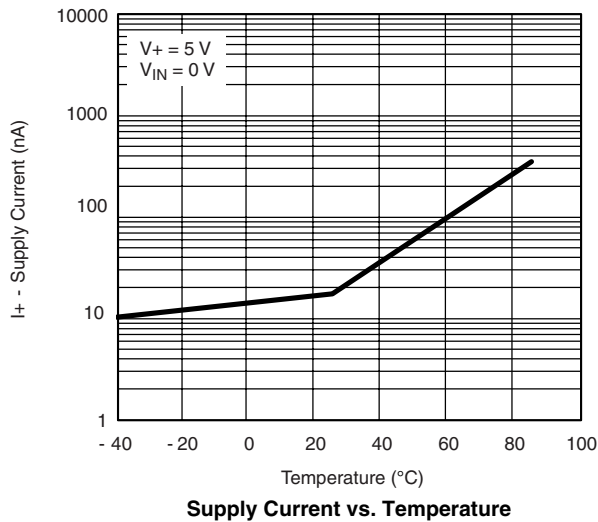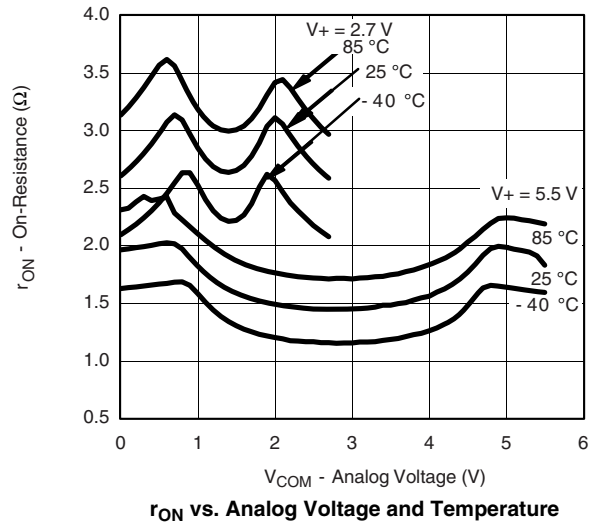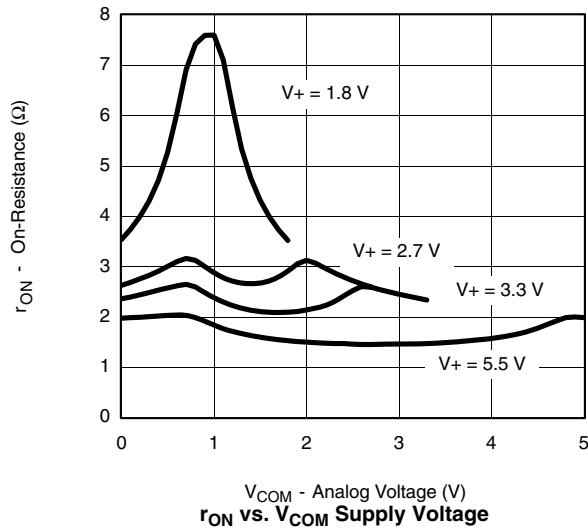**TYPICAL CHARACTERISTICS** 25 °C, unless otherwise noted

Vishay Siliconix

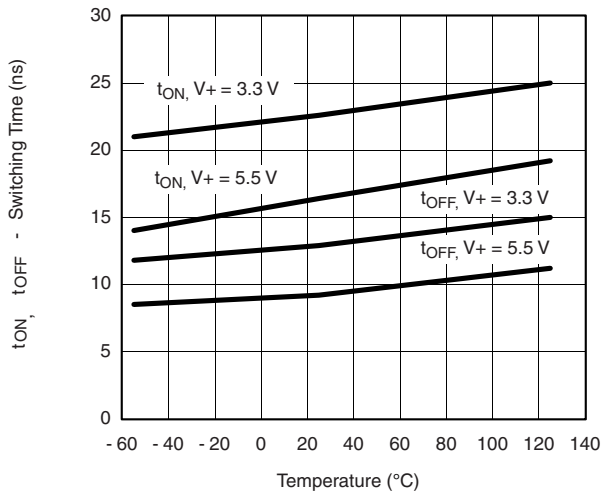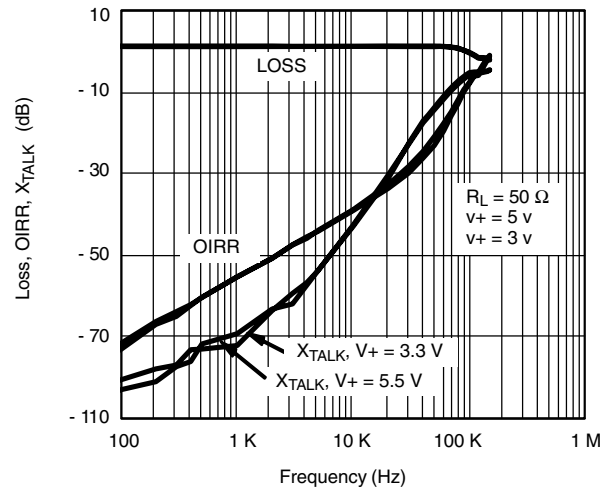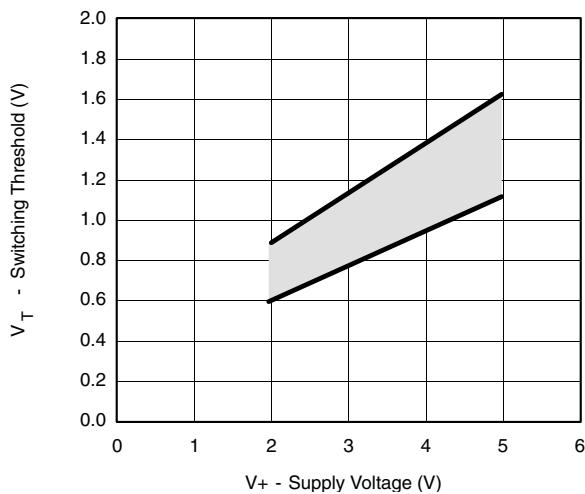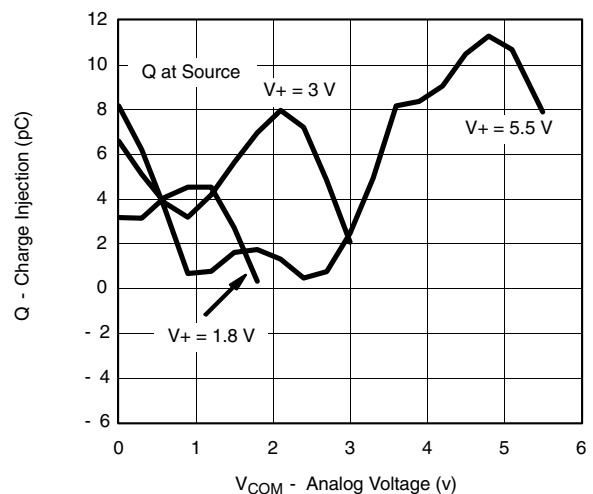**TYPICAL CHARACTERISTICS** 25 °C, unless otherwise noted**Switching Time vs. Temperature and Supply Voltage****Insertion Loss, Off-Isolation Crosstalk vs. Frequency****Switching Threshold vs. Supply Voltage****Charge Injection vs. Analog Voltage**

## TEST CIRCUITS




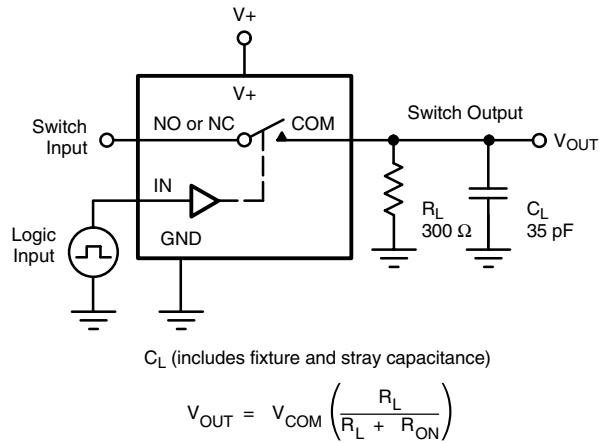


Figure 1. Switching Time

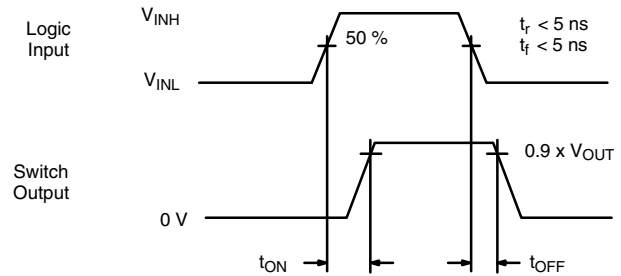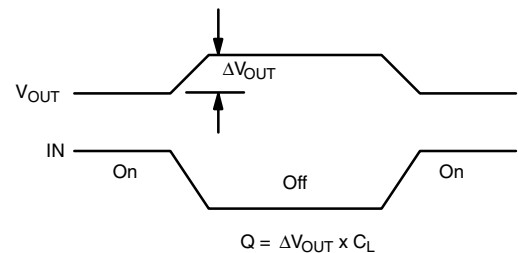

Logic "1" = Switch On  
Logic input waveforms inverted for switches that have the opposite logic sense.

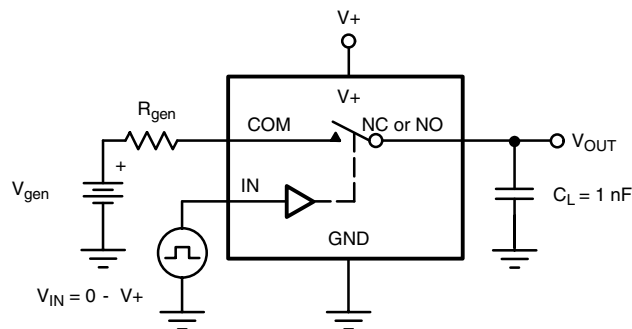

IN depends on switch configuration: input polarity determined by sense of switch.

Figure 2. Charge Injection

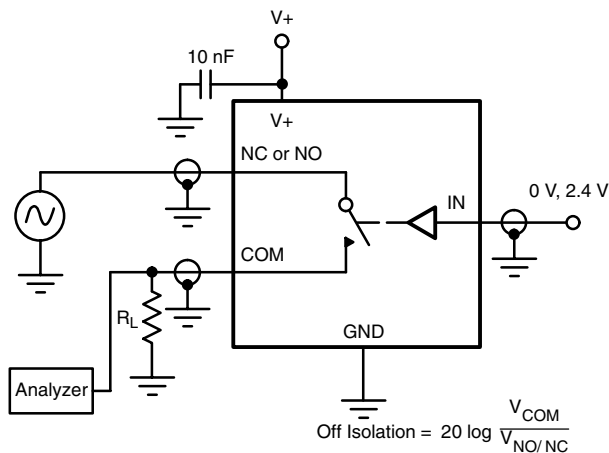


Figure 3. Off-Isolation

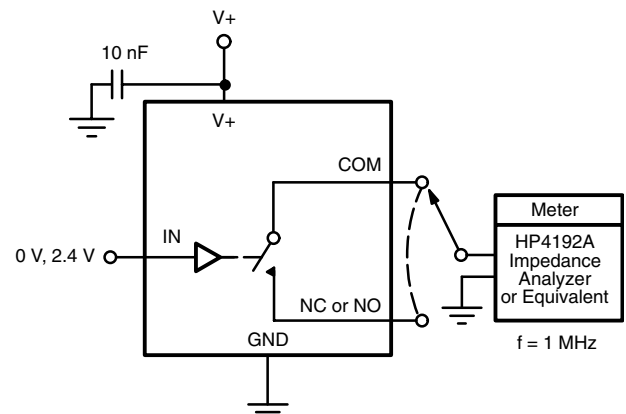


Figure 4. Channel Off/On Capacitance

Vishay Siliconix maintains worldwide manufacturing capability. Products may be manufactured at one of several qualified locations. Reliability data for Silicon Technology and Package Reliability represent a composite of all qualified locations. For related documents such as package/tape drawings, part marking, and reliability data, see <http://www.vishay.com/ppg?72359>.



### Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.



### Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.



### Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.



### Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.



### Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.



### Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.



### Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.



### Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.



### Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.



### Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.