

# DS1080L

## Spread-Spectrum Crystal Multiplier

### ABSOLUTE MAXIMUM RATINGS

Voltage on V<sub>CC</sub> Relative to GND .....-0.3V to +4.3V  
Voltage on Any Lead Relative  
to GND .....-0.3V to (V<sub>CC</sub> + 0.3V), not to exceed +4.3V  
Continuous Power Dissipation (T<sub>A</sub> = +70°C)  
μSOP (derate 4.5mW/°C above +70°C).....362mW

Operating Temperature Range .....-40°C to +125°C  
Storage Temperature Range .....-55°C to +125°C  
Lead Temperature (soldering, 10s).....+300°C  
Soldering Temperature (reflow) .....+260°C

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

### RECOMMENDED OPERATING CONDITIONS

(T<sub>A</sub> = -40°C to +125°C, unless otherwise noted.)

| PARAMETER                            | SYMBOL            | CONDITIONS                                      | MIN                       | TYP | MAX                      | UNITS |
|--------------------------------------|-------------------|-------------------------------------------------|---------------------------|-----|--------------------------|-------|
| Supply Voltage                       | V <sub>CC</sub>   | (Note 1)                                        | 3.0                       |     | 3.6                      | V     |
| Input Logic 1                        | V <sub>IH</sub>   |                                                 | 0.8 x<br>V <sub>CC</sub>  |     | V <sub>CC</sub> +<br>0.3 | V     |
| Input Logic 0                        | V <sub>IL</sub>   |                                                 | V <sub>GND</sub> -<br>0.3 |     | 0.2 x<br>V <sub>CC</sub> | V     |
| Input Logic Open                     | I <sub>IF</sub>   | 0V < V <sub>IN</sub> < V <sub>CC</sub> (Note 2) |                           |     | ±1                       | μA    |
| Input Leakage                        | I <sub>IL</sub>   | 0V < V <sub>IN</sub> < V <sub>CC</sub> (Note 3) |                           |     | ±80                      | μA    |
| SSO Load                             | C <sub>SSO</sub>  | f <sub>SSO</sub> < 67MHz                        |                           |     | 15                       | pF    |
|                                      |                   | 67MHz ≤ f <sub>SSO</sub> < 101MHz               |                           |     | 10                       |       |
|                                      |                   | 101MHz ≤ f <sub>SSO</sub> < 134MHz              |                           |     | 7                        |       |
| Crystal or Clock Input<br>Frequency  | f <sub>IN</sub>   |                                                 | 16.0                      |     | 33.4                     | MHz   |
| Crystal ESR                          | X <sub>ESR</sub>  |                                                 |                           |     | 90                       | Ω     |
| Clock Input Duty Cycle               | F <sub>INDC</sub> |                                                 | 40                        |     | 60                       | %     |
| Crystal Parallel Load<br>Capacitance | C <sub>L</sub>    | (Note 4)                                        |                           |     | 18                       | pF    |

### DC ELECTRICAL CHARACTERISTICS

(V<sub>CC</sub> = +3.0V to +3.6V, T<sub>A</sub> = -40°C to +125°C, unless otherwise noted.)

| PARAMETER                          | SYMBOL           | CONDITIONS                           | MIN | TYP | MAX | UNITS |
|------------------------------------|------------------|--------------------------------------|-----|-----|-----|-------|
| Supply Current                     | I <sub>CC1</sub> | C <sub>SSO</sub> = 15pF, SSO = 16MHz |     |     | 15  | mA    |
| Power-Down Current                 | I <sub>CCQ</sub> | PDN = GND, all input pins open       |     |     | 200 | μA    |
| Output Leakage (SSO)               | I <sub>OZ</sub>  | PDN = GND                            | -1  |     | +1  | μA    |
| Low-Level Output Voltage<br>(SSO)  | V <sub>OL</sub>  | I <sub>OL</sub> = 4mA                |     |     | 0.4 | V     |
| High-Level Output Voltage<br>(SSO) | V <sub>OH</sub>  | I <sub>OH</sub> = -4mA               | 2.4 |     |     | V     |
| Input Capacitance (X1/X2)          | C <sub>IN</sub>  | (Note 5)                             |     | 5   |     | pF    |

**Spread-Spectrum Crystal Multiplier****AC ELECTRICAL CHARACTERISTICS**(V<sub>CC</sub> = +3.0 to +3.6V, T<sub>A</sub> = -40°C to +125°C, unless otherwise noted.)

| PARAMETER                  | SYMBOL                                          | CONDITIONS                                                                         | MIN     | TYP                  | MAX | UNITS |
|----------------------------|-------------------------------------------------|------------------------------------------------------------------------------------|---------|----------------------|-----|-------|
| SSO Duty Cycle             | SSODC                                           | Measured at V <sub>CC</sub> /2, CMSEL = 0 or open                                  | 40      |                      | 60  | %     |
|                            |                                                 | Measured at V <sub>CC</sub> /2, CMSEL = 1                                          | 30      |                      | 70  |       |
| Rise Time                  | t <sub>R</sub>                                  | (Note 6)                                                                           |         | 1.6                  |     | ns    |
| Fall Time                  | t <sub>F</sub>                                  | (Note 6)                                                                           |         | 1.6                  |     | ns    |
| Peak Cycle-to-Cycle Jitter | t <sub>J</sub>                                  | f <sub>SSO</sub> = 16MHz, T <sub>A</sub> = -40 to +85°C,<br>10,000 cycles (Note 5) |         | 75                   |     | ps    |
| Power-Up Time              | t <sub>POR</sub>                                | $\overline{\text{PDN}}$ pin (Note 7)                                               | 16MHz   |                      | 20  | ms    |
|                            |                                                 |                                                                                    | 33.4MHz |                      | 11  |       |
| Power-Down Time            | t <sub><math>\overline{\text{PDN}}</math></sub> | $\overline{\text{PDN}}$ pin (Notes 8 and 9)                                        |         |                      | 100 | ns    |
| Dither Rate                | f <sub>DITHER</sub>                             | (Note 9)                                                                           |         | f <sub>IN</sub> /992 |     |       |


**Note 1:** All voltages referenced to ground.**Note 2:** Maximum source/sink current applied to input to be considered an open. Typical voltage range between 0.4 x V<sub>CC</sub> and 0.55 x V<sub>CC</sub>.**Note 3:** Applicable to pins CMSEL, SMSEL, and  $\overline{\text{PDN}}$ .**Note 4:** See information about C<sub>L1</sub> and C<sub>L2</sub> in the *Applications Information* section at the end of the data sheet.**Note 5:** Not production tested.**Note 6:** For 7pF load.**Note 7:** Time between  $\overline{\text{PDN}}$  deasserted to output active.**Note 8:** Time between  $\overline{\text{PDN}}$  asserted to output high impedance.**Note 9:** Guaranteed by design.

# DS1080L

## Spread-Spectrum Crystal Multiplier


### Typical Operating Characteristics

( $V_{CC} = 3.3V$ ,  $T_A = +25^\circ C$ , unless otherwise noted.)

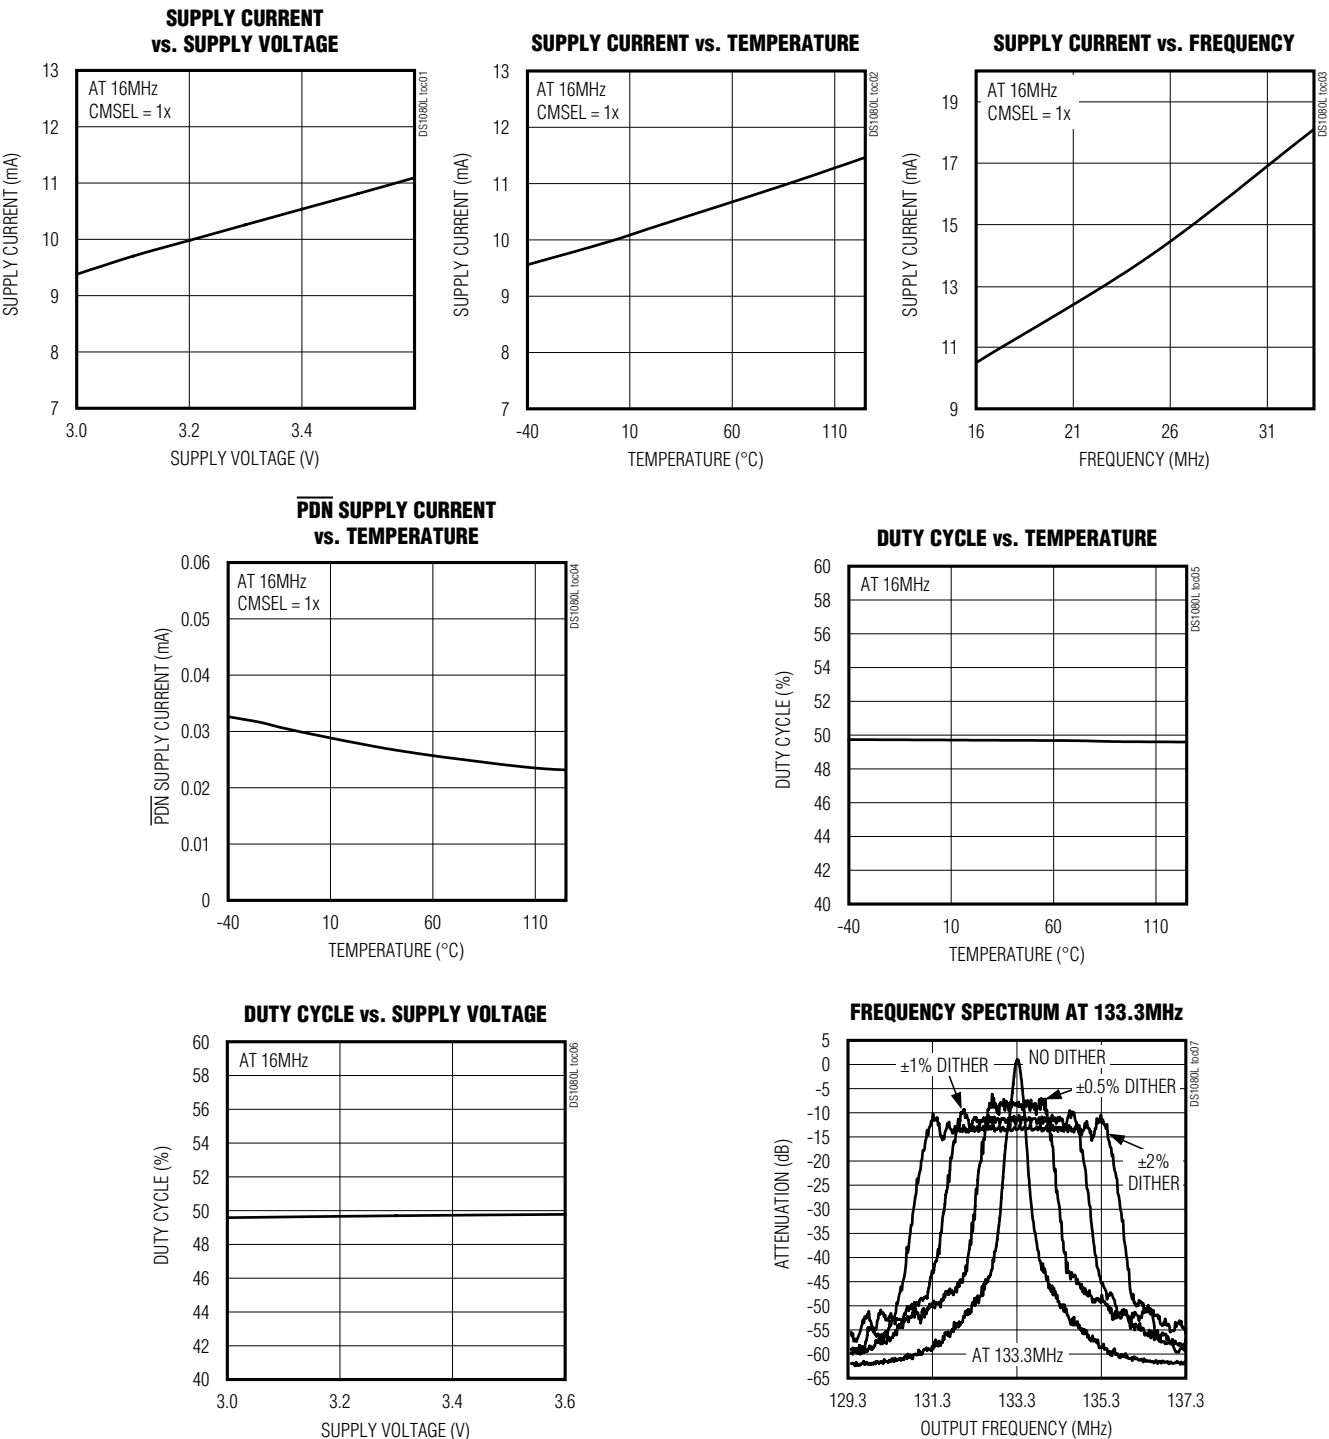

**Spread-Spectrum Crystal Multiplier****Pin Description**

| PIN | NAME                    | FUNCTION                                                                                                                                                                            |
|-----|-------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1   | X1                      | Crystal Drive/Clock Input. A crystal with the proper loading capacitors is connected across X1 and X2. Instead of a crystal, a clock can be applied at the X1 input.                |
| 2   | GND                     | Signal Ground                                                                                                                                                                       |
| 3   | CMSEL                   | Clock Multiplier Select. Tri-level digital input.<br>0 = 1x<br>Open = 2x<br>1 = 4x                                                                                                  |
| 4   | SMSEL                   | Spread-Spectrum Magnitude Select. Tri-level digital input.<br>0 = $\pm 0.5\%$<br>Open = $\pm 1.0\%$<br>1 = $\pm 1.5\%$                                                              |
| 5   | $\overline{\text{PDN}}$ | Power-Down/Spread-Spectrum Disable. Tri-level digital input.<br>0 = Power-Down/SSO Three-States<br>Open = Power-Up/Spread Spectrum Disabled<br>1 = Power-Up/Spread Spectrum Enabled |
| 6   | SSO                     | Spread-Spectrum Clock Multiplier Output. Outputs a 1x, 2x, or 4x spread-spectrum version of the crystal or clock applied at the X1/X2 pins.                                         |
| 7   | VCC                     | Supply Voltage                                                                                                                                                                      |
| 8   | X2                      | Crystal Drive Output. A crystal with the proper loading capacitors is connected across X1 and X2. If a clock is connected to X1, then X2 should be left open circuit.               |

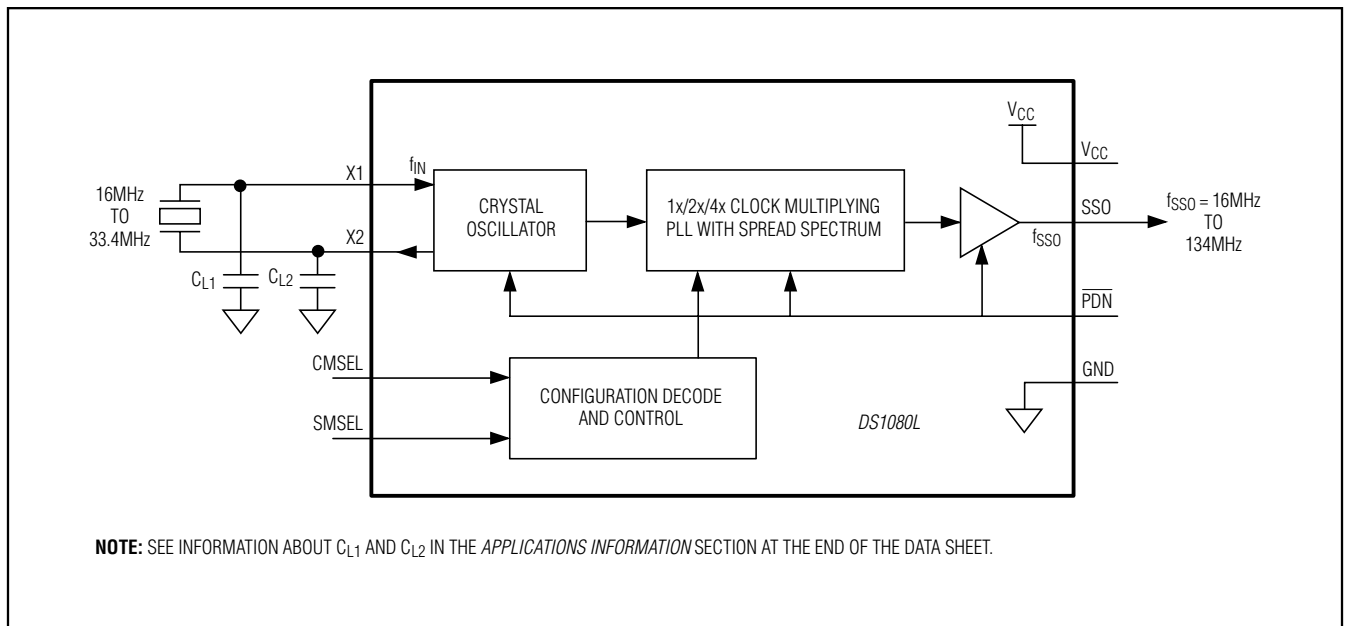**Block Diagram**

# DS1080L

## Spread-Spectrum Crystal Multiplier

### Detailed Description

The DS1080L is a crystal multiplier with center spread-spectrum capability. A 16MHz to 33.4MHz crystal is connected to the X1 and X2 pins. Alternately, a 16MHz to 33.4MHz clock can be applied to X1 in place of the crystal. In such applications, X2 would be left open circuit. Using the CMSEL input, the user selects whether the attached crystal or input clock is multiplied by 1, 2, or 4. The DS1080L is capable of generating spread-spectrum clocks from 16MHz to 134MHz.

The PLL can dither the output clock about its center frequency at a user-selectable magnitude. Using the SMSEL input, the user selects the dither magnitude. The PDN input can be used to place the device into a low-power standby mode where the SSO output is tri-stated. If the PDN pin is open, the SSO output is active but the spread-spectrum dithering is disabled. The spread-spectrum dither rate is fixed at  $f_{IN} / 992$  to keep the dither rate above the audio frequency range. On power-up, the output clock (SSO) remains three-stated until the PLL reaches a stable frequency ( $f_{SSO}$ ) and dither ( $f_{DITHER}$ ).

### Applications Information

#### Crystal Selection

The DS1080L requires a parallel resonating crystal operating in the fundamental mode, with an ESR of less than  $90\Omega$ . The crystal should be placed very close to the device to minimize excessive loading due to parasitic capacitances.

#### Oscillator Input

When driving the DS1080L using an external oscillator clock, consider the input (X1) to be high impedance.

#### Crystal Capacitor Selection

The load capacitors  $C_{L1}$  and  $C_{L2}$  are selected based on the crystal specifications (from the data sheet of the crystal used). The crystal parallel load capacitance is calculated as follows:

$$C_L = \frac{C_{L1} \times C_{L2}}{C_{L1} + C_{L2}} + C_{IN} \quad \text{Equation 1}$$

For the DS1080L use  $C_{L1} = C_{L2} = C_{LX}$ .

In this case, the equation then reduces to:

$$C_L = \frac{C_{LX}}{2} + C_{IN} \quad \text{Equation 2}$$

where  $C_{L1} = C_{L2} = C_{LX}$ .

Equation 2 is used to calculate the values of  $C_{L1}$  and  $C_{L2}$  based on values on  $C_L$  and  $C_{IN}$  noted in the data sheet electrical specifications.

#### Power-Supply Decoupling

To achieve best results, it is highly recommended that a decoupling capacitor is used on the IC power-supply pins. Typical values of decoupling capacitors are  $0.001\mu\text{F}$  and  $0.1\mu\text{F}$ . Use a high-quality, ceramic, surface-mount capacitor, and mount it as close as possible to the  $V_{CC}$  and GND pins of the IC to minimize lead inductance.


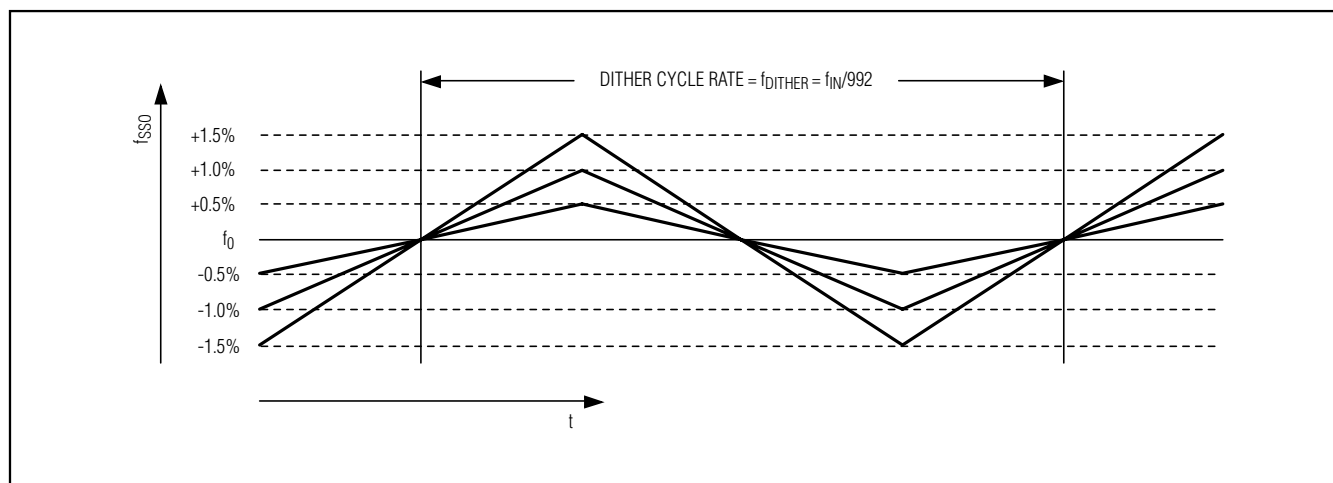


Figure 1. Spread-Spectrum Frequency Modulation

## Spread-Spectrum Crystal Multiplier

### Typical Operating Circuit

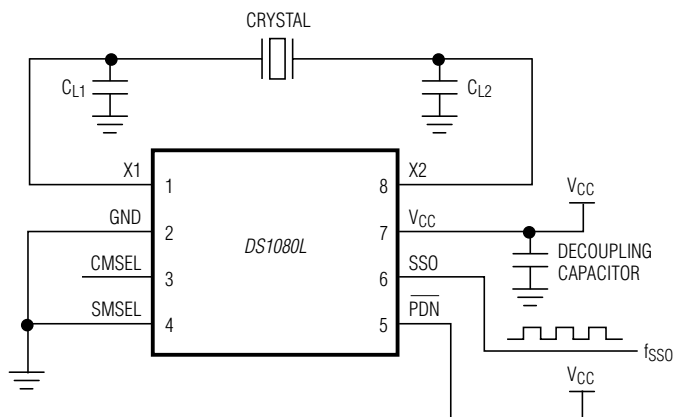

**NOTE:** IN THE ABOVE CONFIGURATION WITH  $\overline{\text{PDN}}$  CONNECTED TO  $V_{\text{CC}}$ ,  $\text{SMSEL}$  CONNECTED TO GND AND  $\text{CMSEL}$  OPEN, THE DEVICE IS IN NORMAL OPERATION WITH 2x CLOCK MULTIPLICATION, AND SPREAD-SPECTRUM MAGNITUDE OF  $\pm 0.5\%$ .

### Layout Considerations

As noted earlier, the crystal should be placed very close to the device to minimize excessive loading due to parasitic capacitances. Care should also be taken to minimize loading on pins that could be open as a programming option ( $\text{SMSEL}$  and  $\text{CMSEL}$ ). Coupling on inputs due to clocks should be minimized.

### Package Information

For the latest package outline information and land patterns (footprints), go to [www.maximintegrated.com/packages](http://www.maximintegrated.com/packages). Note that a "+", "#", or "-" in the package code indicates RoHS status only. Package drawings may show a different suffix character, but the drawing pertains to the package regardless of RoHS status.

| PACKAGE TYPE      | PACKAGE CODE | OUTLINE NO.             | LAND PATTERN NO.        |
|-------------------|--------------|-------------------------|-------------------------|
| 8 $\mu\text{SOP}$ | U8+1         | <a href="#">21-0036</a> | <a href="#">90-0092</a> |

# DS1080L

## Spread-Spectrum Crystal Multiplier

### Revision History

| REVISION NUMBER | REVISION DATE | DESCRIPTION                                                                                                                                                                                                                                                                                                                                                                                  | PAGES CHANGED |
|-----------------|---------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|
| 0               | 11/05         | Initial release                                                                                                                                                                                                                                                                                                                                                                              | —             |
| 1               | 3/06          | Changed $V_{IHMIN}$ from $0.7V \times V_{CC}$ to $0.08V \times V_{CC}$ and $V_{ILMAX}$ from $0.3 \times V_{CC}$ to $0.2V \times V_{CC}$ in the <i>Recommended Operating Conditions</i> table                                                                                                                                                                                                 | 2             |
| 2               | 10/09         | Changed the part number in the <i>Ordering Information</i> table                                                                                                                                                                                                                                                                                                                             | 1             |
| 3               | 10/11         | Updated the <i>Ordering Information</i> table and <i>Absolute Maximum Ratings</i> section; added the land pattern no. to the <i>Package Information</i> table                                                                                                                                                                                                                                | 1, 2, 7       |
| 4               | 5/12          | Clarified SSODC conditions and split limits based upon CMSEL input state                                                                                                                                                                                                                                                                                                                     | 3             |
| 5               | 3/13          | Updated the voltage ranges in the <i>Absolute Maximum Ratings</i> ; changed the supply current parameter from 13mA (max) to 15mA (max) in the <i>DC Electrical Characteristics</i> table; changed the dither rate parameter from $f_{IN}/1024$ to $f_{IN}/992$ in the <i>AC Electrical Characteristics</i> table; updated all graphs in the <i>Typical Operating Characteristics</i> section | 2, 3, 4       |



Maxim Integrated cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim Integrated product. No circuit patent licenses are implied. Maxim Integrated reserves the right to change the circuitry and specifications without notice at any time. The parametric values (min and max limits) shown in the Electrical Characteristics table are guaranteed. Other parametric values quoted in this data sheet are provided for guidance.