


SCHEMATIC DIAGRAM

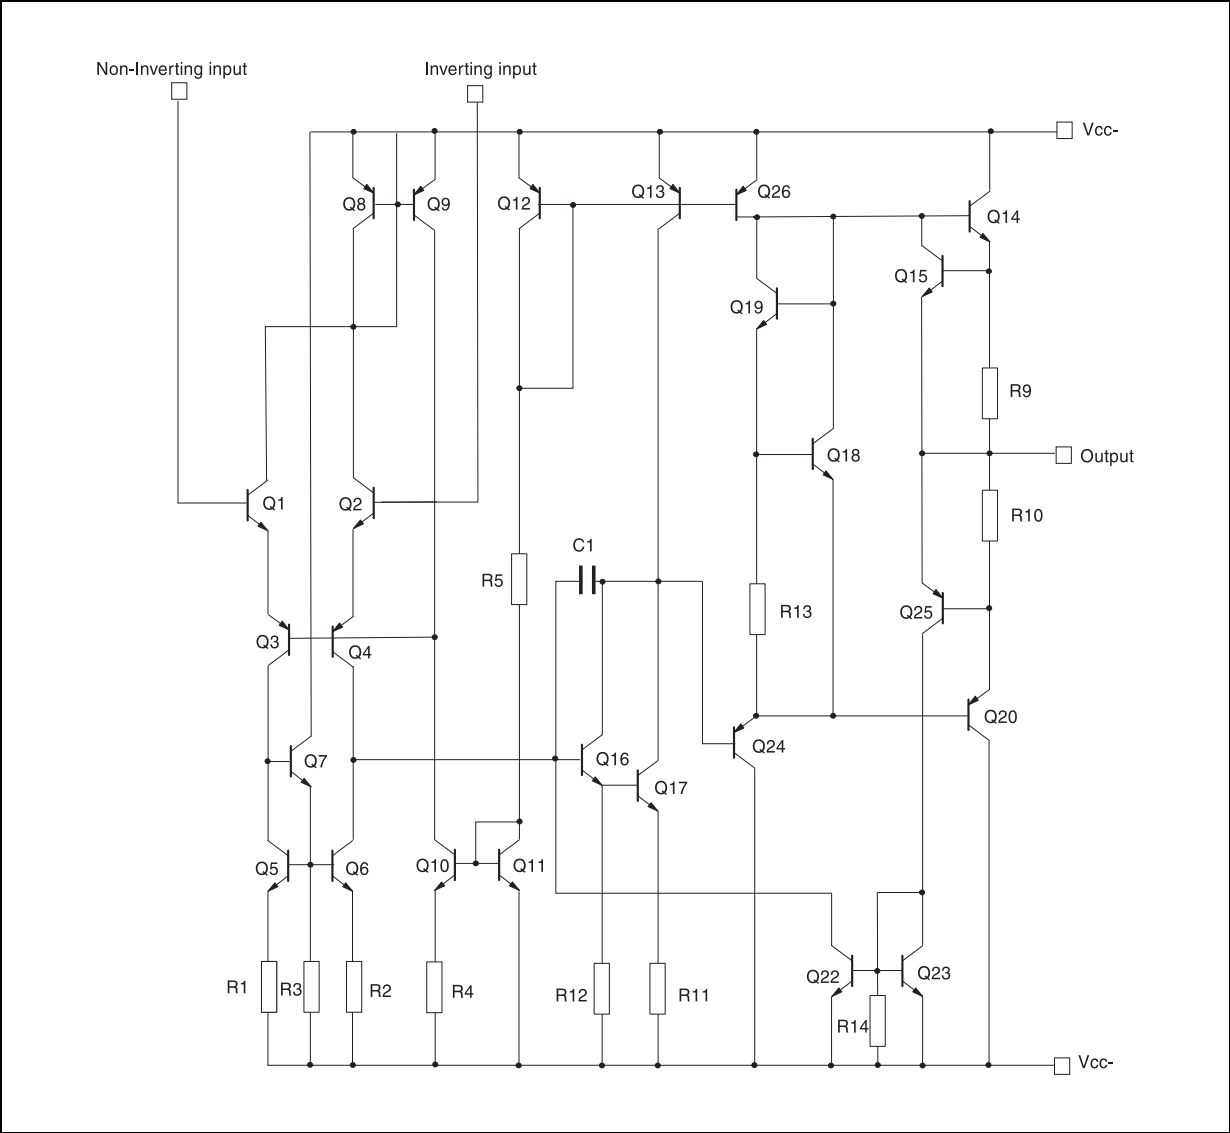

ABSOLUTE MAXIMUM RATINGS


| Symbol     | Parameter                                 | MC1458      | MC1458I     | MC1558      | Unit               |
|------------|-------------------------------------------|-------------|-------------|-------------|--------------------|
| $V_{CC}$   | Supply voltage                            | $\pm 22$    |             |             | V                  |
| $V_i$      | Input Voltage                             | $\pm 15$    |             |             | V                  |
| $V_{id}$   | Differential Input Voltage                | $\pm 30$    |             |             | V                  |
|            | Output Short-circuit Duration             | Infinite    |             |             |                    |
| $P_{tot}$  | Power Dissipation<br>D Suffix<br>N Suffix | 300<br>500  |             |             | mW                 |
| $T_{oper}$ | Operating Free-air Temperature Range      | 0 to +70    | -40 to +105 | -55 to +125 | $^{\circ}\text{C}$ |
| $T_{stg}$  | Storage Temperature Range                 | -65 to +150 |             |             | $^{\circ}\text{C}$ |

**ELECTRICAL CHARACTERISTICS** $V_{CC} = \pm 15V$ ,  $T_{amb} = 25^{\circ}C$  (unless otherwise specified)

| Symbol        | Parameter                                                                                                                                                                            | Min.                 | Typ.     | Max.       | Unit       |
|---------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|----------|------------|------------|
| $V_{io}$      | Input Offset Voltage ( $R_s \leq 10k\Omega$ )<br>$T_{amb} = 25^{\circ}C$<br>$T_{min} \leq T_{amb} \leq T_{max}$                                                                      |                      | 1        | 5<br>6     | mV         |
| $I_{io}$      | Input Offset Current<br>$T_{amb} = 25^{\circ}C$<br>$T_{min} \leq T_{amb} \leq T_{max}$                                                                                               |                      | 2        | 200<br>300 | nA         |
| $I_{ib}$      | Input Bias Current<br>$T_{amb} = 25^{\circ}C$<br>$T_{min} \leq T_{amb} \leq T_{max}$                                                                                                 |                      | 30       | 500<br>800 | nA         |
| $A_{vd}$      | Large Signal Voltage Gain ( $V_o = \pm 10V$ , $R_L = 2k\Omega$ )<br>$T_{amb} = 25^{\circ}C$<br>$T_{min} \leq T_{amb} \leq T_{max}$                                                   | 50<br>25             | 200      |            | V/mV       |
| SVR           | Supply Voltage Rejection Ratio ( $R_s \leq 10k\Omega$ )<br>$T_{amb} = 25^{\circ}C$<br>$T_{min} \leq T_{amb} \leq T_{max}$                                                            | 77<br>77             | 90       |            | dB         |
| $I_{cc}$      | Supply Current, all Amp, no load<br>$T_{amb} = 25^{\circ}C$<br>$T_{min} \leq T_{amb} \leq T_{max}$                                                                                   |                      | 2.3      | 5<br>6     | mA         |
| $V_{icm}$     | Input Common Mode Voltage Range<br>$T_{amb} = 25^{\circ}C$<br>$T_{min} \leq T_{amb} \leq T_{max}$                                                                                    | $\pm 12$<br>$\pm 12$ |          |            |            |
| CMR           | Common Mode Rejection Ratio ( $R_s \leq 10k\Omega$ )<br>$T_{amb} = 25^{\circ}C$<br>$T_{min} \leq T_{amb} \leq T_{max}$                                                               | 70<br>70             | 90       |            | dB         |
| $I_{os}$      | Output Short-circuit Current<br>$T_{amb} = 25^{\circ}C$                                                                                                                              | 10                   | 20       | 35         | mA         |
| $\pm V_{opp}$ | Output Voltage Swing<br>$T_{amb} = 25^{\circ}C$<br>$T_{min} \leq T_{amb} \leq T_{max}$<br>$R_L \leq 10k\Omega$<br>$R_L \leq 2k\Omega$<br>$R_L \leq 10k\Omega$<br>$R_L \leq 2k\Omega$ | 12<br>10<br>12<br>10 | 14<br>13 |            | V          |
| SR            | Slew Rate ( $V_i = \pm 10V$ , $R_L = 2k\Omega$ , $C_L = 100pF$ , unity Gain)                                                                                                         | 0.2                  | 0.8      |            | V/ $\mu s$ |
| $t_r$         | Rsie Time ( $V_i = \pm 20mV$ , $R_L = 2k\Omega$ , $C_L = 100pF$ , unity Gain)                                                                                                        |                      | 0.3      |            | $\mu s$    |
| $K_{OV}$      | Overshoot ( $V_i = 20mV$ , $R_L = 2k\Omega$ , $C_L = 100pF$ , unity Gain)                                                                                                            |                      | 5        |            | %          |
| $R_i$         | Input Resistance                                                                                                                                                                     | 0.3                  | 2        |            | $M\Omega$  |
| $Z_{ic}$      | Common-mode Input Impedance                                                                                                                                                          |                      | 200      |            | $M\Omega$  |
| $C_i$         | Input Capacitance                                                                                                                                                                    |                      | 1.4      |            | pF         |
| $R_o$         | Output Resistance                                                                                                                                                                    |                      | 75       |            | $\Omega$   |
| FPB           | Full Power Bandwidth ( $R_L = 2k\Omega$ , $V_o \geq \pm 10V$ , $A_{VD} = 1$ , THD $\leq 5\%$ )                                                                                       |                      | 14       |            | KHz        |

| Symbol          | Parameter                                                                                                                                     | Min. | Typ. | Max. | Unit                                 |
|-----------------|-----------------------------------------------------------------------------------------------------------------------------------------------|------|------|------|--------------------------------------|
| B               | Unity Gain Bandwidth<br>( $V_I = 10\text{ mV}$ , $R_L = 2\text{ k}\Omega$ , $C_L = 100\text{ pF}$ )                                           |      | 1    |      | MHZ                                  |
| GBP             | Gain Bandwith Product ( $V_I = 10\text{ mV}$ , $R_L = 2\text{ k}\Omega$ , $C_L = 100\text{ pF}$<br>$f = 100\text{ kHz}$ )                     | 0.4  | 1    |      | MHz                                  |
| THD             | Total Harmonic Distortion ( $f = 1\text{ kHz}$ , $A_v = 20\text{ dB}$ , $R_L = 2\text{ k}\Omega$<br>$C_L = 100\text{ pF}$ , $V_o = 2V_{pp}$ ) |      | 0.02 |      | %                                    |
| $e_n$           | Equivalent Input Noise Voltage ( $f = 1\text{ kHz}$ , $R_s = 100\Omega$ )                                                                     |      | 45   |      | $\frac{\text{nV}}{\sqrt{\text{Hz}}}$ |
| $\phi_m$        | Phase Margin                                                                                                                                  |      | 65   |      | Degrees                              |
| Am              | Gain Margin                                                                                                                                   |      | 11   |      | dB                                   |
| $V_{o1}/V_{o2}$ | Channel Separation                                                                                                                            |      | 120  |      | dB                                   |


PACKAGE MECHANICAL DATA  
8 PINS - PLASTIC PACKAGE

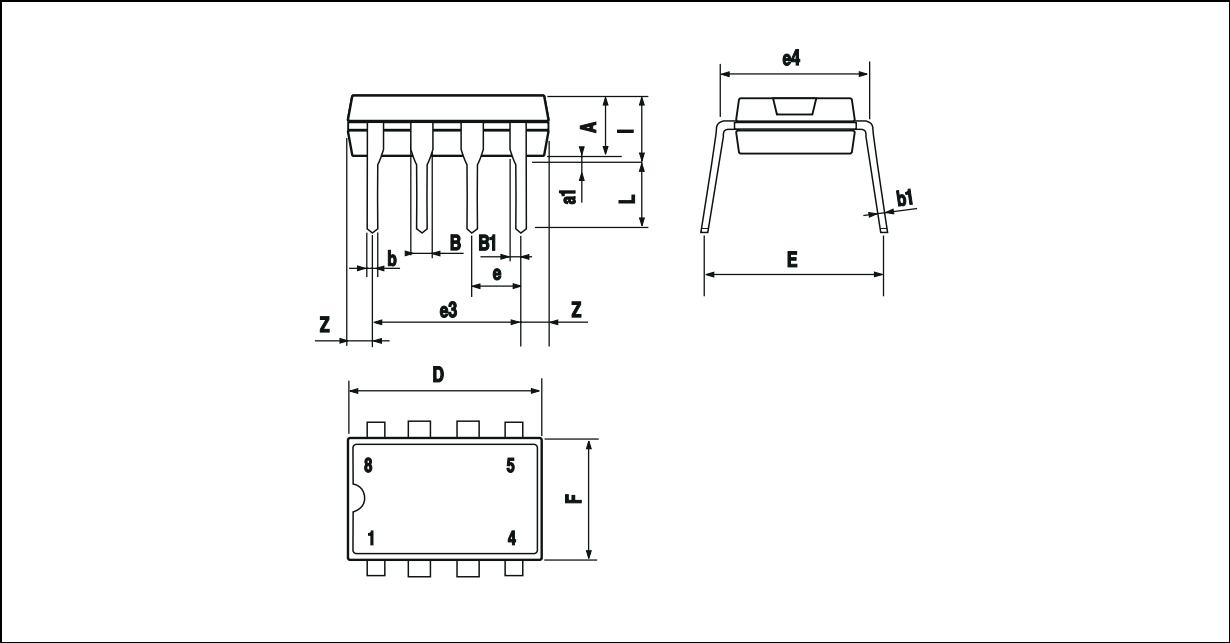

| Dimensions | Millimeters |      |       | Inches |       |       |
|------------|-------------|------|-------|--------|-------|-------|
|            | Min.        | Typ. | Max.  | Min.   | Typ.  | Max.  |
| A          |             | 3.32 |       |        | 0.131 |       |
| a1         | 0.51        |      |       | 0.020  |       |       |
| B          | 1.15        |      | 1.65  | 0.045  |       | 0.065 |
| b          | 0.356       |      | 0.55  | 0.014  |       | 0.022 |
| b1         | 0.204       |      | 0.304 | 0.008  |       | 0.012 |
| D          |             |      | 10.92 |        |       | 0.430 |
| E          | 7.95        |      | 9.75  | 0.313  |       | 0.384 |
| e          |             | 2.54 |       |        | 0.100 |       |
| e3         |             | 7.62 |       |        | 0.300 |       |
| e4         |             | 7.62 |       |        | 0.300 |       |
| F          |             |      | 6.6   |        |       | 0.260 |
| i          |             |      | 5.08  |        |       | 0.200 |
| L          | 3.18        |      | 3.81  | 0.125  |       | 0.150 |
| Z          |             |      | 1.52  |        |       | 0.060 |

## PACKAGE MECHANICAL DATA

8 PINS - PLASTIC MICROPACKAGE (SO)

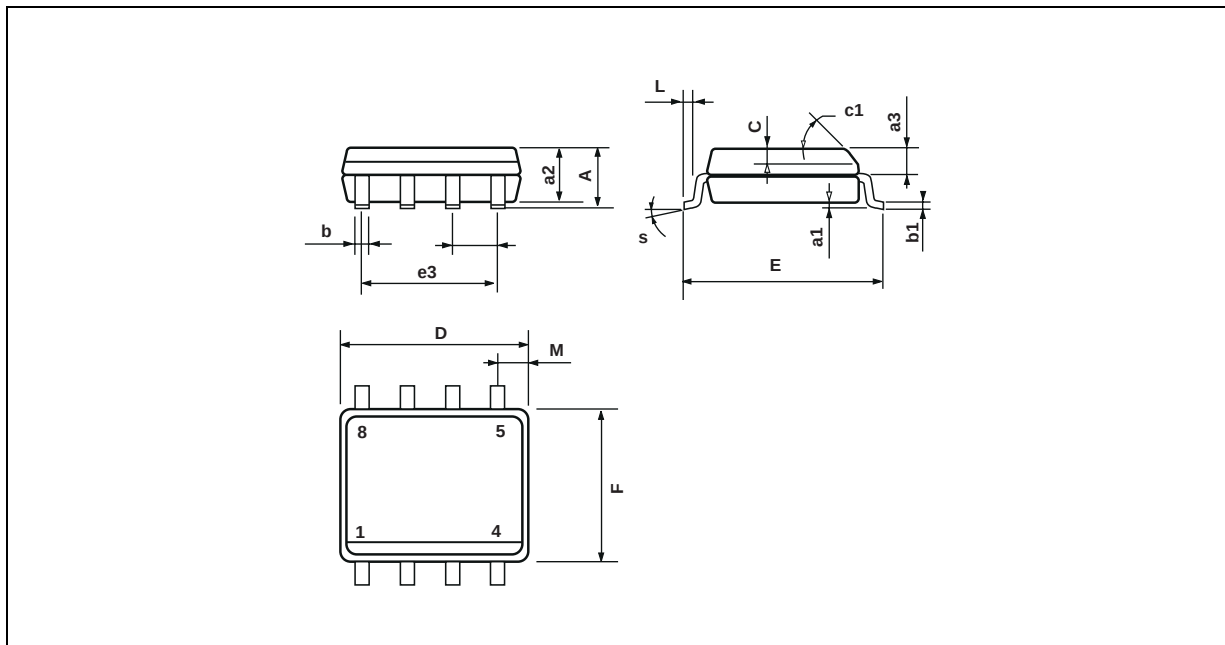

| Dimensions | Millimeters |      |      | Inches |       |       |
|------------|-------------|------|------|--------|-------|-------|
|            | Min.        | Typ. | Max. | Min.   | Typ.  | Max.  |
| A          |             |      | 1.75 |        |       | 0.069 |
| a1         | 0.1         |      | 0.25 | 0.004  |       | 0.010 |
| a2         |             |      | 1.65 |        |       | 0.065 |
| a3         | 0.65        |      | 0.85 | 0.026  |       | 0.033 |
| b          | 0.35        |      | 0.48 | 0.014  |       | 0.019 |
| b1         | 0.19        |      | 0.25 | 0.007  |       | 0.010 |
| C          | 0.25        |      | 0.5  | 0.010  |       | 0.020 |
| c1         | 45° (typ.)  |      |      |        |       |       |
| D          | 4.8         |      | 5.0  | 0.189  |       | 0.197 |
| E          | 5.8         |      | 6.2  | 0.228  |       | 0.244 |
| e          |             | 1.27 |      |        | 0.050 |       |
| e3         |             | 3.81 |      |        | 0.150 |       |
| F          | 3.8         |      | 4.0  | 0.150  |       | 0.157 |
| L          | 0.4         |      | 1.27 | 0.016  |       | 0.050 |
| M          |             |      | 0.6  |        |       | 0.024 |
| S          | 8° (max.)   |      |      |        |       |       |

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

© The ST logo is a registered trademark of STMicroelectronics

© 2001 STMicroelectronics - Printed in Italy - All Rights Reserved  
STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - Canada - China - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia  
Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States

© <http://www.st.com>