

Typical Characteristic Curves

Fig.1 Peak Pulse Power Rating Curve

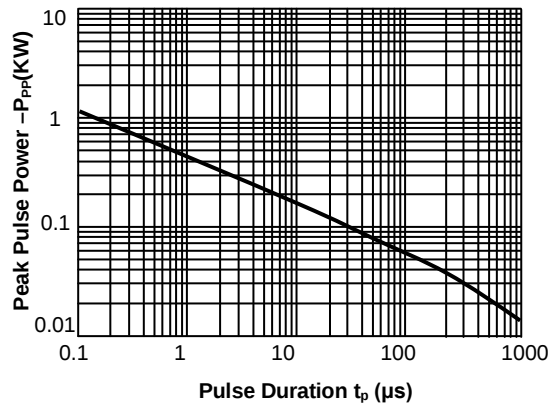


Fig.2 Pulse Derating Curve

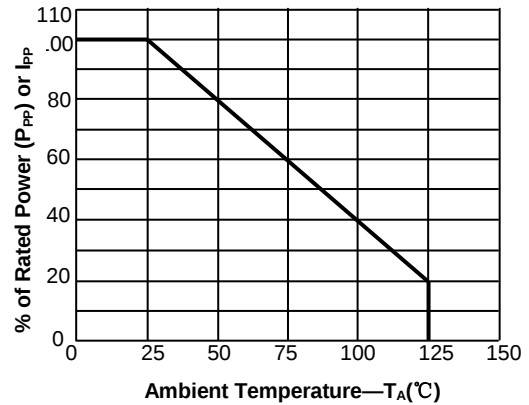


Fig.3 Pulse Waveform-8/20μs



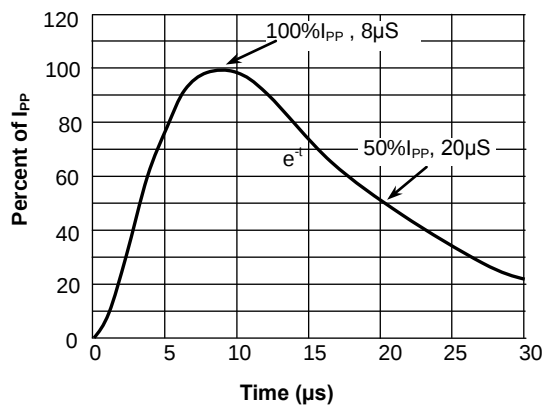


Fig.4 Pulse Waveform-ESD(IEC61000-4-2)

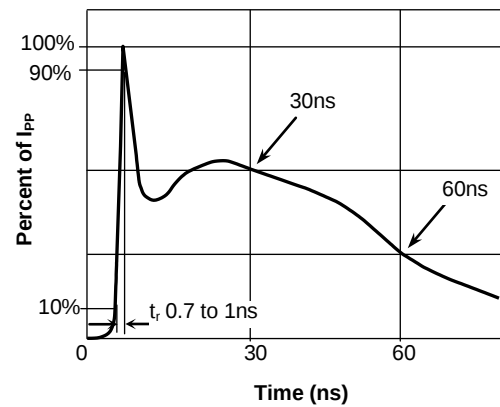


Product Dimensions

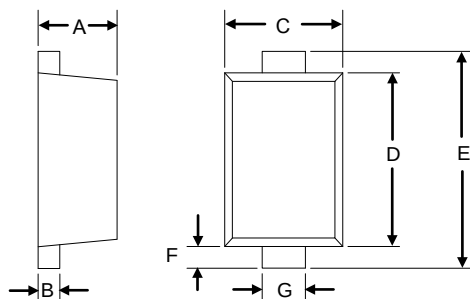

SOD-923


Dim	millimeters	
	min	max
A	0.34	0.40
B	0.07	0.17
C	0.55	0.65
D	0.75	0.85
E	0.95	1.05
F	0.05	0.15
G	0.15	0.25

PAD Dimensions



Dim	millimeters
I	0.90
J	0.30
K	0.35

Package Information

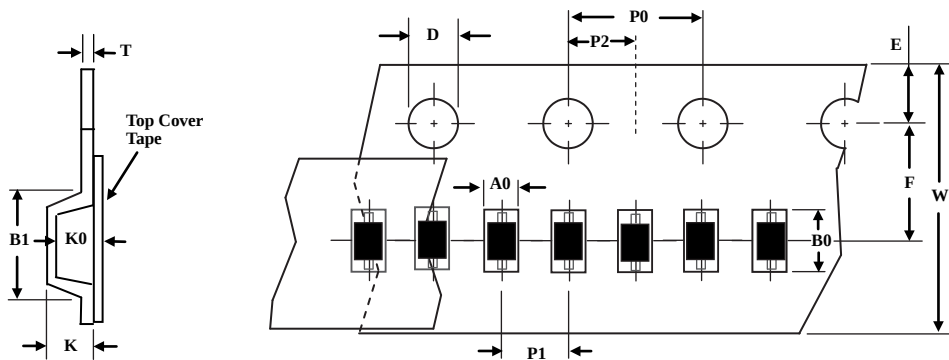


TapeSize(W)	B1 max	D	E	F	K max	P0	P1	P2	T max	W max
8	4.55	1.55±0.05	1.75±0.1	3.5±0.05	2.4	4.0±0.1	2.0±0.05	2.0±0.05	0.6	8.3

Note:1.Unit : mm

2. A0, B0, and K0 are determined by component size. The clearance between the components and the cavity must be within 0.05mm min to 0.50 mm max. The component cannot rotate more than 10° within the determined cavity.

Marking



× : DateCode

Order Information

Device	Package	Net Weight	Carrier	Quantity	HSF Status
SES5VD923-2B	SOD-923	0.0006g	Tape & Reel	8000pcs / Reel	RoHS compliant