

Absolute Maximum Ratings


Symbol	Parameter	Value	Units
I_{PP}	Peak Current ($t_p=8/20\mu s$)	2.0	A
T_{OP}	Operating Temperature	-55 to 125	°C
T_{STOR}	Storage Temperature	-55 to 150	°C

CAUTION: Stresses above those listed in "Absolute Maximum Ratings" may cause permanent damage to the component. This is a stress only rating and operation of the component at these or any other conditions above those indicated in the operational sections of this specification is not implied.


Electrical Characteristics - ($T_{OP}=25^{\circ}C$)

Parameter	Test Conditions	Min	Typ	Max	Units
Input Capacitance	@ $V_R = 0V$, $f = 3GHz$		0.20	0.22	pF
Breakdown Voltage	V_{BR} @ $I_r=1mA$		9.00		V
Reverse Working Voltage				7.0	V
Reverse Leakage Current	I_L @ $V_{RWM}=5.0V$		25	50	nA
Clamping Voltage	V_{CL} @ $I_{PP}=2.0A$		9.20		V
Peak Pulse Current	$t_p=8/20\mu s$			2.0	A
ESD Withstand Voltage	IEC61000-4-2 (Contact)	± 20			kV
	IEC 61000-4-2 (Air)	± 20			


Insertion Loss Diagram

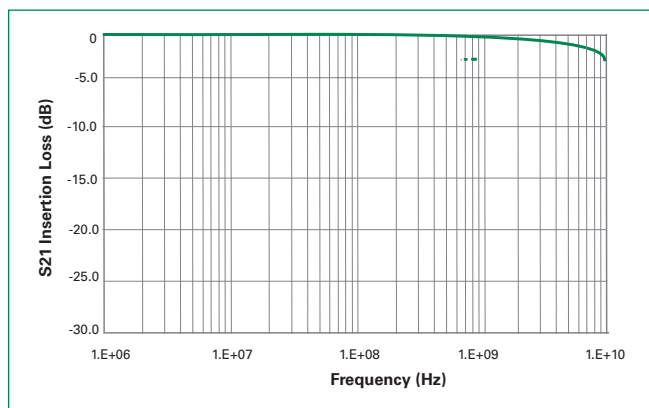

Insertion Loss Diagram - 1103 DFN Array

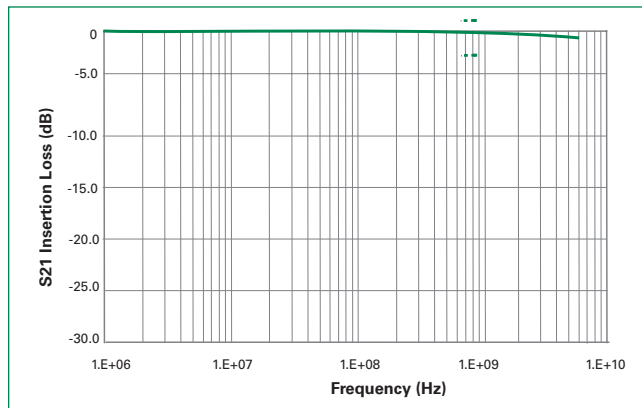


Component IV Curve

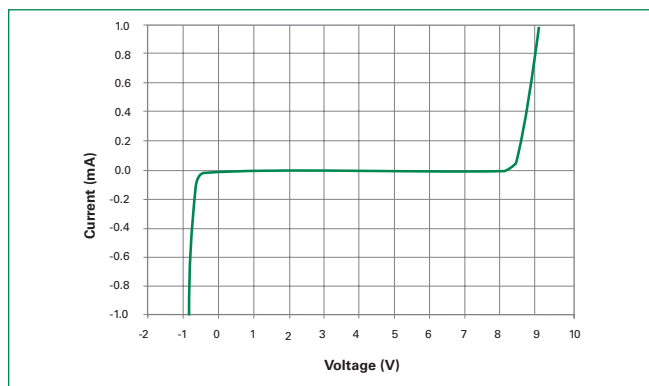


USB3.0 Eye Diagram

5.0 Gb/s, 1000mV differential, CPO Compliant Test Pattern

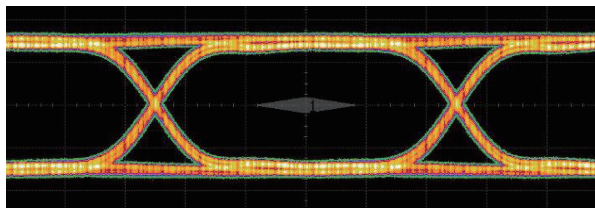


Without SESD Device

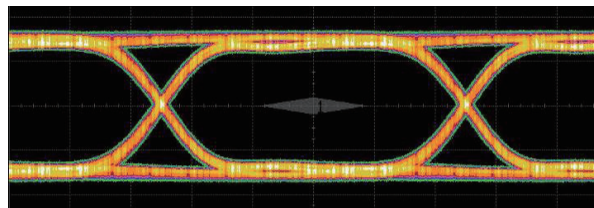


With SESD Device

Soldering Parameters

Reflow Condition		Pb – Free assembly
Pre Heat	- Temperature Min ($T_{s(min)}$)	150°C
	- Temperature Max ($T_{s(max)}$)	200°C
	- Time (min to max) (t_s)	60 – 180 secs
Average ramp up rate (Liquidus) Temp (T_L) to peak		3°C/second max
$T_{s(max)}$ to T_L - Ramp-up Rate		3°C/second max
Reflow	- Temperature (T_L) (Liquidus)	217°C
	- Temperature (t_L)	60 – 150 seconds
Peak Temperature (T_p)		260 ^{+0/-5} °C
Time within 5°C of actual peak Temperature (t_p)		20 – 40 seconds
Ramp-down Rate		6°C/second max
Time 25°C to peak Temperature (T_p)		8 minutes Max.
Do not exceed		260°C

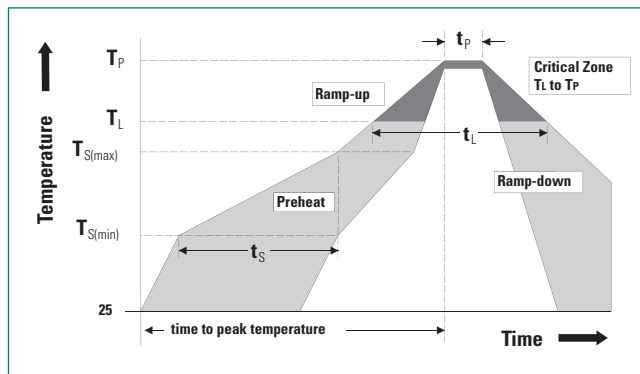


Package Dimensions — 0402 DFN Array

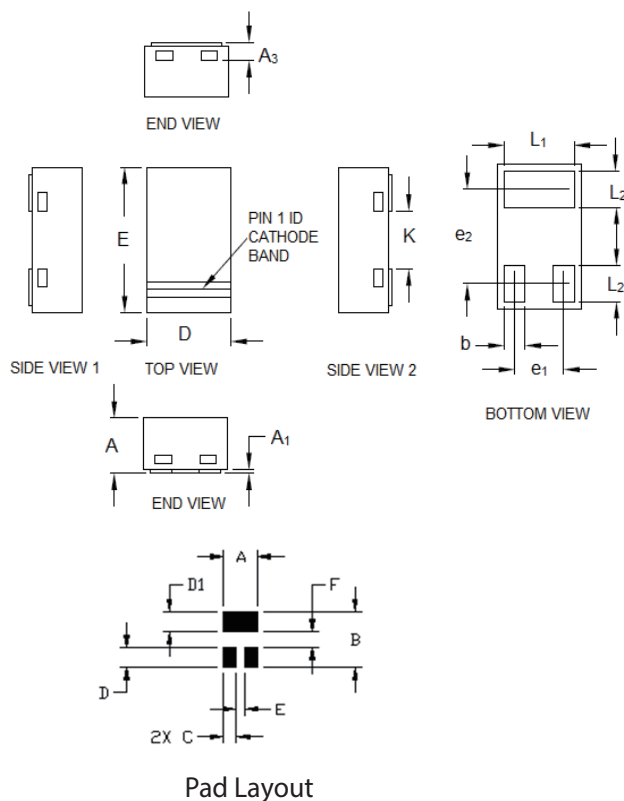

Symbol	Millimeters			Inches		
	Min	Typ	Max	Min	Typ	Max
A	0.33	0.38	0.43	0.013	0.015	0.017
A1	0	-	0.05	0	-	0.002
A3	0.13 ref.			0.005 ref.		
D	0.55	0.60	0.65	0.022	0.024	0.026
E	0.95	1.00	1.05	0.037	0.039	0.041
K	0.35	0.40	0.45	0.014	0.016	0.018
L1	0.45	0.50	0.55	0.018	0.020	0.022
L2	0.20	0.25	0.30	0.008	0.010	0.012
b	0.10	0.15	0.20	0.004	0.006	0.008
e1	0.35 BSC			0.014 BSC		
e2	0.65 BSC			0.026 BSC		


Symbol	Millimeters	Inches
A	0.60	0.024
B	1.00	0.039
C	0.23	0.009
D	0.35	0.014
D1	0.35	0.014
E	0.15	0.006
F	0.30	0.012

Embossed Carrier Tape & Reel Specification — 0402 DFN Array

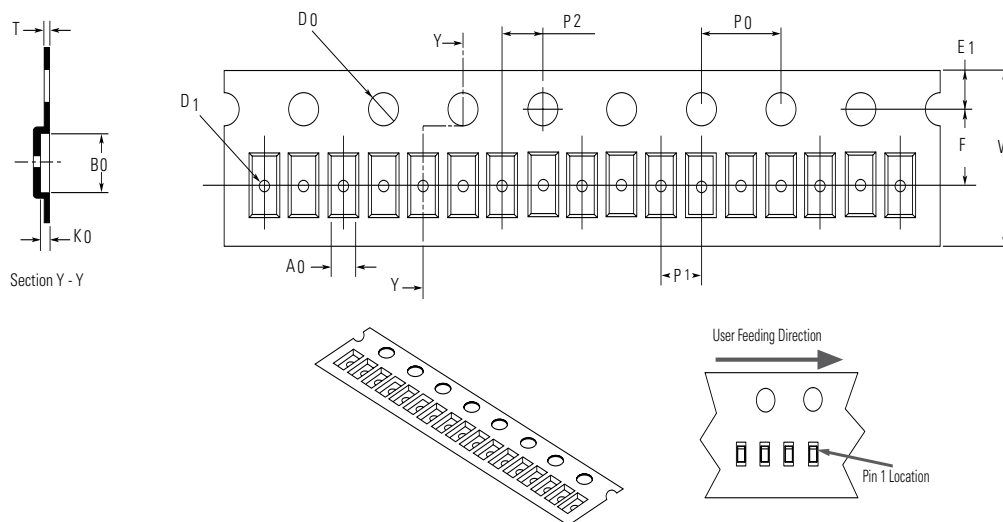


Symbol	Millimeters
A0	0.70+/-0.05
B0	1.15+/-0.05
D0	ø 1.55 + 0.05
D1	ø 0.40 +/- 0.05
E1	1.75+/-0.10
F	3.50+/-0.05
K0	0.47+/-0.05
P0	4.00+/-0.10
P1	2.00+/-0.05
P2	2.00+/-0.05
W	8.00 +/-0.10
T	0.20+/-0.05

Package Dimensions — 0802 DFN Array

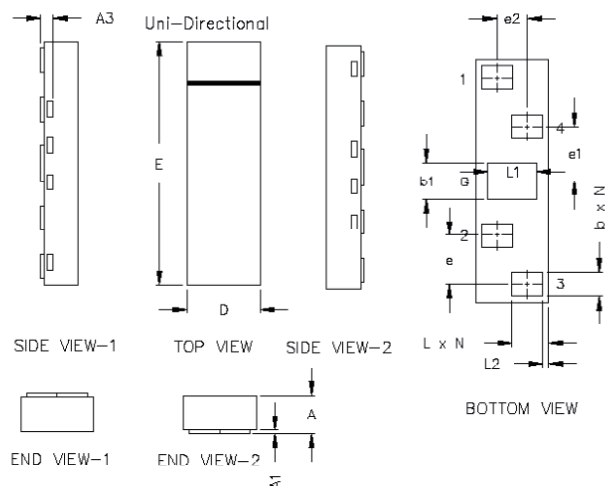


Symbol	Millimeters			Inches		
	Min	Typ	Max	Min	Typ	Max
A	0.33	0.38	0.43	0.013	0.015	0.017
A1	0	0.02	0.05	0	—	0.002
A3	0.127 ref			0.005 ref.		
D	0.50	0.60	0.70	0.020	0.024	0.028
E	1.90	2.00	2.10	0.075	0.079	0.083
b	0.15	0.20	0.25	0.006	0.008	0.010
b1	0.25	0.30	0.36	0.010	0.012	0.014
L	0.25	0.30	0.36	0.010	0.012	0.014
L1	0.35	0.40	0.45	0.014	0.016	0.018
L2	0.05 BSC			0.002 BSC		
e	0.40 BSC			0.016 BSC		
e1	0.45 BSC			0.018 BSC		
e2	0.25 BSC			0.010 BSC		
N	4			4		

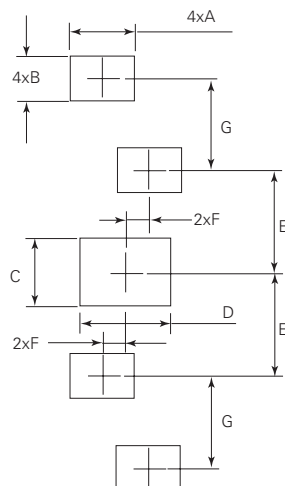

Recommended Soldering Pattern

Symbol	Millimeters	Inches
A	0.35	0.014
B	0.20	0.008
C	0.30	0.012
D	0.50	0.020
E	0.45 BSC	0.018 BSC
F	0.125 BSC	0.005 BSC
G	0.40 BSC	0.016 BSC

Embossed Carrier Tape & Reel Specification — 0802 DFN Array

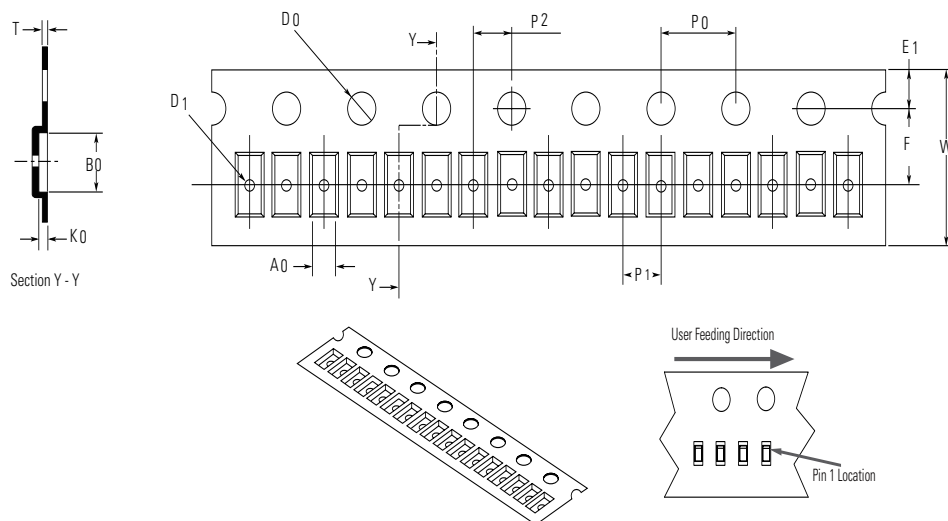

Symbol	Millimeters
A0	0.81+/-0.05
B0	2.21+/-0.05
D0	ø 1.50+0.10/-0
D1	ø 0.40 min
E1	1.75+/-0.10
F	3.50+/-0.05
K0	0.46+/-0.05
P0	4.00+/-0.10
P1	2.00+/-0.10
P2	2.00+/-0.05
W	8.00+0.30/-0.10
T	0.25+/-0.20

Figure 1 shows the mechanical drawing of a rectangular plate with a central slot and a circular hole. The drawing includes four views: Side View 1, Top View, Side View 2 (Front), and Bottom View. Dimensions are labeled with letters and numbers.

- Side View 1:** Shows the profile of the plate with a central slot. Dimensions include E (total height), D (slot width), and A (plate thickness).
- Top View:** Shows the plate from above. Dimensions include D (slot width), E (total height), and A (plate thickness).
- Side View 2 (Front):** Shows the front profile of the plate. Dimensions include A (plate thickness), A_1 (top flange thickness), A_3 (bottom flange thickness), $L1$ (total length), $L2$ (slot length), $L3$ (hole diameter), $L4$ (hole offset), $L5$ (hole radius), $L6$ (hole offset), $L7$ (hole radius), $L8$ (hole offset), $L9$ (hole radius), $L10$ (hole offset), $L11$ (hole radius), $L12$ (hole offset), $L13$ (hole radius), $L14$ (hole offset), $L15$ (hole radius), $L16$ (hole offset), $L17$ (hole radius), $L18$ (hole offset), $L19$ (hole radius), $L20$ (hole offset), $L21$ (hole radius), $L22$ (hole offset), $L23$ (hole radius), $L24$ (hole offset), $L25$ (hole radius), $L26$ (hole offset), $L27$ (hole radius), $L28$ (hole offset), $L29$ (hole radius), $L30$ (hole offset), $L31$ (hole radius), $L32$ (hole offset), $L33$ (hole radius), $L34$ (hole offset), $L35$ (hole radius), $L36$ (hole offset), $L37$ (hole radius), $L38$ (hole offset), $L39$ (hole radius), $L40$ (hole offset), $L41$ (hole radius), $L42$ (hole offset), $L43$ (hole radius), $L44$ (hole offset), $L45$ (hole radius), $L46$ (hole offset), $L47$ (hole radius), $L48$ (hole offset), $L49$ (hole radius), $L50$ (hole offset), $L51$ (hole radius), $L52$ (hole offset), $L53$ (hole radius), $L54$ (hole offset), $L55$ (hole radius), $L56$ (hole offset), $L57$ (hole radius), $L58$ (hole offset), $L59$ (hole radius), $L60$ (hole offset), $L61$ (hole radius), $L62$ (hole offset), $L63$ (hole radius), $L64$ (hole offset), $L65$ (hole radius), $L66$ (hole offset), $L67$ (hole radius), $L68$ (hole offset), $L69$ (hole radius), $L70$ (hole offset), $L71$ (hole radius), $L72$ (hole offset), $L73$ (hole radius), $L74$ (hole offset), $L75$ (hole radius), $L76$ (hole offset), $L77$ (hole radius), $L78$ (hole offset), $L79$ (hole radius), $L80$ (hole offset), $L81$ (hole radius), $L82$ (hole offset), $L83$ (hole radius), $L84$ (hole offset), $L85$ (hole radius), $L86$ (hole offset), $L87$ (hole radius), $L88$ (hole offset), $L89$ (hole radius), $L90$ (hole offset), $L91$ (hole radius), $L92$ (hole offset), $L93$ (hole radius), $L94$ (hole offset), $L95$ (hole radius), $L96$ (hole offset), $L97$ (hole radius), $L98$ (hole offset), $L99$ (hole radius), $L100$ (hole offset), $L101$ (hole radius), $L102$ (hole offset), $L103$ (hole radius), $L104$ (hole offset), $L105$ (hole radius), $L106$ (hole offset), $L107$ (hole radius), $L108$ (hole offset), $L109$ (hole radius), $L110$ (hole offset), $L111$ (hole radius), $L112$ (hole offset), $L113$ (hole radius), $L114$ (hole offset), $L115$ (hole radius), $L116$ (hole offset), $L117$ (hole radius), $L118$ (hole offset), $L119$ (hole radius), $L120$ (hole offset), $L121$ (hole radius), $L122$ (hole offset), $L123$ (hole radius), $L124$ (hole offset), $L125$ (hole radius), $L126$ (hole offset), $L127$ (hole radius), $L128$ (hole offset), $L129$ (hole radius), $L130$ (hole offset), $L131$ (hole radius), $L132$ (hole offset), $L133$ (hole radius), $L134$ (hole offset), $L135$ (hole radius), $L136$ (hole offset), $L137$ (hole radius), $L138$ (hole offset), $L139$ (hole radius), $L140$ (hole offset), $L141$ (hole radius), $L142$ (hole offset), $L143$ (hole radius), $L144$ (hole offset), $L145$ (hole radius), $L146$ (hole offset), $L147$ (hole radius), $L148$ (hole offset), $L149$ (hole radius), $L150$ (hole offset), $L151$ (hole radius), $L152$ (hole offset), $L153$ (hole radius), $L154$ (hole offset), $L155$ (hole radius), $L156$ (hole offset), $L157$ (hole radius), $L158$ (hole offset), $L159$ (hole radius), $L160$ (hole offset), $L161$ (hole radius), $L162$ (hole offset), $L163$ (hole radius), $L164$ (hole offset), $L165$ (hole radius), $L166$ (hole offset), $L167$ (hole radius), $L168$ (hole offset), $L169$ (hole radius), $L170$ (hole offset), $L171$ (hole radius), $L172$ (hole offset), $L173$ (hole radius), $L174$ (hole offset), $L175$ (hole radius), $L176$ (hole offset), $L177$ (hole radius), $L178$ (hole offset), $L179$ (hole radius), $L180$ (hole offset), $L181$ (hole radius), $L182$ (hole offset), $L183$ (hole radius), $L184$ (hole offset), $L185$ (hole radius), $L186$ (hole offset), $L187$ (hole radius), $L188$ (hole offset), $L189$ (hole radius), $L190$ (hole offset), $L191$ (hole radius), $L192$ (hole offset), $L193$ (hole radius), $L194$ (hole offset), $L195$ (hole radius), $L196$ (hole offset), $L197$ (hole radius), $L198$ (hole offset), $L199$ (hole radius), $L200$ (hole offset), $L201$ (hole radius), $L202$ (hole offset), $L203$ (hole radius), $L204$ (hole offset), $L205$ (hole radius), $L206$ (hole offset), $L207$ (hole radius), $L208$ (hole offset), $L209$ (hole radius), $L210$ (hole offset), $L211$ (hole radius), $L212$ (hole offset), $L213$ (hole radius), $L214$ (hole offset), $L215$ (hole radius), $L216$ (hole offset), $L217$ (hole radius), $L218$ (hole offset), $L219$ (hole radius), $L220$ (hole offset), $L221$ (hole radius), $L222$ (hole offset), $L223$ (hole radius), $L224$ (hole offset), $L225$ (hole radius), $L226$ (hole offset), $L227$ (hole radius), $L228$ (hole offset), $L229$ (hole radius), $L230$ (hole offset), $L231$ (hole radius), $L232$ (hole offset), $L233$ (hole radius), $L234$ (hole offset), $L235$ (hole radius), $L236$ (hole offset), $L237$ (hole radius), $L238$ (hole offset), $L239$ (hole radius), $L240$ (hole offset), $L241$ (hole radius), $L242$ (hole offset), $L243$ (hole radius), $L244$ (hole offset), $L245$ (hole radius), $L246$ (hole offset), $L247$ (hole radius), $L248$ (hole offset), $L249$ (hole radius), $L250$ (hole offset), $L251$ (hole radius), $L252$ (hole offset), $L253$ (hole radius), $L254$ (hole offset), $L255$ (hole radius), $L256$ (hole offset), $L257$ (hole radius), $L258$ (hole offset), $L259$ (hole radius), $L260$ (hole offset), $L261$ (hole radius), $L262$ (hole offset), $L263$ (hole radius), $L264$ (hole offset), $L265$ (hole radius), $L266$ (hole offset), $L267$ (hole radius), $L268$ (hole offset), $L269$ (hole radius), $L270$ (hole offset), $L271$ (hole radius), $L272$ (hole offset), $L273$ (hole radius), $L274$ (hole offset), $L275$ (hole radius), $L276$ (hole offset), $L277$ (hole radius), $L278$ (hole offset), $L279$ (hole radius), $L280$ (hole offset), $L281$ (hole radius), $L282$ (hole offset), $L283$ (hole radius), $L284$ (hole offset), $L285$ (hole radius), $L286$ (hole offset), $L287$ (hole radius), $L288$ (hole offset), $L289$ (hole radius), $L290$ (hole offset), $L291$ (hole radius), $L292$ (hole offset), $L293$ (hole radius), $L294$ (hole offset), $L295$ (hole radius), $L296$ (hole offset), $L297$ (hole radius), $L298$ (hole offset), $L299$ (hole radius), $L300$ (hole offset), $L301$

SIDE VIEW 1

TOP VIEW

SIDE VIEW 2
(Fr ont)


BOTTOM VIEW




END VIEW 1



END VIEW 2




Recommended






Alternate

Symbol	Millimeters	Inches
A	1.20	0.047
B	2.20	0.087
C	0.50	0.020
D	0.20	0.008
D1	0.40	0.016
E	0.20	0.008
F	0.30	0.012
F1	0.20	0.008
G	0.50 BSC	0.020 BSC
G1	1.00 BSC	0.039 BSC

Embossed Carrier Tape & Reel Specification — 1004 DFN Array





Section Y - Y

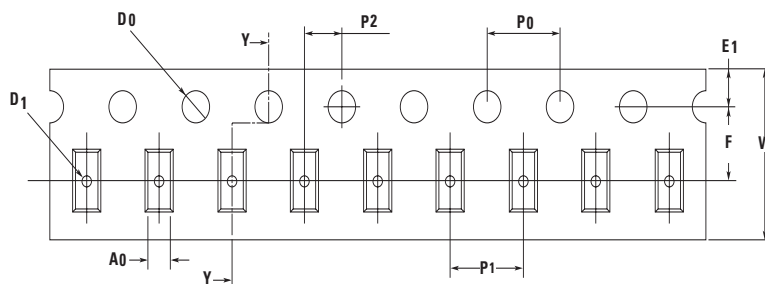

Symbol	Millimeters
A0	1.20+/-0.05
B0	2.70+/-0.05
D0	ø 1.50+0.10/-0
D1	ø 0.50 min
E1	1.75+/-0.10
F	3.50+/-0.05
K0	0.51+/-0.10
P0	4.00+/-0.10
P1	4.00+/-0.10
P2	2.00+/-0.05
W	8.00+0.30/-0.10
T	0.25+/-0.05

Package Dimensions — 1103 DFN Array

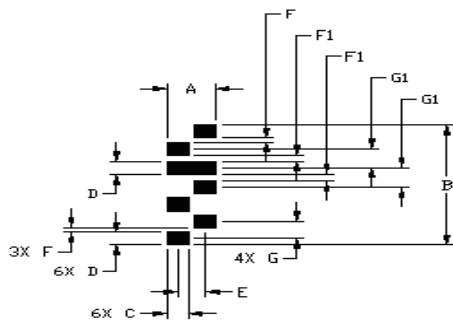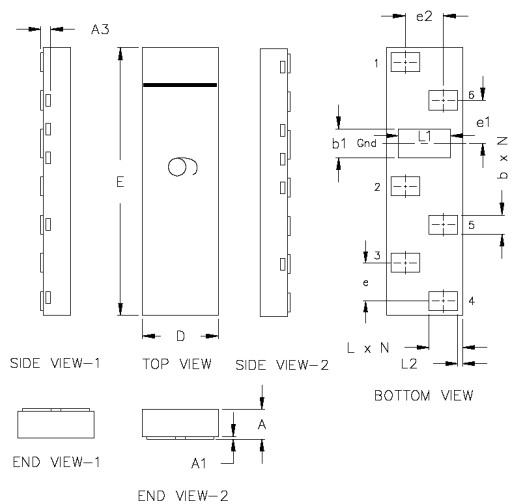


Pad Layout

Symbol	Millimeters			Inches		
	Min	Typ	Max	Min	Typ	Max
A	0.33	0.38	0.43	0.013	0.015	0.017
A1	0.00	0.02	0.05	0	—	0.002
A3	0.127 ref.			0.005 ref.		
D	0.70	0.80	0.90	0.027	0.031	0.035
E	2.70	2.80	2.90	0.106	0.110	0.114
b	0.15	0.20	0.25	0.006	0.008	0.010
b1	0.25	0.30	0.35	0.010	0.012	0.014
L	0.30	0.35	0.40	0.012	0.014	0.016
L1	0.50	0.55	0.60	0.019	0.021	0.024
L2	0.05 BSC			0.002 BSC		
e	0.40 BSC			0.016 BSC		
e1	0.45 BSC			0.018 BSC		
e2	0.40 BSC			0.016 BSC		
N	6			6		


Symbol	Millimeters	Inches
A	0.80	0.031
B	2.80	0.110
C	0.35	0.014
D	0.30	0.012
E	0.45	0.018
F	0.10	0.004
F1	0.15	0.006
G	0.40 BSC	0.016 BSC
G1	0.45 BSC	0.018 BSC

Embossed Carrier Tape & Reel Specification — 1103 DFN Array

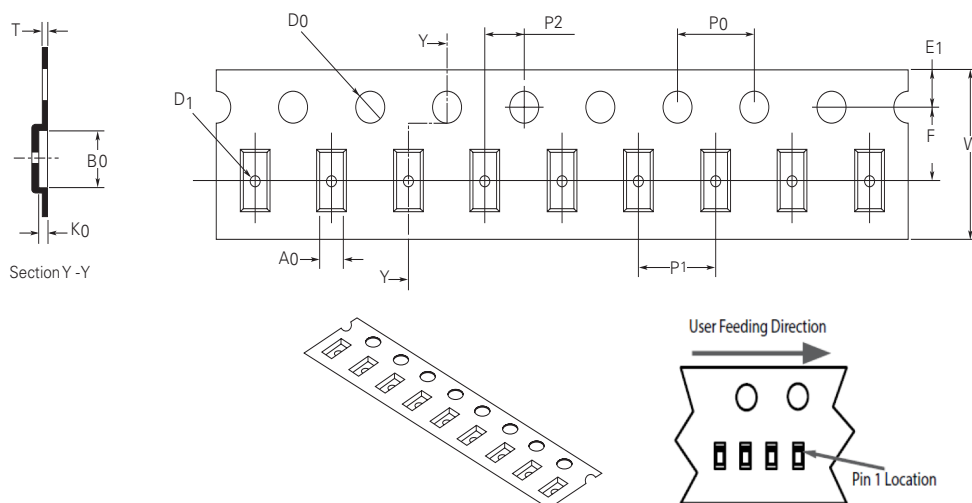


Symbol	Millimeters
A0	1.00+/-0.05
B0	3.00+/-0.05
D0	ø 1.50+0.10/-0
D1	ø 0.50 min
E1	1.75+/-0.10
F	3.50+/-0.05
K0	0.51+/-0.05
P0	4.00+/-0.10
P1	4.00+/-0.10
P2	2.00+/-0.05
W	8.00+0.30/-0.10
T	0.25+/-0.05

Part Numbering System

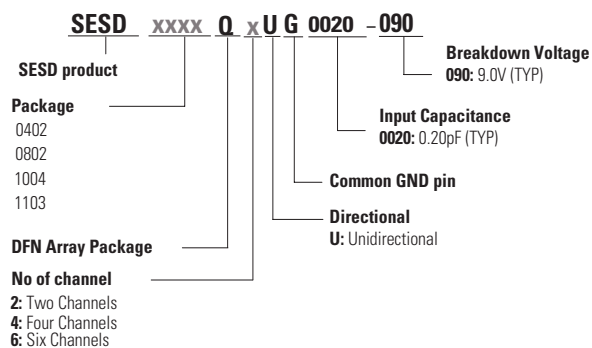

Part Marking System

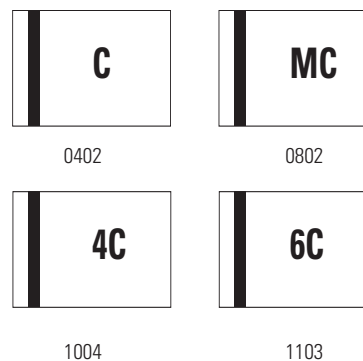

Ordering Information

Part Number	Package	Ordering Part Number	Minimum Order Quantity
SESD0402Q2UG-0020-090	0402 DFN Array	RF2946-000	50,000
SESD0802Q4UG-0020-090	0802 DFN Array	RF3076-000	25,000
SESD1004Q4UG-0020-090	1004 DFN Array	RF3077-000	25,000
SESD1103Q6UG-0020-090	1103 DFN Array	RF3078-000	25,000