




.250 (6.4) TAB




CAT. NO.	MATERIAL	MTG. HOLES
1287	.032 (.81) Brass, Tin Plate	.052 (1.3) Dia.

NOTE: see page 66 for continuous reel packaging

.250 (6.4) TAB


STURDI-MOUNT



CAT. NO.	MATERIAL	MTG. HOLES
1287-ST	.032 (.81) Brass, Tin Plate	.052 (1.3) Dia.

NOTE: see page 66 for continuous reel packaging


DUAL .110 (2.8)/.250 (6.4) TAB



CAT. NO.	MATERIAL	MTG. HOLES
1282	.032 (.81) Brass, Tin Plate	.052 (1.3) Dia.

.250 (6.4) TAB

STURDI-MOUNT




MATERIAL: .032 (.81) Brass, Matte Tin Plate

CAT. NO.	ANGLE A	MTG. HOLES
4901	0°	.067 (1.7) Dia.
4914	90°	

.250 (6.4) TAB


STURDI-MOUNT



CAT. NO.	MATERIAL	MTG. HOLES
4902	.032 (.81) Brass, Tin Plate	.067 (1.7) Dia.

.250 (6.4) TAB


STURDI-MOUNT

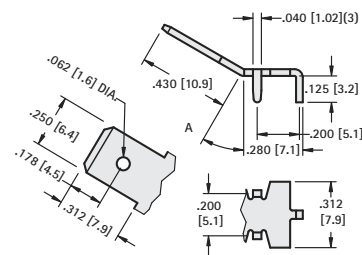

MATERIAL: .032 (.81) Brass, Matte Tin Plate

CAT. NO.	ANGLE A	MTG. HOLES
4910	0°	.052 (1.3) Dia.
4908	30°	
4912	60°	

.250 (6.4) TAB




MATERIAL: .032 (.81) Brass, Matte Tin Plate

CAT. NO.	"L"	MTG. HOLES
1289	.540 (13.7)	.052 (1.3) Dia.
1203	.657 (16.7)	
1292	.710 (18.0)	
1225	1.039 (26.4)	

.250 (6.4) TAB


STURDI-MOUNT

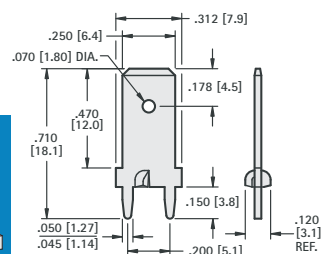

CAT. NO.	MATERIAL	MTG. HOLES
1289-ST	.032 (.81) Brass, Tin Plate	.052 (1.3) Dia.


NOTE: see page 66 for continuous reel packaging

.250 (6.4) TAB




CAT. NO.	MATERIAL	MTG. HOLES
1281	.032 (.81) Brass, Tin Plate	.052 (1.3) Dia.

.250 (6.4) TAB

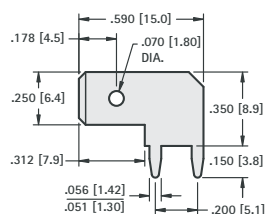


CAT. NO.	MATERIAL	MTG. HOLES
4966	.032 (.81) Brass, Tin Plate	.056 (1.4) Dia.

.250 (6.4) TAB



CAT. NO.	MATERIAL	MTG. HOLES
1266	.032 (.81) Brass, Tin Plate	.052 (1.3) Dia.

.250 (6.4) TAB

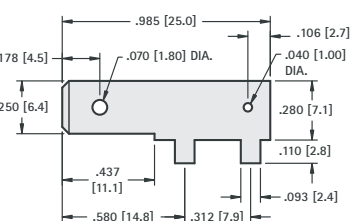

CAT. NO.	MATERIAL	MTG. HOLES
1265*	.032 (.81) Brass, Tin Plate	.106 (2.7) Dia.

* Not UL Recognized





Underwriters Laboratories, Inc.
Recognized Component Program —
UL File Number E201546




UL file number E201546 has been assigned to Keystone Electronics' "Quick-Fit" terminals (Refer to pages 64-68) indicating recognition by Underwriters Laboratories Inc. that they are in compliance with their component program.

Underwriters Laboratories Inc. component program assures that "Quick-Fit" terminals meet the dimensional and performance requirements of the National Electrical Manufacturers Association specification number NEMA2-1982-(1988) and UL310.

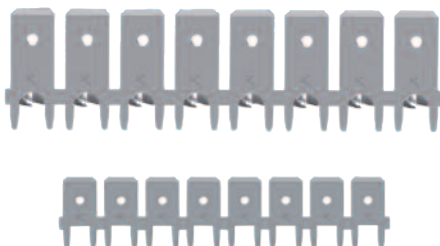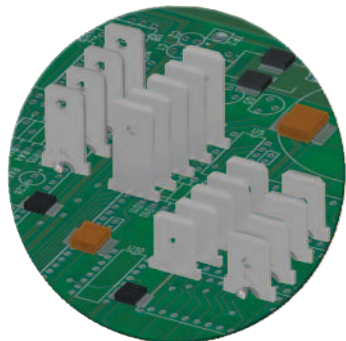

• Supplied in continuous reel for automated pick and place insertion

.250 (6.4) TAB




CAT. NO.	MATERIAL	MTG. HOLES
1287-R	.032 (.81) Brass, Tin Plate	.052 (1.3) Dia.

Tape & Reel Spec's: 12,500 per 15 inch reel

.250 (6.4) TAB

STURDI-MOUNT





CAT. NO.	MATERIAL	MTG. HOLES
1287-STR	.032 (.81) Brass, Tin Plate	.052 (1.3) Dia.

Tape & Reel Spec's: 15,000 per 24 inch reel

.250 (6.4) TAB

STURDI-MOUNT

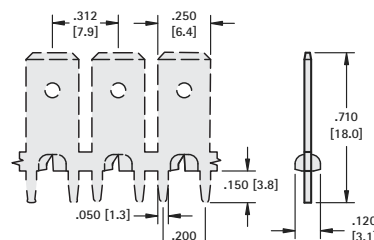


CAT. NO.	MATERIAL	MTG. HOLES
1289-STR	.032 (.81) Brass, Tin Plate	.052 (1.3) Dia.

Tape & Reel Spec's: 15,000 per 24 inch reel

BULK .250 (6.4) PC QUICK-FIT MALE TABS




.250 (6.4) TAB



CAT. NO.	MATERIAL	MTG. HOLES
1287	.032 (.81) Brass, Tin Plate	.052 (1.3) Dia.


.250 (6.4) TAB

STURDI-MOUNT

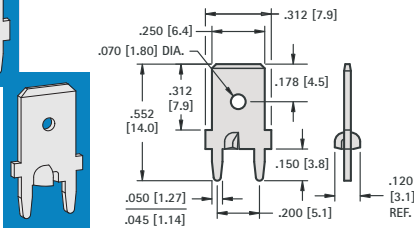


CAT. NO.	MATERIAL	MTG. HOLES
1287-ST	.032 (.81) Brass, Tin Plate	.052 (1.3) Dia.

.250 (6.4) TAB

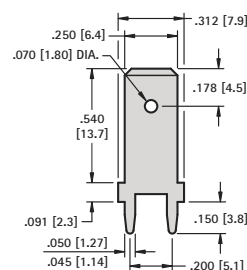

CAT. NO.	MATERIAL	MTG. HOLES
1289	.032 (.81) Brass, Tin Plate	.052 (1.3) Dia.

SMT .250 (6.4) QUICK-FIT TERMINALS

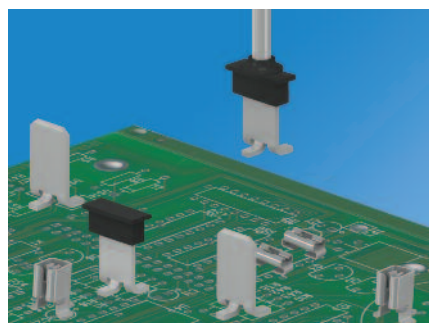

AVAILABLE ON TAPE AND REEL



- Designed for automated assembly processing
- Available on tape and reel for automated assembly. Pick-up cap added to reeled parts to accommodate vacuum pick and place assembly
- Reflow solder compatible. Plastic pick-up cap will survive reflow temperatures

CAT. NO.	ON TAPE & REEL	MATERIAL
4928*	4928TR*	.032 (.81) Brass, Tin Plate


Tape & Reel Spec's: 16mm wide, 12mm pitch, 13 inch reel (750 pieces per reel)

.250 (6.4) TAB

VERTICAL - MALE



Mounting Detail



.250 (6.4) "STURDI-MOUNT" PC QUICK-FIT HEADERS

AVAILABLE IN BRASS OR STEEL TABS

- Ideal for rugged multi-insertion applications
- Pre-assembled header reduces PC assembly costs
- Increases PC board retention strength
- Keeps terminals perpendicular
- Maintains position for wave soldering

SPECIFICATIONS


Material: .032 (.81) Brass or Steel, Tin Plated

Insulator: Thermoplastic, UL Rated 94V-0

Current Rating: 15 Amps @ 500V AC


Temperature Rating: -58°F to +292°F (-50°C to +145°C)

HORIZONTAL

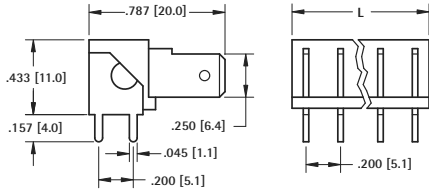



BRASS TABS	STEEL TABS	NO. OF TABS	L DIM.
CAT. NO.	CAT. NO.		
7802	7822	2	.362 (8.2)
7803	7823	3	.562 (14.3)
7804	7824	4	.762 (19.4)
7805	7825	5	.962 (24.4)
7806	7826	6	1.162 (29.5)

VERTICAL



BRASS TABS	STEEL TABS	NO. OF TABS	L DIM.
CAT. NO.	CAT. NO.		
7812	7832	2	.362 (8.2)
7813	7833	3	.562 (14.3)
7814	7834	4	.762 (19.4)
7815	7835	5	.962 (24.4)
7816	7836	6	1.162 (29.5)

LOW PROFILE

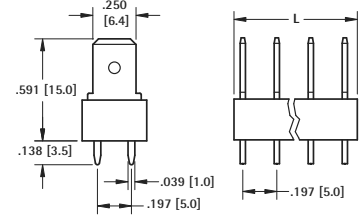

BRASS TABS	STEEL TABS	NO. OF TABS	L DIM.
CAT. NO.	CAT. NO.		
7817	7827	2	.320 (.81)
7818	7828	3	.517 (13.1)
7819	7829	4	.713 (18.1)
7820	7830	5	.910 (23.1)
7821	7831	6	1.107 (28.1)



RIVET MOUNT QUICK-FIT TERMINALS



- UL recognized bright brass Quick-Fit terminals
- Rivet mount male tab versions meet NEMA 2-E201546 & UL 310 specifications



- Designed for repeated mating cycles
- For tabs 0.110 (2.8mm) to 0.250 (6.4mm)

.110 (2.8) - .187 (4.8) - .250 (6.4) TABS




BRIGHT BRASS						MATTE TIN			
A = 45°	A = 90°	TAB SIZE	MAT'L THICK	TAB	W	HOLE DIA.	A = 45°	A = 90°	
CAT. NO.	CAT. NO.						CAT. NO.	CAT. NO.	
2004	2002	.110 (2.8)	.020 (.51)	.365 (9.3)	.180 (4.6)	.096 (2.4)	1233	1220	
1271	1261	.187 (4.8)	.020 (.51)	.375 (9.5)	.250 (6.4)	.100 (2.5)	1234	1221	
1280	1256	.250 (6.4)	.032 (.81)	.406 (10.3)	.306 (7.8)	.130 (3.3)	1235	1222	

.110 (2.8) - .187 (4.8) - .250 (6.4) TABS



BRIGHT BRASS						MATTE TIN			
A = 45°	A = 90°	TAB SIZE	MAT'L THICK	TAB	W	HOLE DIA.	A = 45°	A = 90°	
CAT. NO.	CAT. NO.						CAT. NO.	CAT. NO.	
2005	2003	.110 (2.8)	.020 (.51)	.360 (9.1)	.180 (4.6)	.096 (2.4)	1240	1227	
1263	1262	.187 (4.8)	.020 (.51)	.315 (8.0)	.250 (6.4)	.100 (2.5)	1241	1228	
1258	1257	.250 (6.4)	.032 (.81)	.400 (10.1)	.306 (7.8)	.130 (3.3)	1242	1229	


.110 (2.8) TAB



MATERIAL: .020 (.51) Brass, Tin Plated

CAT. NO.	ANGLE
1269	0°
1270	30°



.187 (4.8) - .205 (6.4) TABS



45° TAB MATERIAL: .020 (.51) Brass, Tin Plated

CAT. NO.	TAB	HOLE
4005	.205 (5.2)	.132 (3.4) x .070 (1.78) Slot
4095	.187 (4.7)	.078 (1.98) Dia. Hole

MULTIPLE .250 (6.4) TAB



BRIGHT BRASS MATERIAL: .032 (.81) Bright Brass			
CAT. NO.	PAIRS	L	TAB SIZE
1005	2	.687 (17.4)	.250 (6.4)
1006	3	1.062 (27.0)	.250 (6.4)
1007	4	1.441 (36.6)	.250 (6.4)
1008	5	1.820 (46.2)	.250 (6.4)