Maximum Ratings (@T_A = +25°C, unless otherwise specified.)

Characteristic		Symbol	Value	Unit
Supply Voltage <Pin: (3) to (2)>		V_{CC}	50	V
Input Voltage <Pin: (1) to (2)>	DDTA123EE DDTA143EE DDTA114EE DDTA124EE DDTA144EE DDTA115EE	V_{IN}	+10 to -12 +10 to -30 +10 to -40 +10 to -40 +10 to -40 +10 to -40	V
Output Current	DDTA123EE DDTA143EE DDTA114EE DDTA124EE DDTA144EE DDTA115EE	I_O	-100 -100 -50 -30 -30 -20	mA
Output Current		I_C (Max)	-100	mA

Thermal Characteristics (@T_A = +25°C, unless otherwise specified.)

Characteristic	Symbol	Value	Unit
Power Dissipation (Note 5 & 6)	P_D	150	mW
Thermal Resistance, Junction to Ambient Air (Note 5)	$R_{\theta JA}$	833	°C/W
Operating and Storage Temperature Range	T_J, T_{STG}	-55 to +150	°C

Electrical Characteristics (@T_A = +25°C, unless otherwise specified.)

Characteristic		Symbol	Min	Typ	Max	Unit	Test Condition
Input Voltage		$V_{I(OFF)}$	-0.5	-1.1	—	V	V_{CC} = -5V, I_O = -100µA
		$V_{I(ON)}$	—	-1.9	-3		V_O = -0.3V, I_O = -20mA, DDTA123EE V_O = -0.3V, I_O = -20mA, DDTA143EE V_O = -0.3V, I_O = -10mA, DDTA114EE V_O = -0.3V, I_O = -5mA, DDTA124EE V_O = -0.3V, I_O = -2mA, DDTA144EE V_O = -0.3V, I_O = -1mA, DDTA115EE
Output Voltage		$V_{O(ON)}$	—	-0.1	-0.3	V	I_O/I_I = -10mA/-0.5mA DDTA123EE I_O/I_I = -10mA/-0.5mA DDTA143EE I_O/I_I = -10mA/-0.5mA DDTA114EE I_O/I_I = -10mA/-0.5mA DDTA124EE I_O/I_I = -10mA/-0.5mA DDTA144EE I_O/I_I = -5mA/-0.25mA DDTA115EE
Input Current	DDTA123EE DDTA143EE DDTA114EE DDTA124EE DDTA144EE DDTA115EE	I_I	—	—	-3.8 -1.8 -0.88 -0.36 -0.18 -0.15	mA	V_I = -5V
Output Current		$I_{O(OFF)}$	—	—	-0.5	µA	V_{CC} = -50V, V_I = 0V
DC Current Gain	DDTA123EE DDTA143EE DDTA114EE DDTA124EE DDTA144EE DDTA115EE	G_I	-20 -20 -30 -56 -68 -82	—	—	—	V_O = -5V, I_O = -20mA V_O = -5V, I_O = -10mA V_O = -5V, I_O = -5mA V_O = -5V, I_O = -5mA V_O = -5V, I_O = -5mA V_O = -5V, I_O = -5mA
Input Resistor Tolerance		ΔR_1	-30	—	+30	%	—
Resistance Ratio Tolerance		$\Delta R_2/R_1$	0.8	1	1.2	%	—
Gain-Bandwidth Product (Note 7)		f_T	—	250	—	MHz	V_{CE} = -10V, I_E = 5mA, f = 100MHz

Notes: 5. Mounted on FR-4 PC Board with minimum recommended pad layout.
6. 150mW per element must not be exceeded.
7. Transistor only.

© Diodes Incorporated
Downloaded from Arrow.com.

Typical Electrical Characteristics – DDTA143EE

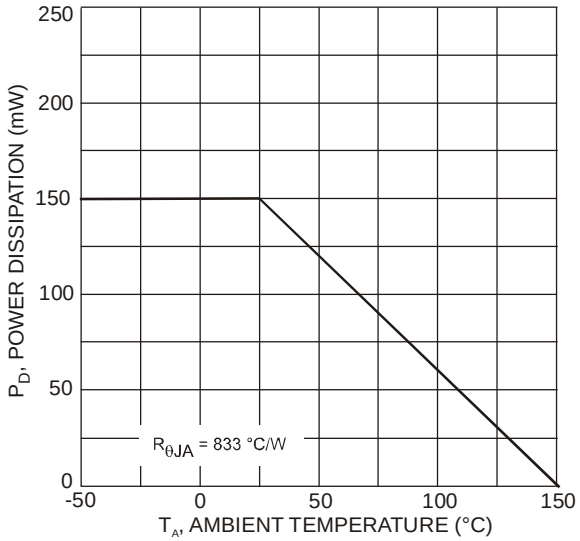

Figure 1 Power Dissipation vs. Ambient Temperature

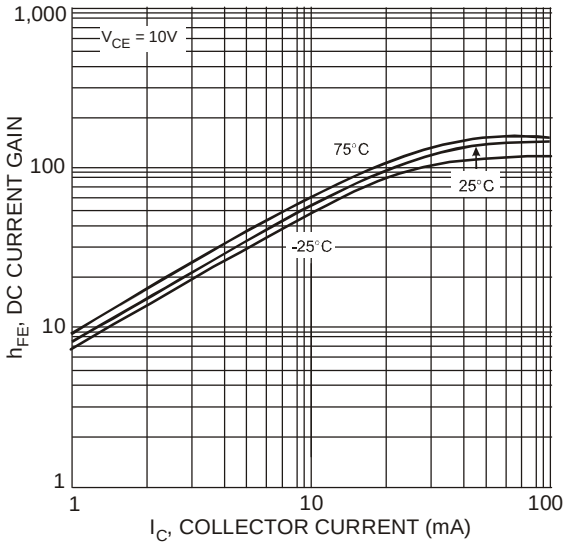

Figure 2 Typical DC Current Gain vs. Collector Current

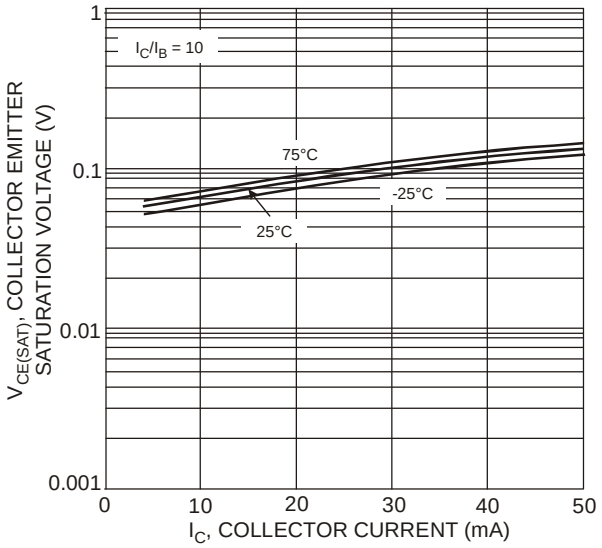

Figure 3 Typical Collector Emitter Saturation Voltage vs. Collector Current

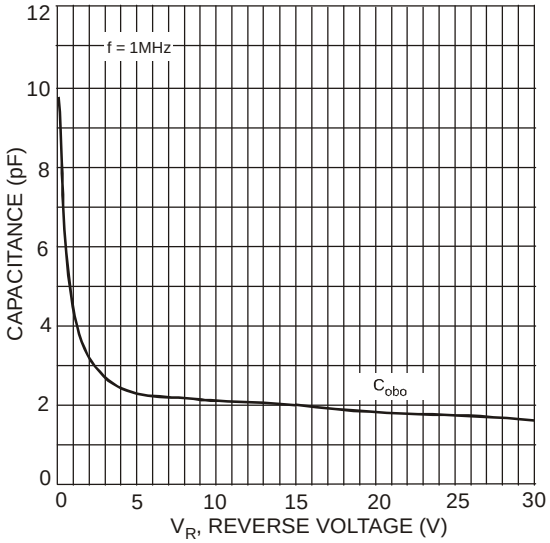

Figure 4 Typical Capacitance Characteristics

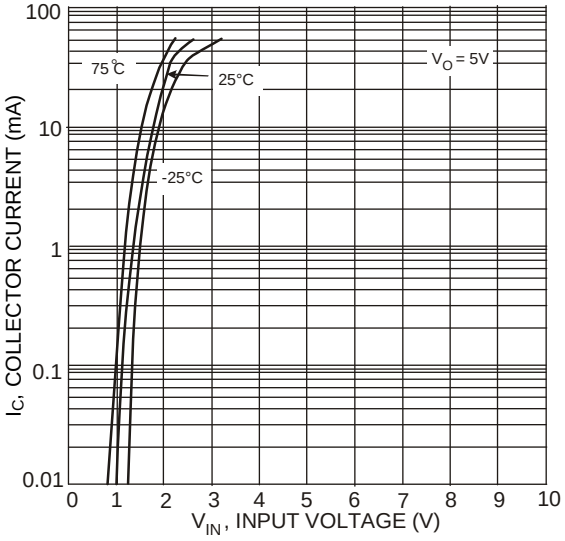

Figure 5 Collector Current vs. Input Voltage

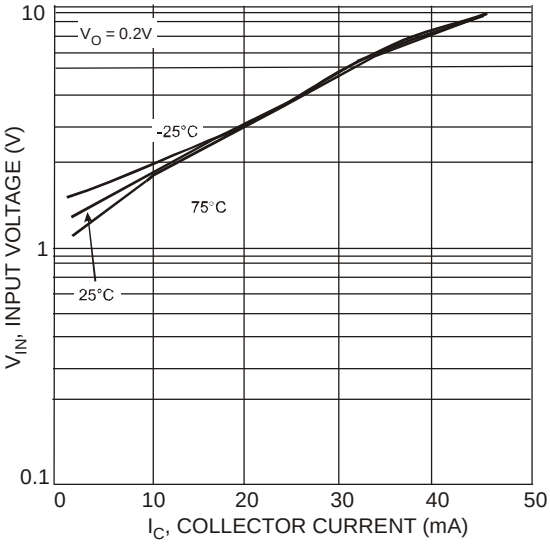

Figure 6 Input Voltage vs. Collector Current

© Diodes Incorporated

Downloaded from Arrow.com.

Package Outline Dimensions

Please see http://www.diodes.com/package-outlines.html for the latest version.

SOT523

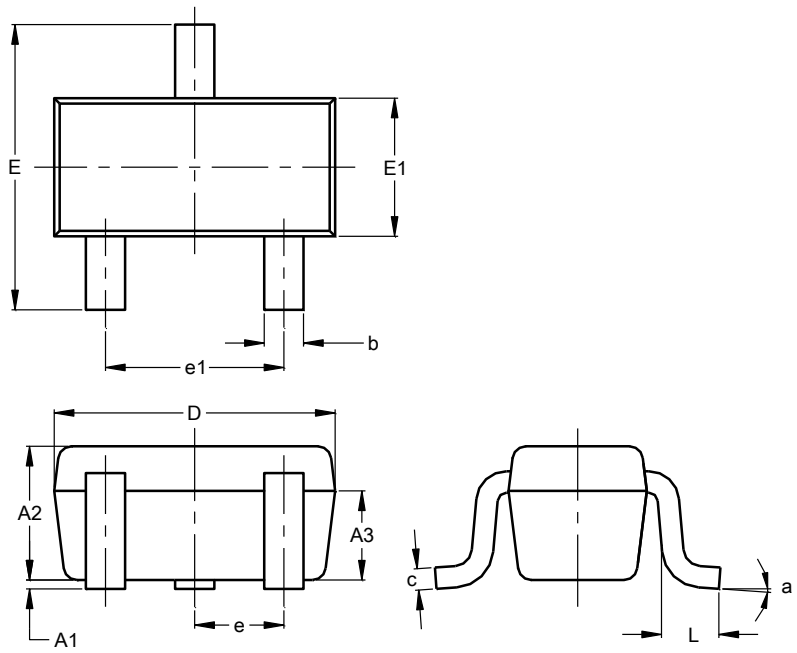

SOT523			
Dim	**Min**	**Max**	**Typ**
A1	0.00	0.10	0.05
A2	0.60	0.80	0.75
A3	0.45	0.65	0.50
b	0.15	0.30	0.22
c	0.10	0.20	0.12
D	1.50	1.70	1.60
E	1.45	1.75	1.60
E1	0.75	0.85	0.80
e	0.50 BSC		
e1	0.90	1.10	1.00
L	0.20	0.40	0.33
a	0°	--	8°
All Dimensions in mm			

Suggested Pad Layout

Please see http://www.diodes.com/package-outlines.html for the latest version.

SOT523

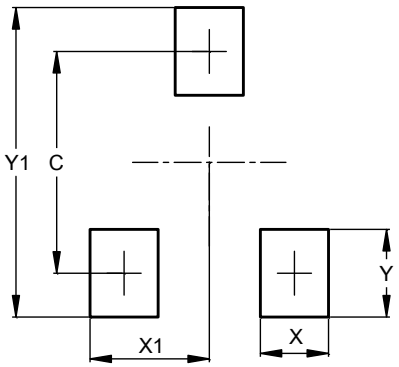

Dimensions	Value (in mm)
C	1.29
X	0.40
X1	0.70
Y	0.51
Y1	1.80

© Diodes Incorporated

Downloaded from Arrow.com.

IMPORTANT NOTICE

DIODES INCORPORATED MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARDS TO THIS DOCUMENT, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION).

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein. Diodes Incorporated does not assume any liability arising out of the application or use of this document or any product described herein; neither does Diodes Incorporated convey any license under its patent or trademark rights, nor the rights of others. Any Customer or user of this document or products described herein in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on Diodes Incorporated website, harmless against all damages.

Diodes Incorporated does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel. Should Customers purchase or use Diodes Incorporated products for any unintended or unauthorized application, Customers shall indemnify and hold Diodes Incorporated and its representatives harmless against all claims, damages, expenses, and attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized application.

Products described herein may be covered by one or more United States, international or foreign patents pending. Product names and markings noted herein may also be covered by one or more United States, international or foreign trademarks.

This document is written in English but may be translated into multiple languages for reference. Only the English version of this document is the final and determinative format released by Diodes Incorporated.

LIFE SUPPORT

Diodes Incorporated products are specifically not authorized for use as critical components in life support devices or systems without the express written approval of the Chief Executive Officer of Diodes Incorporated. As used herein:

A. Life support devices or systems are devices or systems which:

1. are intended to implant into the body, or
2. support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in significant injury to the user.

B. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or to affect its safety or effectiveness.

Customers represent that they have all necessary expertise in the safety and regulatory ramifications of their life support devices or systems, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of Diodes Incorporated products in such safety-critical, life support devices or systems, notwithstanding any devices- or systems-related information or support that may be provided by Diodes Incorporated. Further, Customers must fully indemnify Diodes Incorporated and its representatives against any damages arising out of the use of Diodes Incorporated products in such safety-critical, life support devices or systems.

Copyright © 2018, Diodes Incorporated

www.diodes.com

Downloaded from Arrow.com.