

**UNCONTROLLED
DOCUMENT**

ELECTRICAL CHARACTERISTICS:

Z @ 100MHz (Ω)	DCR (Ω)	Rated Current
Nominal	31	
Minimum	23	
Maximum	39	1500 mA




AGILENT E4991A RF Impedance/Material Analyzer
HP 16194A Test Fixture. TEST REF. 3227

(For wave soldering, add 0.762
(.030) to this dimension)

LAND PATTERNS FOR REFLOW SOLDERING

RECOMMENDED SOLDERING CONDITIONS

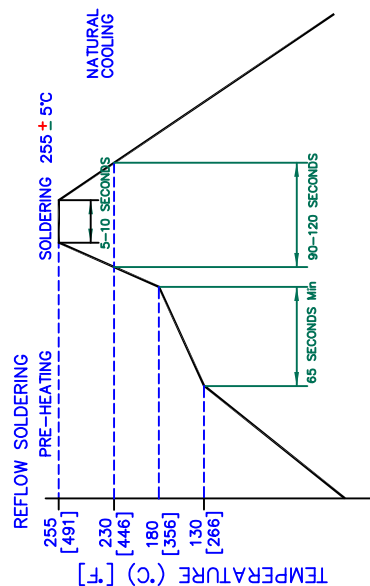

DIMENSIONS ARE IN mm [INCHES]		This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.			
REV	A	DESCRIPTION	DATE	SCALE	SHEET:
	B	UPDATE COMPANY LOGO	04/13/04	04/13/04	2 of 2
	C	ADD OPERATING TEMPERATURE UPDATE LAIRD LOGO AND REFLOW CURVE	08/05/13	QU	
PROJECT/PART NUMBER:			REV	PART TYPE:	DRAWN BY:
			M11206K310R-10	C	CO-FIRE
					JRK