

UNCONTROLLED DOCUMENT

LEAD FREE REFLOW PROFILE

PART NUMBER	SML-LX1210IGC-TR	REV.	J
DATE	E.C.N. NUMBER AND REVISION COMMENTS		REV.
N/A	FOR REVISION HISTORY PLEASE SEE PAGE 1		N/A

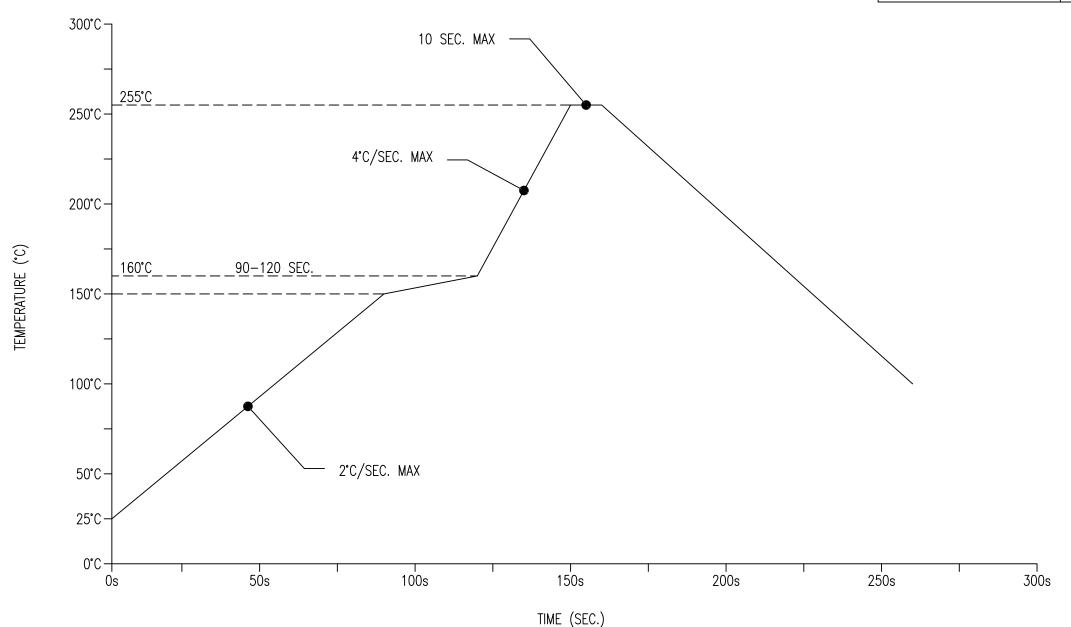

TOTAL TIME ABOVE 220°C IS 60 SECONDS MAX.

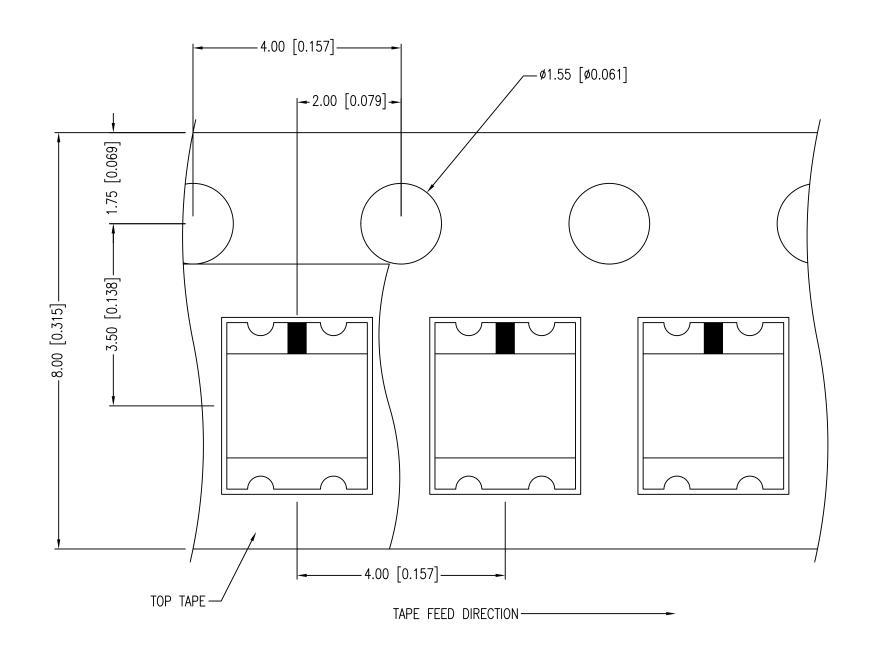

NOTES:

- 1. THE CATHODE IS ORIENTED TOWARDS THE TAPE SPROCKET HOLE.
- 2. LOCATION FOR CATHODE MARK CAN BE EITHER ON THE TOP OR BOTTOM OF THE PART.

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= $^{+DECIMAL}_{-0.00}$ PRECISION MAX.= $^{+0.00}_{-0.00}$ PRECISION UNCONTROLLED DOCUMENT



425 N. GARY AVE. CAROL STREAM, IL 60188-4900 PHONE: 800-278-5666 FAX: 630-315-2152

2.7x 3.2mm P.C.B. SURFACE MOUNT LED, DUAL RED/GREEN CHIPS, WATER CLEAR LENS, TAPE & REEL.

THE SPECIFICATIONS MAY CHANGE AT ANY TIME WITHOUT NOTICE.

CONFIDENTIAL INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

DATE: 11.07.18 DRAWN BY: C.S. PAGE: 2 OF 2 CHKD BY: E.C. SCALE: NTS APRVD BY: G.Y. Pb UNIT: mm [INCH]