


PRODUCT NO.	"A"	"B"	PLATING
88333-040	38	40.8	
044	42	44.8	
050	48	50.8	
88333-150	48	50.8	
88333-440LF	38	40.8	
444LF	42	44.8	
450LF	48	50.8	
88333-140LF	38	40.8	
144LF	42	44.8	
150LF	48	50.8	
88333-040LF	38	40.8	
044LF	42	44.8	
050LF	48	50.8	

OBSOLETE
OBSOLETE
OBSOLETE
OBSOLETE

SEE NOTE
SEE NOTE
SEE NOTE
CUSTOMER SPECIAL

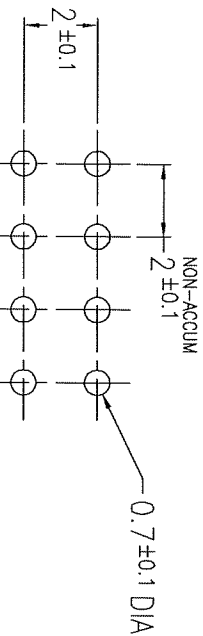

RECOMMENDED MOUNTING HOLE LAYOUT

NOTE:
① MATERIAL:HOUSING G.F.PBT
UL 94V-0. BLACK
TERMINAL PHOSPHOR BRONZE.


② 88333 - X XX

40, 44, 50 : 2X20, 2X22, 2X25
NUMBER OF CONTACTS:
0 :CONTACT AREA GOLD 0.2umMIN.
SOLDER TAIL PURE-TIN 2umMIN.
CONTACT AREA GOLD 0.76umMIN.
SOLDER TAIL PURE-TIN 2umMIN.

LF PRODUCT NUMBER MEETS EUROPIAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
40, 44, 50 : 2X20, 2X22, 2X25
NUMBER OF CONTACTS.

1 :CONTACT AREA GOLD 0.76umMIN.
SOLDER TAIL PURE-TIN 2umMIN.
4 :CONTACT AREA GOLD 0.2umMIN.
SOLDER TAIL PURE-TIN 2umMIN.
0 : CUSTOMER SPECIAL PART NUMBER
CONTACT AREA GOLD 0.2umMIN.
SOLDER TAIL Sn-Cu 1.5umMIN.

- ③ CUT SURFACE IS UNPLATED.
- ④ GENERAL TOLERANCE:±0.25
- ⑤ FEATURE OF 2X25 POSITIONS : SEE FIG.1.
- ⑥ PRODUCT NUMBERS WITH "LF" SUFFIX WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN WAVE SOLDER, INFRA-RED OR VAPOR PHASE SOLDER PROCESS.

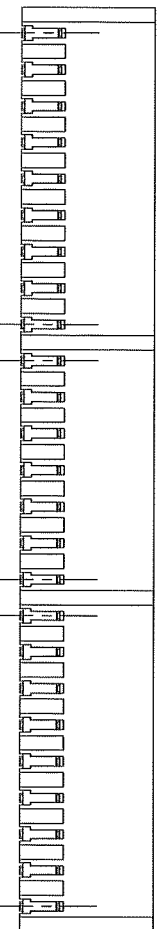

STAND-OFF FEATURE OF 2X25 POSITIONS.
© FIG.1

(SCALE 2.5/1)

mat'l. code	surface	tolerance	projection	product family	CODE
SEE_NOTE_1	ISO 1302	ISO 406	ISO 1101	5MMF - MINITEK RECEPTACLE	JP
ltr description	ecn no	dr	ddte	angles	linear
D REVISED	005-0576	R.S	2006-1-31	0.X	±0.25
E REVISED	006-0115	R.S	2006-4-16	0.XX	±0.25
F REVISED	006-0352	R.S	2006-8-29	0.XXX	±0.25
G REVISED	008-0471	S.W	2008-12-8	scale 5:1	
H REVISED	010-0118	S.W	2010-5-7	engr	206-7-15
J REVISED	010-0192	S.W	2010-7-15	chr	206-7-15
sheet index	revision	J	1	pppd	Ind 15/10



MINITEK HCC

dwg no 88333 sheet 1 of 1 size A3

type Product Customer Drawing Rev.



FCIconnect.com

Copyright FCI.

Form: A3