

Absolute Maximum Ratings

Symbol	Parameter	Value	Units
I_{DC}	DC Current Per Line	100	mA
P_{DC}	DC Package Power Rating	0.5	W
T_{OP}	Operating Temperature	-40 to 125	°C
T_{STOR}	Storage Temperature	-55 to 150	°C

CAUTION: Stresses above those listed in "Absolute Maximum Ratings" may cause permanent damage to the component. This is a stress only rating and operation of the component at these or any other conditions above those indicated in the operational sections of this specification is not implied.


Electrical Characteristics ($T_{OP}=25^{\circ}\text{C}$)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Units
Channel Resistance	R_{CH}	Pins 1–10, 2–9, 4–7 and 5–6		8.0		Ω
Total Channel Capacitance	C_{TOTAL}	$V_{IO} = 1.65V_{DC}$ Reverse Bias; $f=1\text{MHz}$, 30mV_{AC}		0.8	1.3	pF
Reverse Standoff Voltage	V_{RWM}				5.0	V
Breakdown Voltage	V_{BR}	$I_T=1\text{mA}$	6.0	8.0	10.0	V
Forward Voltage at I_F	V_F	$I_F=1\text{mA}$	0.4	0.7	1.5	V
Reverse Leakage Current	I_{LEAK}	$V_{IO}=3.3\text{V}$		0.01	0.10	μA
Dynamic Resistance ^{2 3}	R_{DYN}	Positive ($t_p=8/20\mu\text{s}$)		1.3		Ω
		Negative ($t_p=8/20\mu\text{s}$)		0.7		
		TLP, $t_p=100\text{ns}$, I/O to GND		0.36		
ESD Withstand Voltage ^{1 2}	V_{ESD}	IEC 61000-4-2 (Contact Discharge)	± 15			kV
		IEC 61000-4-2 (Air Discharge)	± 30			kV
Differential Mode Cutoff Frequency ²	F_{3dB}	$Z_{SOURCE}=50\Omega$, $Z_{LOAD}=50\Omega$		2.5		GHz
Common Mode Stop Band Attenuation ²	F_a	$f=800\text{MHz}$		30		dB


Notes:

- ESD zapping at I/O pins (1,2,4,5) with respect to GND.
- Guaranteed by design.
- Transmission Line Pulse (TLP) with 100ns width and 200ps rise time.


Differential Mode Attenuation SDD21 vs. Frequency ($Z_{diff} = 100\Omega$)

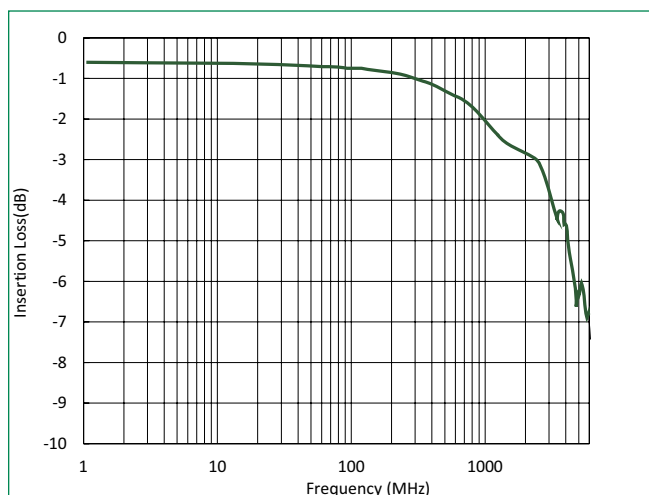


Common Mode Attenuation SCC21 vs. Frequency ($Z_{comm}= 50\Omega$)

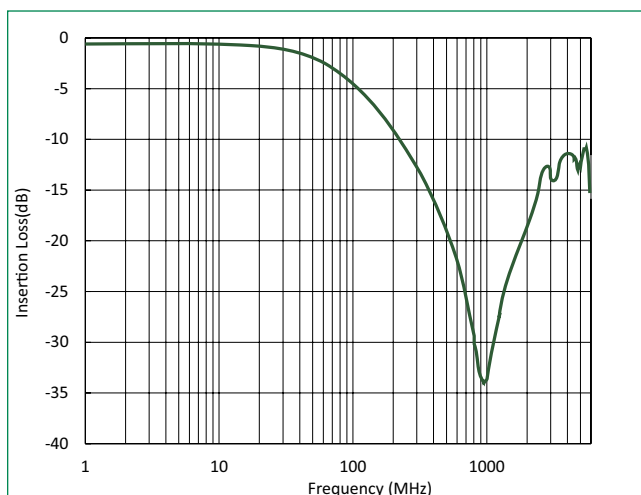


Differential Return Loss SDD11 vs. Frequency (Zdiff = 100Ω)

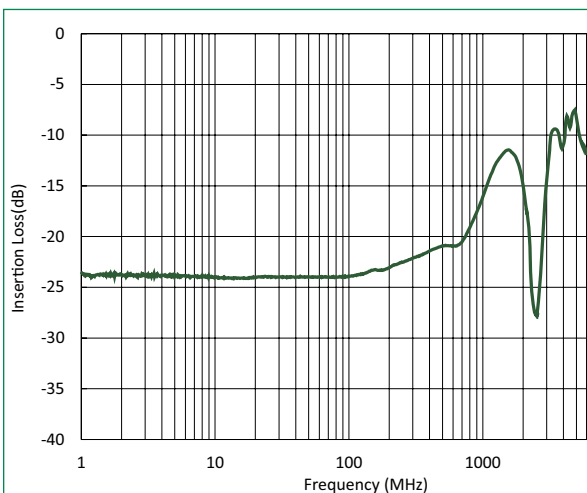


Differential Return Loss SDD22 vs. Frequency (Zdiff = 100Ω)

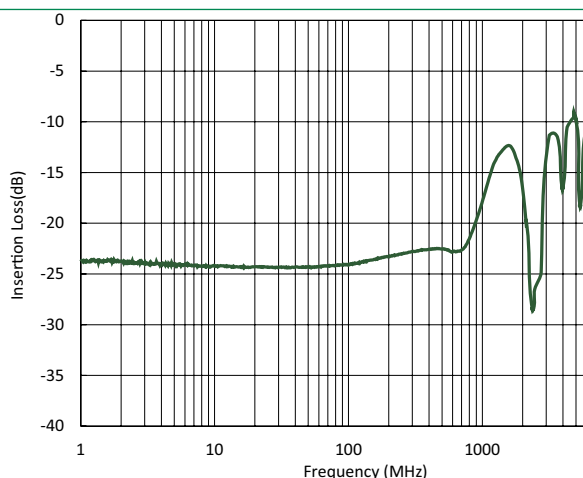


Transmission Line Pulsing (TLP) Plot

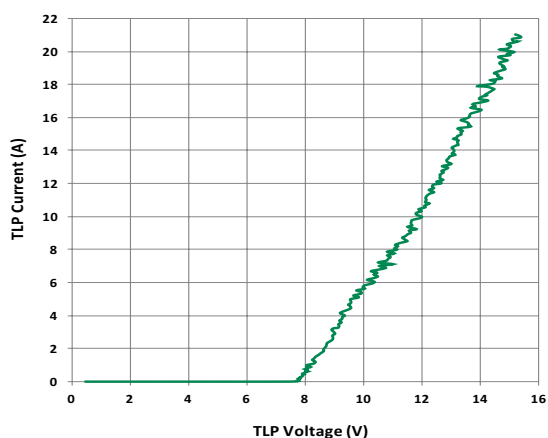

Part Numbering System

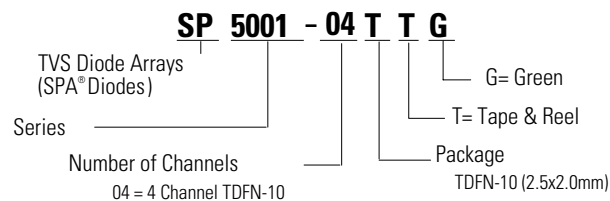

Part Marking System

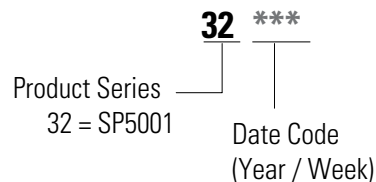


Soldering Parameters

Reflow Condition		Pb – Free assembly
Pre Heat	- Temperature Min ($T_{s(min)}$)	150°C
	- Temperature Max ($T_{s(max)}$)	200°C
	- Time (min to max) (t_s)	60 – 180 secs
Average ramp up rate (Liquidus) Temp (T_L) to peak		3°C/second max
$T_{s(max)}$ to T_L - Ramp-up Rate		3°C/second max
Reflow	- Temperature (T_L) (Liquidus)	217°C
	- Temperature (t_L)	60 – 150 seconds
Peak Temperature (T_p)		260 ^{+0/-5} °C
Time within 5°C of actual peak Temperature (t_p)		20 – 40 seconds
Ramp-down Rate		6°C/second max
Time 25°C to peak Temperature (T_p)		8 minutes Max.
Do not exceed		260°C

Ordering Information

Part Number	Package	Size	Min. Order Qty.
SP5001-04TTG	TDFN-10	2.5x2.0mm	3000

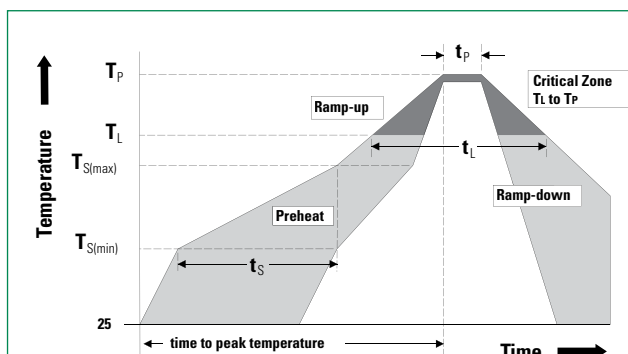

Symbol	TDFN-10			
	JEDEC MO-229			
	Millimeters		Inches	
	Min	Max	Min	Max
A	0.70	0.80	0.028	0.031
A1	0.00	0.05	0.000	0.002
A3	0.2 REF		0.008 REF	
b	0.15	0.25	0.006	0.010
D	2.50 BSC		0.098 BSC	
E	2.00 BSC		0.079 BSC	
e	0.50 BSC		0.020 BSC	
L	0.70	0.90	0.028	0.035
L1	0.05	0.15	0.002	0.006

Symbol	Dimensions
	Millimetres
E	1.75 +/- 0.10
F	3.5 +/- 0.05
P	4.0 +/- 0.10
P0	4.0 +/- 0.10
P2	2.0 +/- 0.05
W	8.00 +0.30/- 0.10
A0	2.19 +/- 0.05
B0	2.77 +/- 0.05
K0	1.05 +/- 0.05
T	0.25 +/- 0.02

Downloaded from Arrow.com.