



VLS201610HBX-3R3M-1



VLS201610HBX-3R3M-1

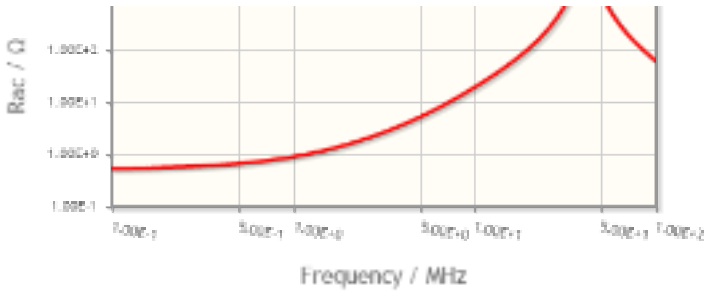


Inductance

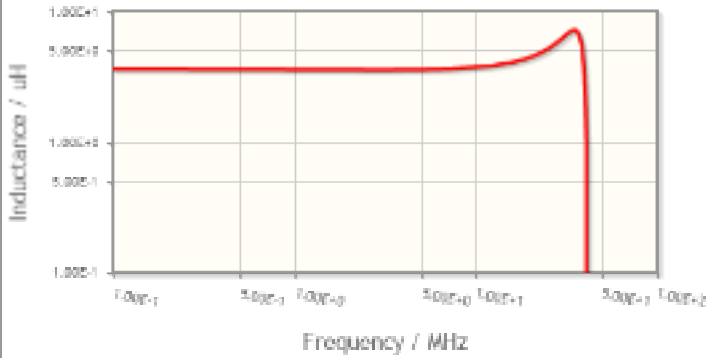

VLS201610HBX-3R3M-1




Q

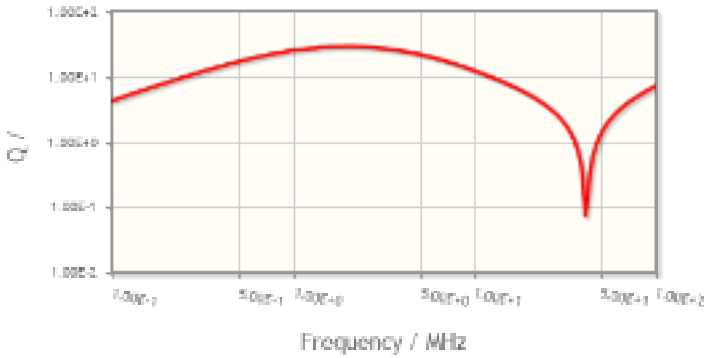

VLS201610HBX-3R3M-1




DC Bias Characteristic

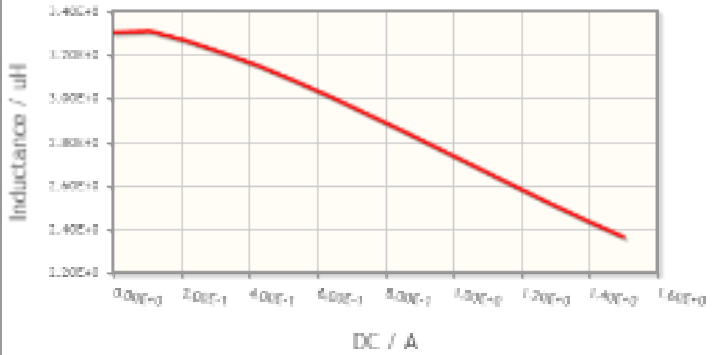

VLS201610HBX-3R3M-1(Amb. Temp. = 20degC)



Temperature Characteristic

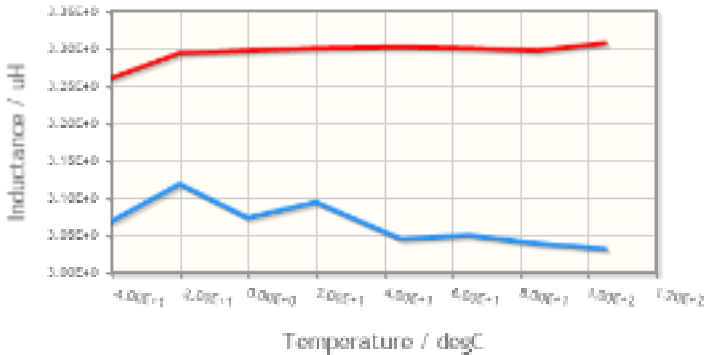


VLS201610HBX-3R3M-1(DC = 0A)

VLS201610HBX-3R3M-1(DC = 0.51A)



Temperature Rise by DC

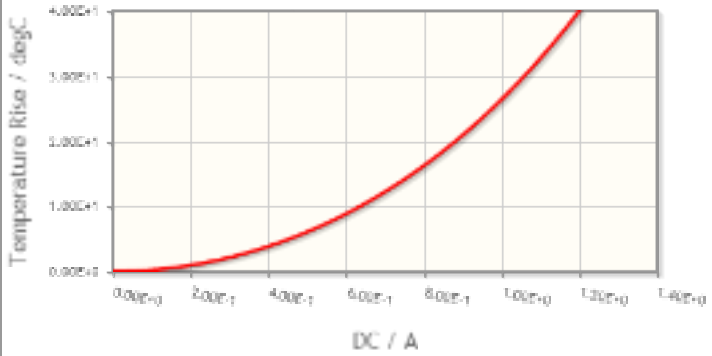

VLS201610HBX-3R3M-1(Amb. Temp. = 20degC)



Products

- » Search by Part No. » Search by Characteristics » Distributor Inventory Check
- » Capacitors

» Inductors (Coils)

» EMC Components

» RF / SAW Components and Modules

» Voltage Protection Devices

» Current Protection Devices

» Temperature Protection Devices

» Sensors and Sensor Systems

» Ceramic Switching / Heating, Piezo Components and Buzzers

» Transformers

» Ferrites and Accessories
- » Noise Suppression Sheets / Magnetic Sheets

» Anechoic Chambers and Radio Wave Absorbers

» Power Supplies

» Magnets

» Flash Storage

» Wireless Charging

» FA Systems

» ITO Transparent Conductive Film

» Micro Modules (Substrates with Built-in ICs, Products Utilizing with SESUB)

Application Guides

Technical Support

Tech Library

Environment

Contact

News

Home

-  About TDK
-  TDK Worldwide

Terms of Use

Copyright(c) 1996-2015 TDK Corporation. All rights reserved.
TDK logo is a trademark or registered trademark of TDK Corporation.