


PIN STYLE	No. OF POS.	DIM J	DIM K
35	1x02	2.54	4.93
34	1x03	5.08	7.47
33	1x04	7.62	10.01
32	1x05	10.16	12.55
31	1x06	12.70	15.09
30	1x07	15.24	17.63
29	1x08	17.78	20.17
28	1x09	20.32	22.71
27	1x10	22.86	25.25
26	1x11	25.40	27.79
25	1x12	27.94	30.33
24	1x13	30.48	32.87
23	1x14	33.02	35.41
22	1x15	35.56	37.95
21	1x16	38.10	40.49
20	1x17	40.64	43.03
19	1x18	43.18	45.57
18	1x19	45.72	48.11
17	1x20	48.26	50.65
16	1x21	50.80	53.19
15	1x22	53.34	55.73
14	1x23	55.88	58.27
13	1x24	58.42	60.81
12	1x25	60.96	63.35
11	1x26	63.50	65.89
10	1x27	66.04	68.43
09	1x28	68.58	70.97
08	1x29	71.12	73.51
07	1x30	73.66	76.05
06	1x31	76.20	78.59
05	1x32	78.74	81.13
04	1x33	81.28	83.67
03	1x34	83.82	86.21
02	1x35	86.36	88.75
01	1x36	88.90	91.29

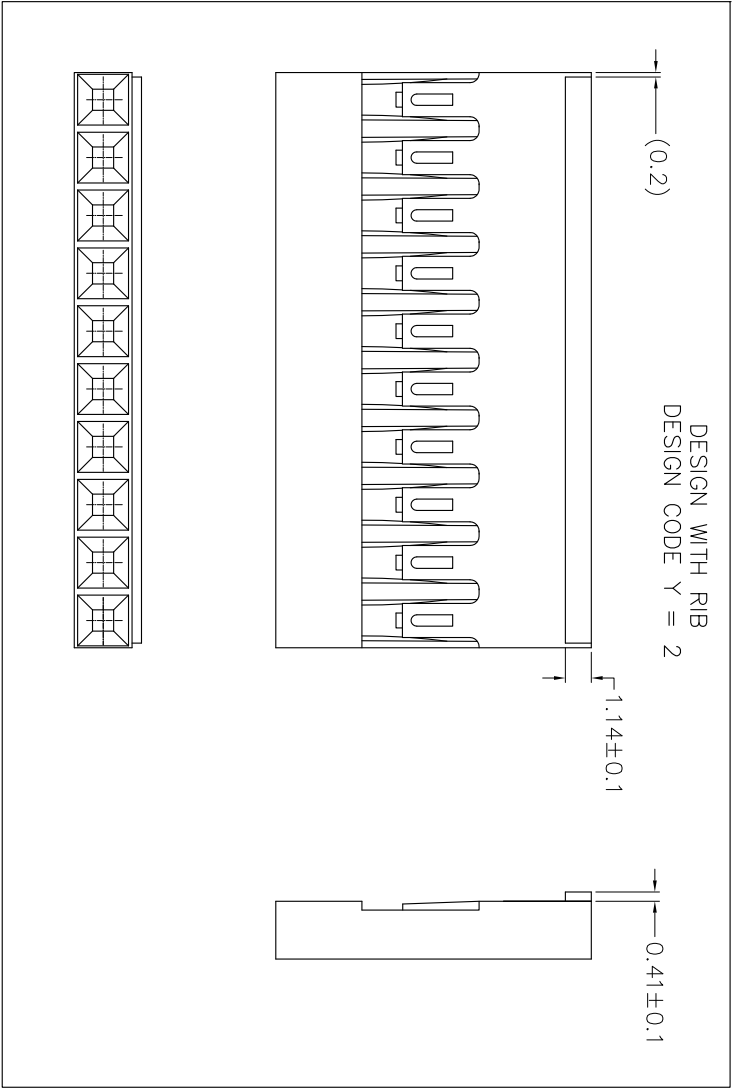

mat'l code				surface		tolerance		projection		product family	
ltr		ecn no	dr	date	ISO 1902	ISO 406	ISO 1011			BERCONN	
BE Y07-0483-HTB 07.07.24					tolerances unless otherwise specified				title MINI LATCH SR POLARIZED HSG 2.54mm		
BF F12-0064 LMU 12.06.08		angles		linear	.x ±0.3 .xx ±0.13 xxx ±0.05	mm ↔					
						scale 5:1					
		dr		L.MULIN 12.06.08						dwg no	
		engr		L.MULIN 12.06.08						sheet 2 of	
		chr								size	
		appd		JCO 12.06.08						A3	
sheet		revision								type	
index		sheet								CUSTOMER Drawing	