

Ordering Information

Part Number	Ambient Temperature Range	Package	Environmental
AOZ8221NI-05L	-40°C to +85°C	SOD523	RoHS Compliant Green Product



All AOS products are offered in packages with Pb-free plating and compliant to RoHS standards. Parts marked as Green Products (with "L" suffix) use reduced levels of Halogens, and are also RoHS compliant. Please visit www.aosmd.com/web/quality/rohs_compliant.jsp for additional information.

Absolute Maximum Ratings

Exceeding the Absolute Maximum ratings may damage the device.

Parameter	Rating
VP – VN	5V
Peak Pulse Current (I_{PP}), $t_P = 8/20\mu s$	5A
Storage Temperature (T_S)	-65°C to +150°C
ESD Rating per IEC61000-4-2, Contact ⁽¹⁾	±24kV
ESD Rating per IEC61000-4-2, Air ⁽¹⁾	±24kV
ESD Rating per Human Body Model ⁽²⁾	±30kV

Notes:

- IEC 61000-4-2 discharge with $C_{Discharge} = 150pF$, $R_{Discharge} = 330\Omega$.
- Human Body Discharge per MIL-STD-883, Method 3015 $C_{Discharge} = 100pF$, $R_{Discharge} = 1.5k\Omega$.

Maximum Operating Ratings

Parameter	Rating
Junction Temperature (T_J)	-40°C to +85°C

Electrical Characteristics

$T_A = 25^\circ C$ unless otherwise specified.




Symbol	Parameter	Symbol	Parameter
I_{PP}	Maximum Reverse Peak Pulse Current	I_T	Test Current
V_{CL}	Clamping Voltage @ I_{PP}	I_F	Forward Current
V_{RWM}	Working Peak Reverse Voltage	V_F	Forward Voltage @ I_F
I_R	Maximum Reverse Leakage Current @ V_{RWM}	P_{pk}	Peak Power Dissipation
V_{BR}	Breakdown Voltage @ I_T	C_J	Max. Capacitance @ $V_R = 0$ and $f = 1MHz$

Electrical Characteristics


$T_A = 25^\circ C$ unless otherwise noted, $V_F = 0.9V$ Max. @ $I_F = 10mA$ for all types

Device	Device Marking	V_{RWM} (V) Max.	V_{BR} (V) Max.	I_R (μA) Max.	V_F (V) Typ.	V_{CL} Max.			C_J (pF) Typ.
						$I_{PP} = 1A$	$I_{PP} = 5A$	$I_{PP} = 12A$	
AOZ8221NI-05L	H	5.0	6.0	0.1	1.0	11.00	13.00	16.00	13


Typical Performance Characteristics

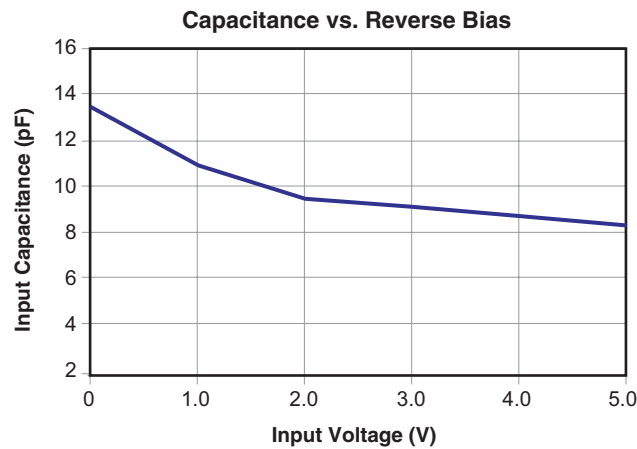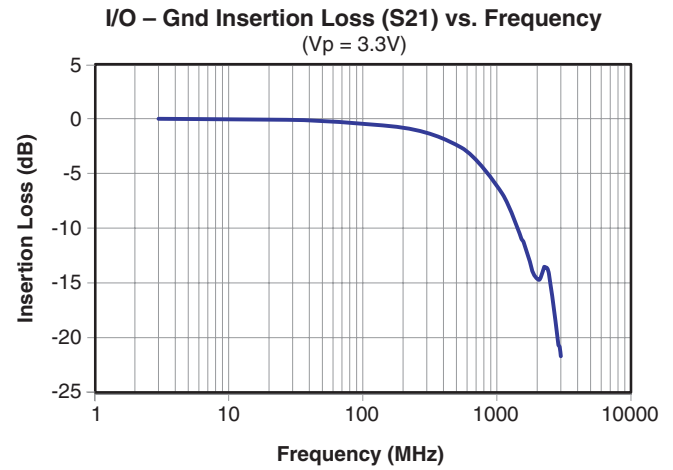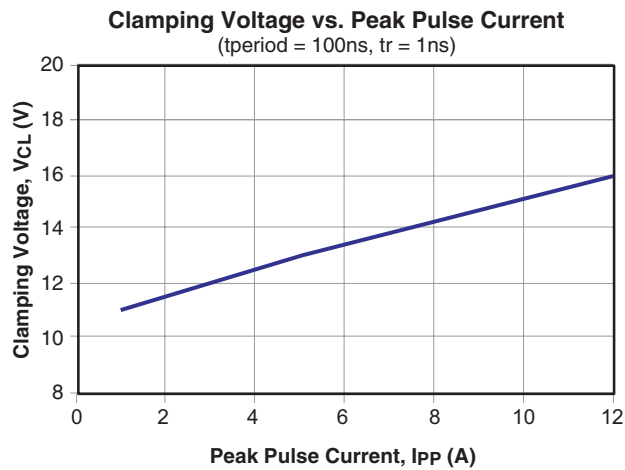


Package Dimensions, SOD523

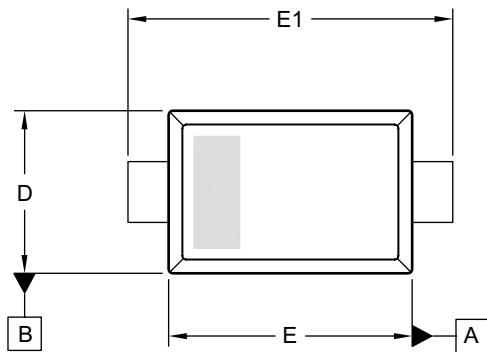


TOP VIEW

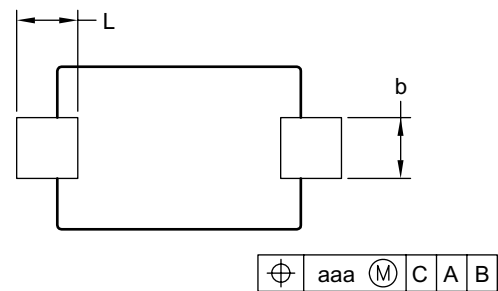

BOTTOM VIEW

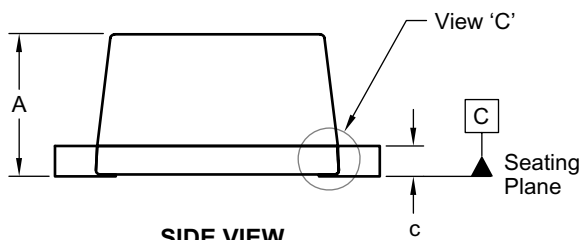


SIDE VIEW



VIEW 'C'

RECOMMENDED LAND PATTERN

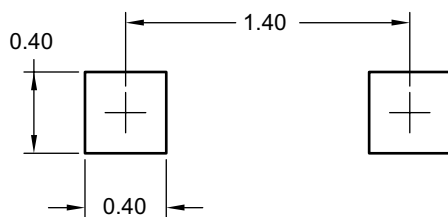

UNIT: mm

Dimensions in millimeters

Symbols	Min.	Nom.	Max.
A	0.50	0.60	0.70
A1	0.00	—	0.05
b	0.25	0.30	0.35
c	0.07	—	0.20
D	0.70	0.80	0.90
E	1.10	1.20	1.30
E1	1.50	1.60	1.70
L	0.25	0.30	0.40
aaa	0.08		

Dimensions in inches


Symbols	Min.	Nom.	Max.
A	0.020	0.024	0.028
A1	0.00	—	0.002
b	0.010	0.012	0.014
c	0.003	—	0.008
D	0.028	0.031	0.035
E	0.043	0.047	0.051
E1	0.059	0.063	0.067
L	0.010	0.012	0.016
aaa	0.003		

Notes:


1. All Dimensions are in millimeters.
2. Dimensions are inclusive of plating.
3. Controlling dimension is millimeter, converted inch dimensions are not necessarily exact.
4. The cathode mark is optional.
5. Package body sizes exclude mold flash and gate burrs. Mold flash at the non-lead sides should be less than 3 mils each.

Tape and Reel Dimensions, SOD523


Tape

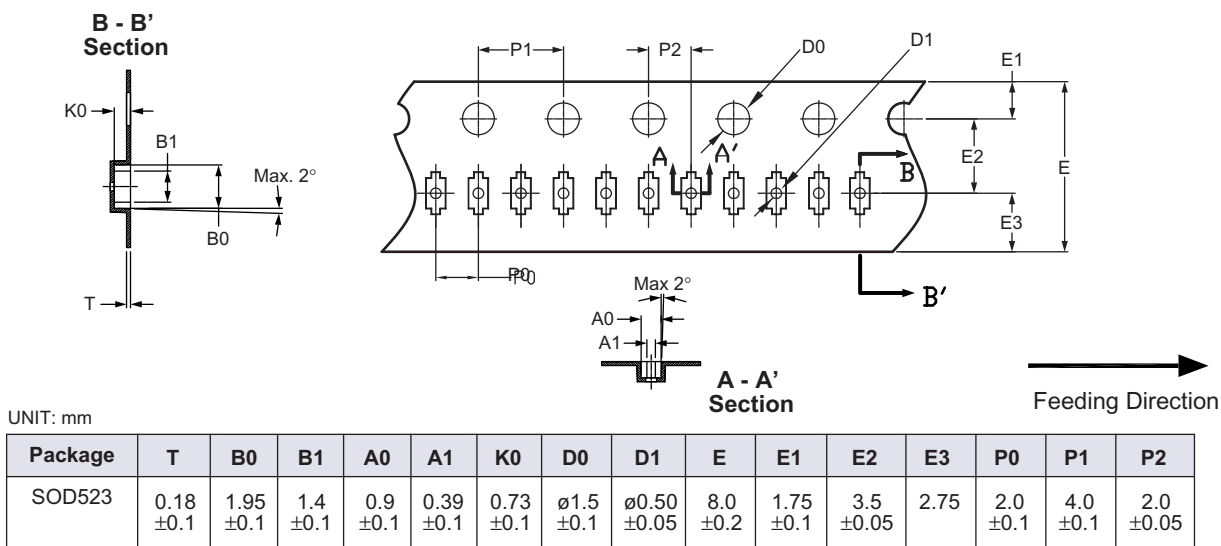


Reel

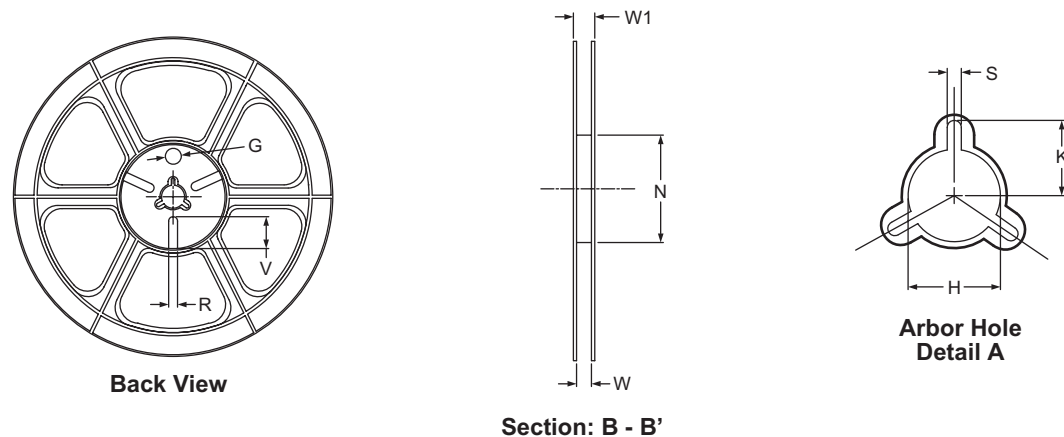

Leader/Trailer and Orientation

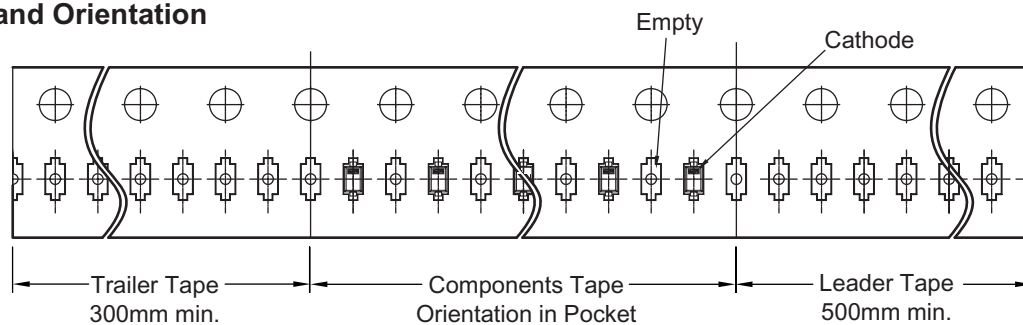

Part Marking

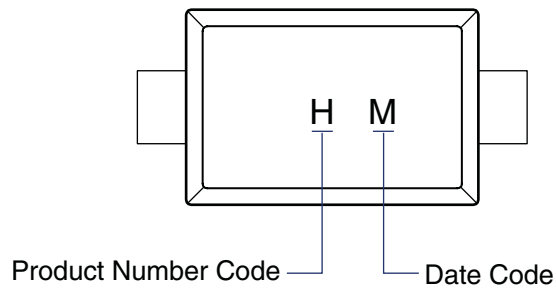

This datasheet contains preliminary data; supplementary data may be published at a later date. Alpha & Omega Semiconductor reserves the right to make changes at any time without notice.

LIFE SUPPORT POLICY

ALPHA & OMEGA SEMICONDUCTOR PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS.

As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support, device, or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.