

**TYPES**

Contact arrangement	Nominal coil voltage	Part No.
1 Form A (without Au-plated)	4.5V DC	APE1004H
	5V DC	APE10005
	6V DC	APE10006
	12V DC	APE10012
	18V DC	APE10018
	24V DC	APE10024
	48V DC	APE10048
1 Form A (with Au-plated)	60V DC	APE10060
	4.5V DC	APE1014H
	5V DC	APE10105
	6V DC	APE10106
	12V DC	APE10112
	18V DC	APE10118
	24V DC	APE10124
1 Form C (without Au-plated)	48V DC	APE10148
	60V DC	APE10160
	4.5V DC	APE3004H
	5V DC	APE30005
	6V DC	APE30006
	12V DC	APE30012
	18V DC	APE30018
1 Form C (with Au-plated)	24V DC	APE30024
	48V DC	APE30048
	60V DC	APE30060
	4.5V DC	APE3014H
	5V DC	APE30105
	6V DC	APE30106
	12V DC	APE30112
1 Form C (with Au-plated)	18V DC	APE30118
	24V DC	APE30124
	48V DC	APE30148
	60V DC	APE30160

Standard packing: Carton: 20 pcs.; Case: 1,000 pcs.

RATING**1. Coil data**

Nominal coil voltage	Pick-up voltage (at 20°C 68°F)	Drop-out voltage (at 20°C 68°F)	Nominal operating current [±10%] (at 20°C 68°F)	Coil resistance [±10%] (at 20°C 68°F)	Nominal operating power	Max. allowable voltage (at 20°C 68°F)
4.5V DC	66%V or less of nominal voltage (Initial)	5%V or more of nominal voltage (Initial)	38mA	119Ω	170mW	120%V of nominal voltage
5V DC			34mA	148Ω		
6V DC			28mA	212Ω		
12V DC			14mA	847Ω		
18V DC			9mA	1,906Ω		
24V DC			7mA	3,388Ω		
48V DC			5mA	10,618Ω	217mW	
60V DC			3mA	20,572Ω	175mW	

2. Specifications

Characteristics	Item		Specifications	
Contact	Arrangement		1 Form A, 1 Form C	
	Initial contact resistance, max.		Max. 100 mΩ (By voltage drop 6 V DC 1A)	Max. 30 mΩ (By voltage drop 6 V DC 1A)
	Contact material		AgSnO ₂ type	Au-plated AgSnO ₂ type
Rating	Nominal switching capacity (resistive load)		6 A 250 V AC	
	Max. switching power (resistive load)		1,500 VA	
	Max. switching voltage		250V AC	
	Max. switching current		6 A (AC)	
	Nominal operating power		170 mW (5 to 24 V DC), 217 mW (48 V DC), 175mW (60 V DC)	
	Min. switching capacity (Reference value)*1		100 mA 5 V DC (without Au-plated), 1 mA 1 V DC (with Au-plated)	
Electrical characteristics	Insulation resistance (Initial)		Min. 1,000MΩ (at 500V DC) Measurement at same location as "Initial breakdown voltage" section.	
	Breakdown voltage (Initial)	Between open contacts	1,000 Vrms for 1 min. (Detection current: 10 mA)	
		Between contact and coil	4,000 Vrms for 1 min. (Detection current: 10 mA)	
	Surge breakdown voltage*2	Between contact and coil	6,000 V (initial)	
	Temperature rise (at 20°C 68°F)		Max. 30°C (By resistive method, nominal voltage applied to the coil; contact carrying current: 6A.)	
	Operate time (at 20°C 68°F)		Max. 8 ms (approx. 5 ms) (Nominal voltage applied to the coil, excluding contact bounce time.)	
	Release time (at 20°C 68°F)		Max. 4 ms (approx. 2.5 ms) (Nominal voltage applied to the coil, excluding contact bounce time.) (without diode)	
Mechanical characteristics	Shock resistance	Functional	1 Form C: Min. 49 m/s ² ; 1 Form A: Min. 98 m/s ² (Half-wave pulse of sine wave: 11 ms; detection time: 10μs.)	
		Destructive	Min. 980 m/s ² (Half-wave pulse of sine wave: 6 ms.)	
	Vibration resistance	Functional	10 to 55 Hz at double amplitude of 1 mm (Detection time: 10μs.)	
		Destructive	10 to 55 Hz at double amplitude of 1.5 mm	
Expected life	Mechanical		Min. 5×10 ⁶ (at 180 cpm)	
	Electrical		N.O.: Min. 5×10 ⁴ , N.C.: Min. 3×10 ⁴ (at 6 cpm) (at rated load)	
Conditions	Conditions for operation, transport and storage*3		Ambient temperature: -40°C to +85°C -40°F to +185°F; Humidity: 5 to 85% R.H. (Not freezing and condensing at low temperature)	
	Max. operating speed (at rated load)		6 cpm	
Unit weight			Approx. 4 g .14 oz	

Notes:


*1 This value can change due to the switching frequency, environmental conditions, and desired reliability level, therefore it is recommended to check this with the actual load

*2 Wave is standard shock voltage of ±1.2×50μs according to JEC-212-1981

*3 Refer to "6. Usage, Storage and Transport Conditions" in [AMBIENT ENVIRONMENT](#) section in [Relay Technical Information](#).


REFERENCE DATA

1. Max. switching capacity

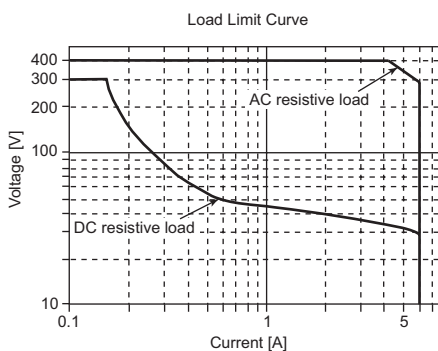


2. Coil temperature rise

Tested sample: APE30012
Measured portion: Inside the coil
Ambient temperature: 28°C 82°F

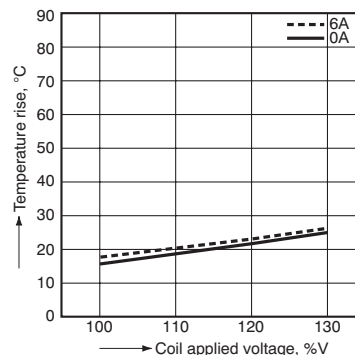


3. Ambient temperature characteristics

Tested sample: APE30012, 6 pcs.

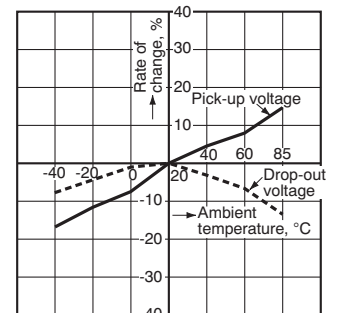


DIMENSIONS (Unit: mm inch)


1. 1 Form A type

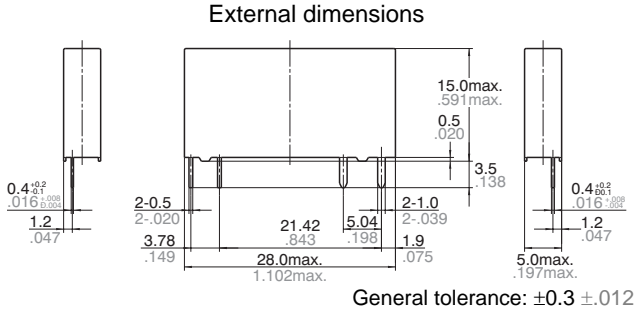


PC board pattern (Bottom view)

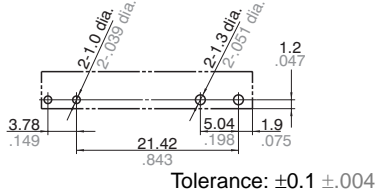


Schematic (Bottom view)




2. 1 Form C type

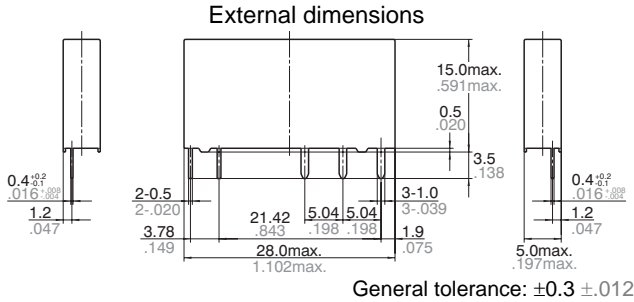

PC board pattern (Bottom view)

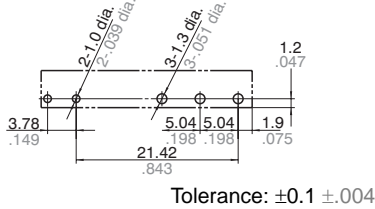


Schematic (Bottom view)




PE RELAY SOCKET


1. Dimensions

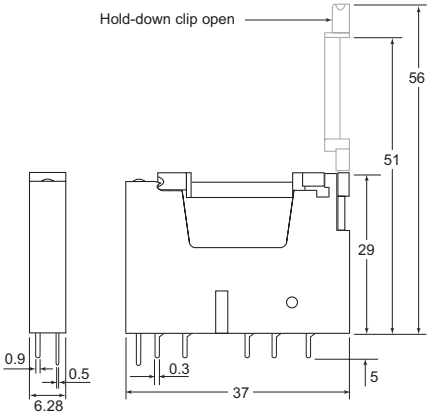

2. Pin Layout

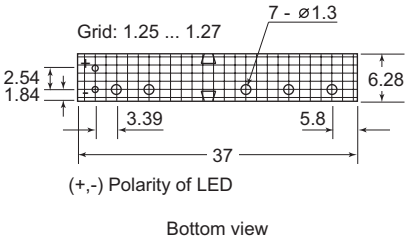

3. Handling

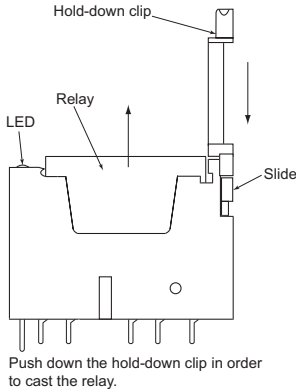

PE1-PS-GD

Specifications

LED		Pins rating
nominal voltage	24 V DC	see above
nominal current	appr. 4.2 mA	
diameter	3 mm	
color	green*	

*other LED-colors on request

Socket incorporates LED-indication, hold-down clip and an integrated casting mechanism; PCB-mounting.

NOTES

1. Cleaning

For automatic cleaning, the boiling method is recommended. Avoid ultrasonic cleaning which subjects the relays to high frequency vibrations, which may cause the contacts to stick.

It is recommended that a fluorinated hydrocarbon or other alcoholic solvents be used.

2. Soldering

The automatic soldering shall be performed under following condition.

1) Preheating

Temperature: Max. 120°C 248°F

Time: Max. 120s

2) Soldering

Temperature: 260°C±5°C 500°F±41°F

Time: Max. 6s

3. Coil operating power

Pure DC current should be applied to the coil. The wave form should be rectangular. If it includes ripple, the ripple factor should be less than 5%.

However, check it with the actual circuit since the characteristics may be slightly different.

4. Relay mounting

If, after mounting on PC boards, the relays are to be subjected to vibration during operation, use other means besides soldering to secure the relays to the PC board.

For Cautions for Use, see [Relay Technical Information](#).