

## ■ Absolute Maximum Ratings ( $T_a = 25^\circ\text{C}$ )


Item	Symbol	Rating	Unit	Measurement Conditions
Input	LED forward current	$I_F$	50	mA
	LED forward current reduction rate	$\Delta I_F/\text{°C}$	-0.5	mA/°C
	LED reverse voltage	$V_R$	5	V
	Connection temperature	$T_j$	125	°C
Output	Load voltage (AC peak/DC)	$V_{OFF}$	40	V
	Continuous load current	$I_O$	120	mA
	ON current reduction rate	$\Delta I_O/\text{°C}$	-1.2	mA/°C
	Connection temperature	$T_j$	125	°C
Dielectric strength between input and output (See note 1.)	$V_{I-O}$	1,500	$V_{rms}$	AC for 1 min
Operating temperature	$T_a$	-20 to +85	°C	With no icing or condensation
Storage temperature	$T_{stg}$	-40 to +125	°C	With no icing or condensation
Soldering temperature (10 s)	---	260	°C	10 s

Note: 1. The dielectric strength between the input and output was checked by applying voltage between all pins as a group on the LED side and all pins as a group on the light-receiving side.

## ■ Electrical Characteristics ( $T_a = 25^\circ\text{C}$ )

Item	Symbol	Minimi-	Typical	Maxi-	Unit	Measurement conditions
Input	LED forward voltage	$V_F$	1.0	1.15	1.3	V $I_F = 10 \text{ mA}$
	Reverse current	$I_R$	---	---	10	$\mu\text{A}$ $V_R = 5 \text{ V}$
	Capacity between terminals	$C_T$	---	15	---	pF $V = 0, f = 1 \text{ MHz}$
	Trigger LED forward current	$I_{FT}$	---	---	4	mA $I_O = 100 \text{ mA}$
Output	Maximum resistance with output ON	$R_{ON}$	---	6.5	9.5	$\Omega$ $I_F = 5 \text{ mA}, I_O = 120 \text{ mA}, t = 10 \text{ ms}$
	Current leakage when the relay is open	$I_{LEAK}$	---	0.2	1.0	nA $V_{OFF} = 30 \text{ V}, T_a = 50^\circ\text{C}$
	Capacity between terminals	$C_{OFF}$	---	1.65	3.0	pF $V = 0, f = 100 \text{ MHz}, t < 1 \text{ s}$
Capacity between I/O terminals	$C_{I-O}$	---	0.8	---	pF	$f = 1 \text{ MHz}, V_s = 0 \text{ V}$
Insulation resistance between I/O terminals	$R_{I-O}$	1,000	---	---	MΩ	$V_{I-O} = 500 \text{ VDC}, R_{I-O} \leq 60\%$
Turn-ON time	$t_{ON}$	---	0.03	0.5	ms	$I_F = 10 \text{ mA}, R_L = 200 \Omega, V_{DD} = 10 \text{ V}$ (See note 2.)
Turn-OFF time	$t_{OFF}$	---	0.15	0.5	ms	

Note: 2. Turn-ON and Turn-OFF Times




## ■ Recommended Operating Conditions

Use the G3VM under the following conditions so that the Relay will operate properly.

Item	Symbol	Minimum	Typical	Maximum	Unit
Load voltage (AC peak/DC)	$V_{DD}$	---	---	32	V
Operating LED forward current	$I_F$	10	---	30	mA
Continuous load current (AC peak/DC)	$I_O$	---	---	120	mA
Operating temperature	$T_a$	25	---	60	°C

## ■ Engineering Data

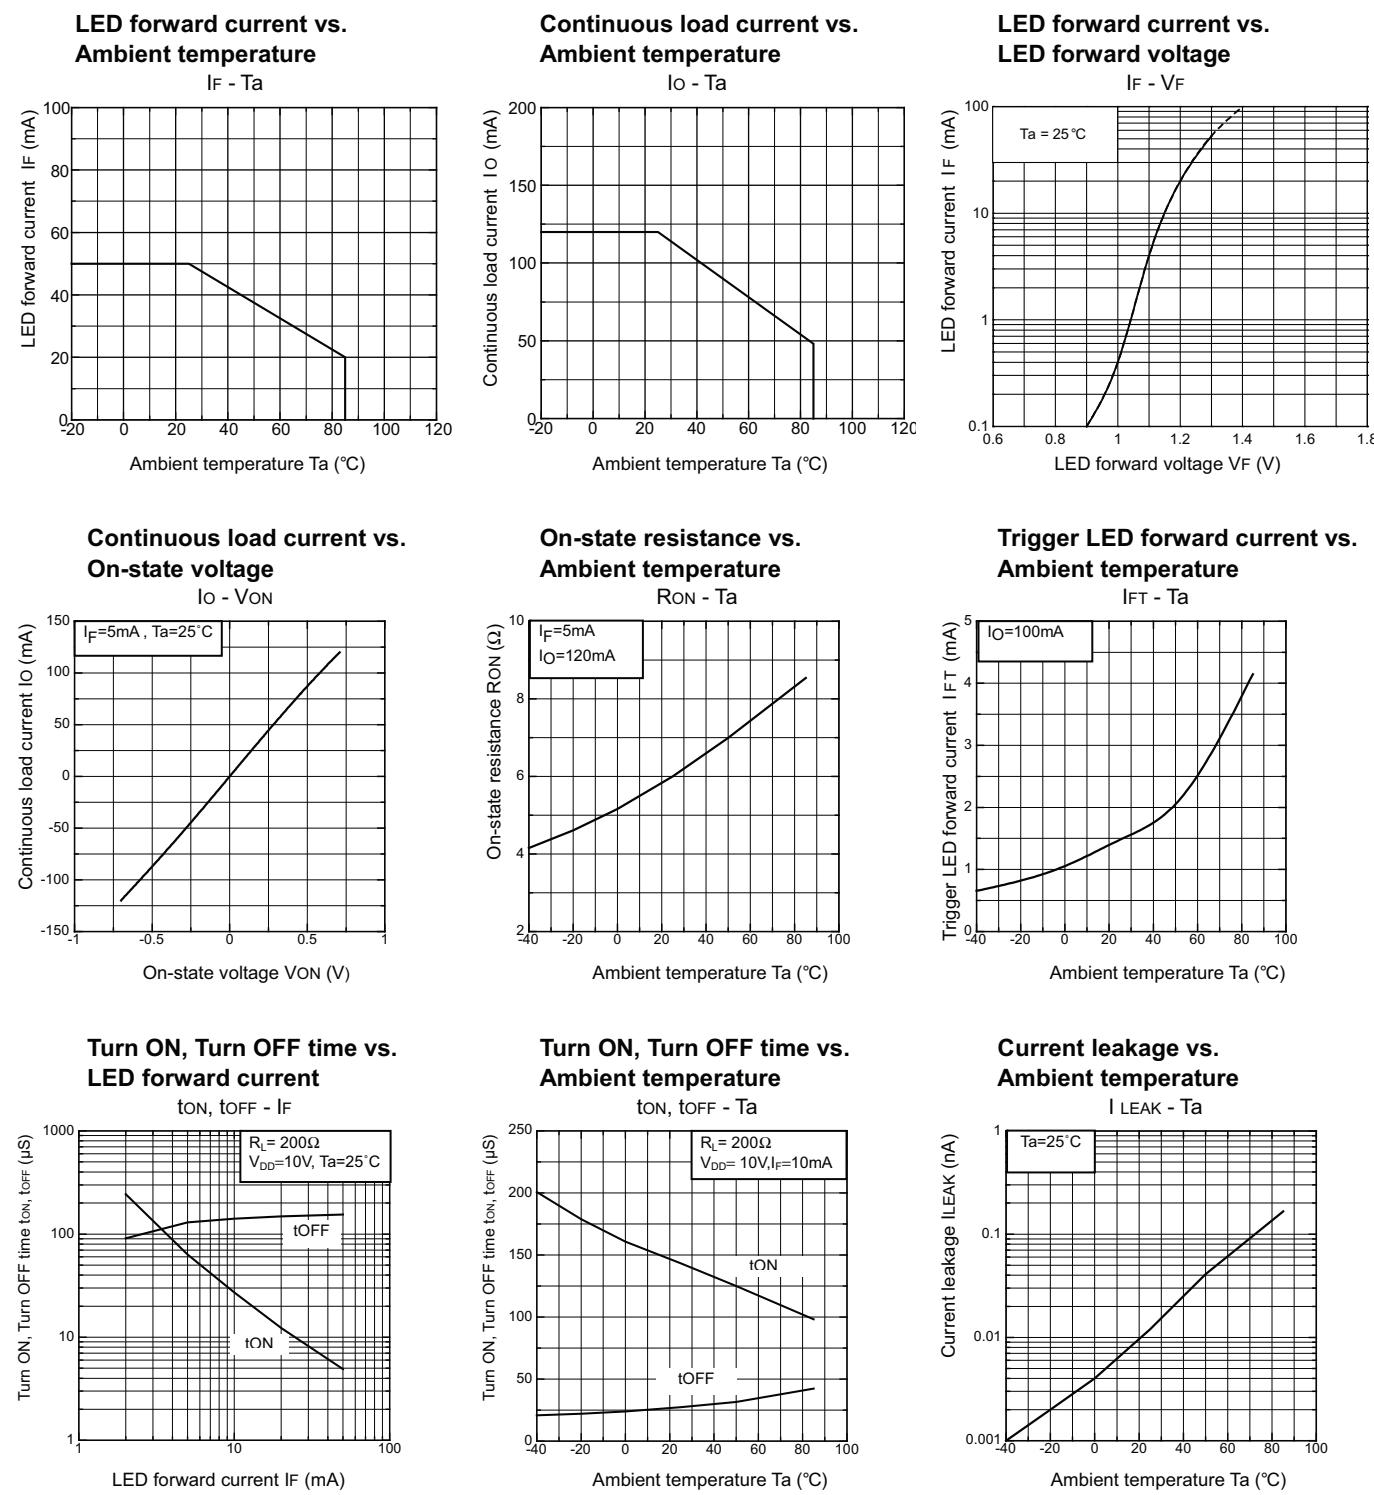

All sales are subject to Omron Electronic Components LLC standard terms and conditions of sale, which can be found at [http://www.components.omron.com/components/web/webfiles.nsf/sales\\_terms.html](http://www.components.omron.com/components/web/webfiles.nsf/sales_terms.html)

**ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.**

To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.



**OMRON ELECTRONIC  
COMPONENTS LLC**  
55 E. Commerce Drive, Suite B  
Schaumburg, IL 60173

**847-882-2288**

Cat. No. X302-E-1

12/10

Specifications subject to change without notice

**OMRON ON-LINE**

Global - <http://www.omron.com>  
USA - <http://www.components.omron.com>

Printed in USA

---

MOS FET Relays **G3VM-41GR7**