

| Symbol       | Test Conditions                                                                                 | Characteristic Values<br>( $T_J = 25^\circ\text{C}$ unless otherwise specified) |      |                    |
|--------------|-------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------|------|--------------------|
|              |                                                                                                 | Min.                                                                            | Typ. | Max.               |
| $g_{fs}$     | $V_{DS} = 20\text{ V}; I_D = 10\text{ A}$ , pulse test                                          | 14                                                                              | 23   | S                  |
| $C_{iss}$    | $V_{GS} = 0\text{ V}, V_{DS} = 25\text{ V}, f = 1\text{ MHz}$                                   |                                                                                 | 4685 | pF                 |
| $C_{oss}$    |                                                                                                 |                                                                                 | 356  | pF                 |
| $C_{rss}$    |                                                                                                 |                                                                                 | 26   | pF                 |
| $t_{d(on)}$  | $V_{GS} = 10\text{ V}, V_{DS} = 0.5 V_{DSS}, I_D = 10\text{ A}$<br>$R_G = 2\ \Omega$ (External) |                                                                                 | 30   | ns                 |
| $t_r$        |                                                                                                 |                                                                                 | 24   | ns                 |
| $t_{d(off)}$ |                                                                                                 |                                                                                 | 85   | ns                 |
| $t_f$        |                                                                                                 |                                                                                 | 24   | ns                 |
| $Q_{g(on)}$  | $V_{GS} = 10\text{ V}, V_{DS} = 0.5 V_{DSS}, I_D = 10\text{ A}$                                 |                                                                                 | 86   | nC                 |
| $Q_{gs}$     |                                                                                                 |                                                                                 | 27   | nC                 |
| $Q_{gd}$     |                                                                                                 |                                                                                 | 24   | nC                 |
| $R_{thJC}$   | (TO-247, PLUS220)                                                                               |                                                                                 | 0.25 | $^\circ\text{C/W}$ |
| $R_{thCS}$   |                                                                                                 |                                                                                 | 0.21 | $^\circ\text{C/W}$ |


| Symbol   | Test Conditions                                                                                       | Characteristic Values<br>( $T_J = 25^\circ\text{C}$ unless otherwise specified) |      |               |
|----------|-------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------|------|---------------|
|          |                                                                                                       | Min.                                                                            | Typ. | Max.          |
| $I_S$    | $V_{GS} = 0\text{ V}$                                                                                 |                                                                                 |      | 20 A          |
| $I_{SM}$ | Repetitive                                                                                            |                                                                                 |      | 50 A          |
| $V_{SD}$ | $I_F = I_S, V_{GS} = 0\text{ V}$ ,<br>Pulse test, $t \leq 300\ \mu\text{s}$ , duty cycle $d \leq 2\%$ |                                                                                 |      | 1.5 V         |
| $t_{rr}$ | $I_F = 25\text{ A}, -di/dt = 100\text{ A}/\mu\text{s}$<br>$V_R = 100\text{ V}; V_{GS} = 0\text{ V}$   |                                                                                 |      | 250 ns        |
| $Q_{RM}$ |                                                                                                       |                                                                                 | 0.8  | $\mu\text{C}$ |
| $I_{RM}$ |                                                                                                       |                                                                                 | 6.0  | A             |

IXYS reserves the right to change limits, test conditions, and dimensions.


IXYS MOSFETs and IGBTs are covered by one or more of the following U.S. patents:

|           |           |           |           |              |              |              |              |
|-----------|-----------|-----------|-----------|--------------|--------------|--------------|--------------|
| 4,835,592 | 4,931,844 | 5,049,961 | 5,237,481 | 6,162,665    | 6,404,065 B1 | 6,683,344    | 6,727,585    |
| 4,850,072 | 5,017,508 | 5,063,307 | 5,381,025 | 6,259,123 B1 | 6,534,343    | 6,710,405 B2 | 6,759,692    |
| 4,881,106 | 5,034,796 | 5,187,117 | 5,486,715 | 6,306,728 B1 | 6,583,505    | 6,710,463    | 6,771,478 B2 |


**Fig. 1. Output Characteristics**  
**@ 25°C**

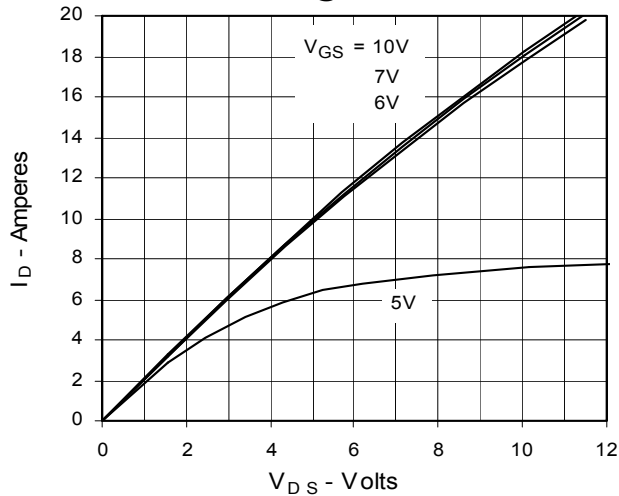


**Fig. 2. Extended Output Characteristics**  
**@ 25°C**

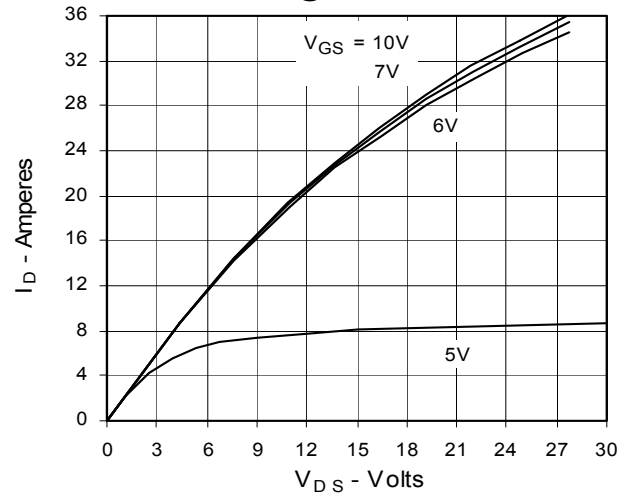


**Fig. 3. Output Characteristics**  
**@ 125°C**

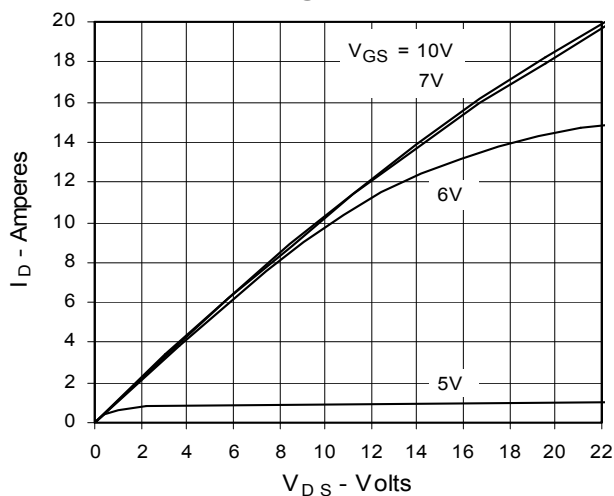

**Fig. 4.  $R_{DS(on)}$  Normalized to  $I_D = 10A$**   
**Value vs. Junction Temperature**

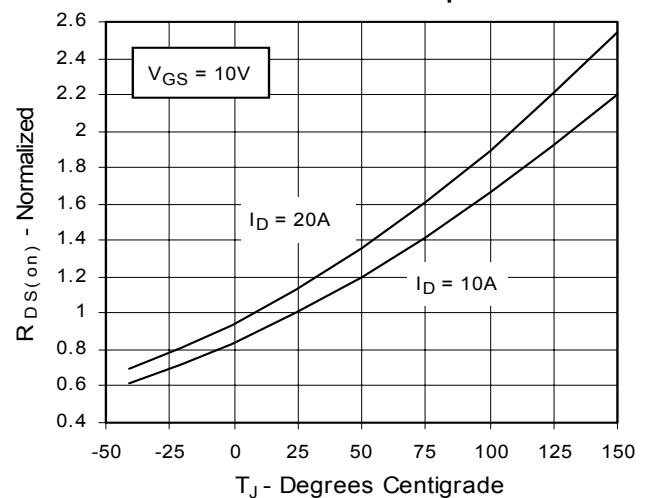

**Fig. 5.  $R_{DS(on)}$  Normalized to**  
 **$I_D = 10A$  Value vs. Drain Current**

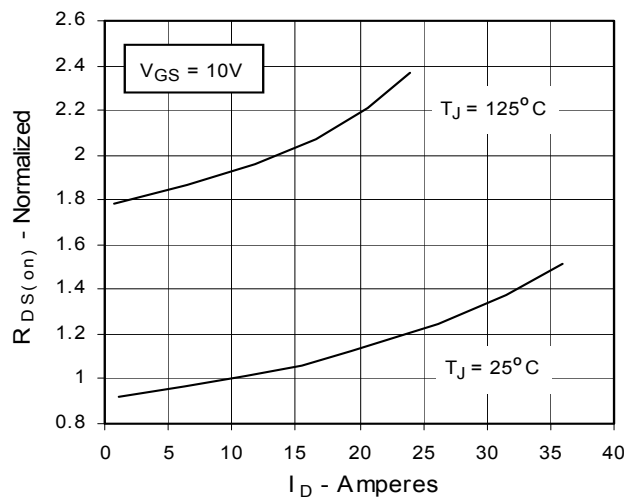

**Fig. 6. Drain Current vs. Case**  
**Temperature**

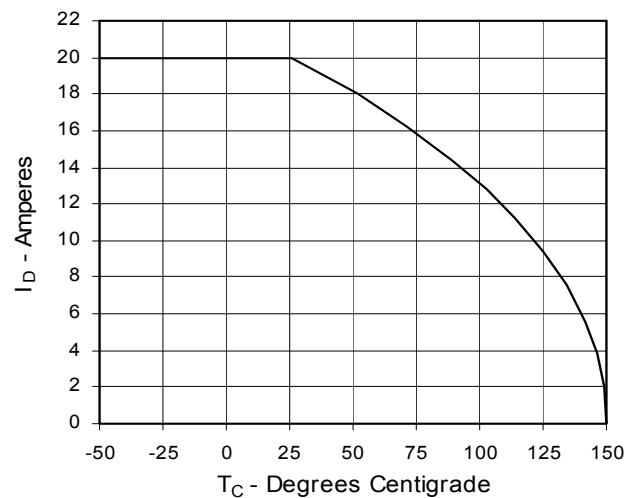


Fig. 7. Input Admittance

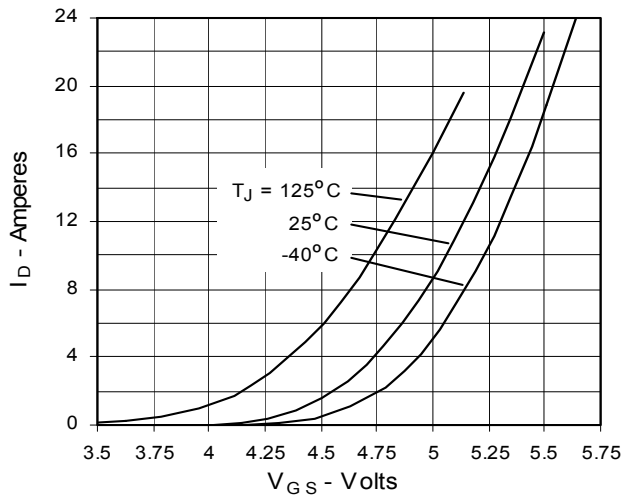


Fig. 8. Transconductance

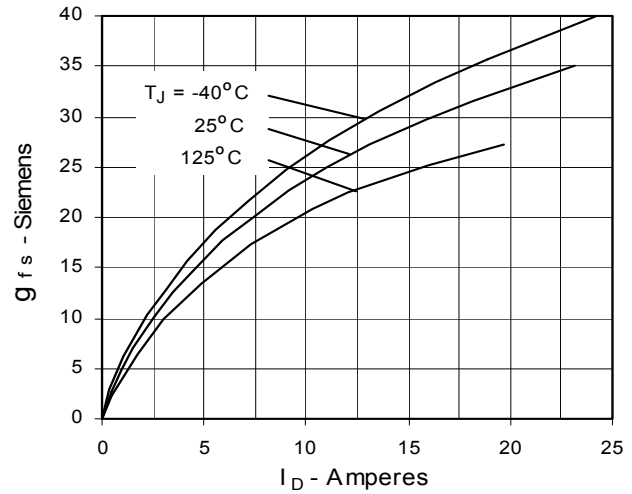


Fig. 9. Source Current vs. Source-To-Drain Voltage

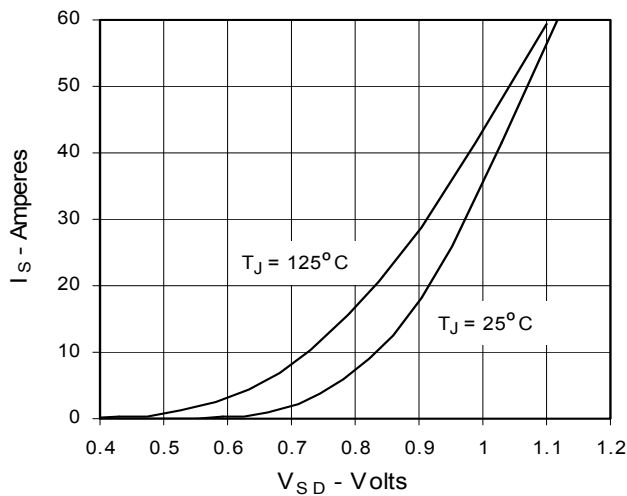


Fig. 10. Gate Charge

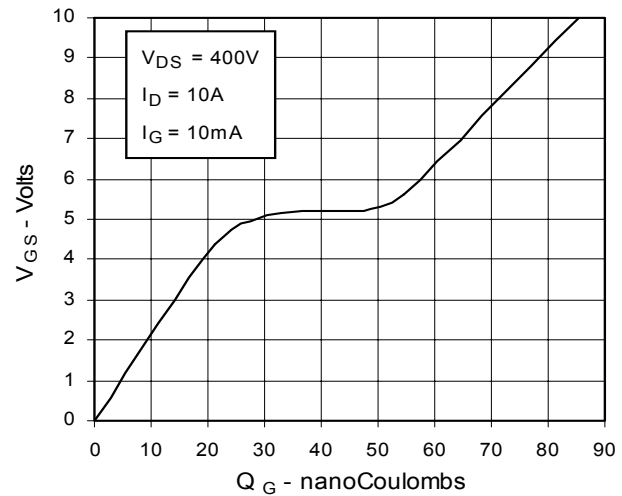


Fig. 11. Capacitance



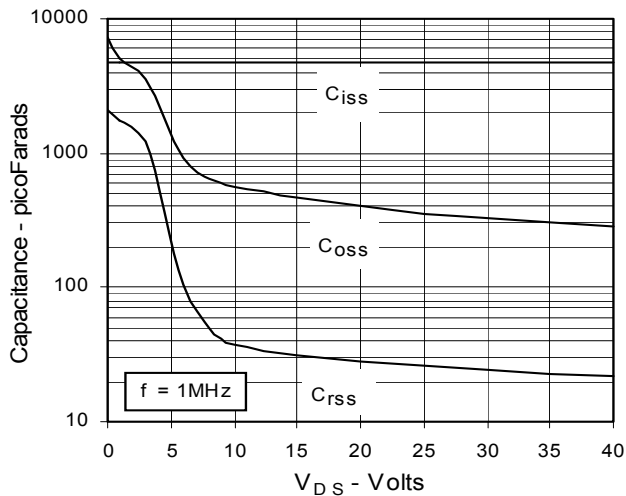


Fig. 12. Maximum Transient Thermal Resistance

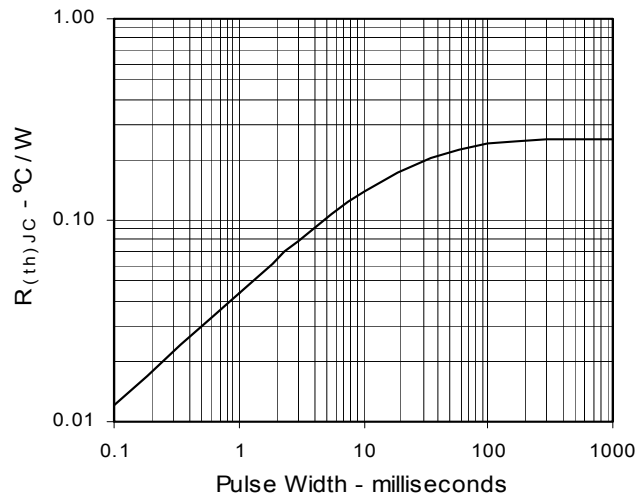


# Package Outline Drawings

## TO-247AD (IXFH) Outline




| Dim.           | Millimeter<br>Min. Max. | Inches<br>Min. Max. |
|----------------|-------------------------|---------------------|
| A              | 4.7 5.3                 | .185 .209           |
| A <sub>1</sub> | 2.2 2.54                | .087 .102           |
| A <sub>2</sub> | 2.2 2.6                 | .059 .098           |
| b              | 1.0 1.4                 | .040 .055           |
| b <sub>1</sub> | 1.65 2.13               | .065 .084           |
| b <sub>2</sub> | 2.87 3.12               | .113 .123           |
| C              | .4 .8                   | .016 .031           |
| D              | 20.80 21.46             | .819 .845           |
| E              | 15.75 16.26             | .610 .640           |
| e              | 5.20 5.72               | 0.205 0.225         |
| L              | 19.81 20.32             | .780 .800           |
| L1             | 4.50                    | .177                |
| ØP             | 3.55 3.65               | .140 .144           |
| Q              | 5.89 6.40               | 0.232 0.252         |
| R              | 4.32 5.49               | .170 .216           |
| S              | 6.15 BSC                | .242 BSC            |

## TO-268 (IXFT) Outline

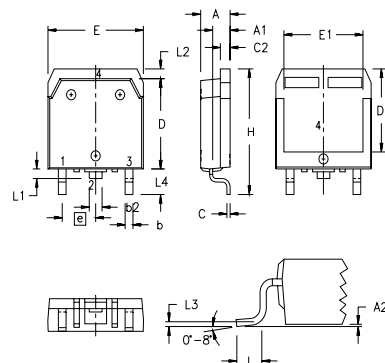

| SYM | INCHES   |      | MILLIMETERS |       |
|-----|----------|------|-------------|-------|
|     | MIN      | MAX  | MIN         | MAX   |
| A   | .193     | .201 | 4.90        | 5.10  |
| A1  | .106     | .114 | 2.70        | 2.90  |
| A2  | .001     | .010 | 0.02        | 0.25  |
| b   | .045     | .057 | 1.15        | 1.45  |
| b2  | .075     | .083 | 1.90        | 2.10  |
| C   | .016     | .026 | 0.40        | 0.65  |
| C2  | .057     | .063 | 1.45        | 1.60  |
| D   | .543     | .551 | 13.80       | 14.00 |
| D1  | .488     | .500 | 12.40       | 12.70 |
| E   | .624     | .632 | 15.85       | 16.05 |
| E1  | .524     | .535 | 13.30       | 13.60 |
| e   | .215 BSC |      | 5.45 BSC    |       |
| H   | .736     | .752 | 18.70       | 19.10 |
| L   | .094     | .106 | 2.40        | 2.70  |
| L1  | .047     | .055 | 1.20        | 1.40  |
| L2  | .039     | .045 | 1.00        | 1.15  |
| L3  | .010 BSC |      | 0.25 BSC    |       |
| L4  | .150     | .161 | 3.80        | 4.10  |


## PLUS220 (IXFV) Outline

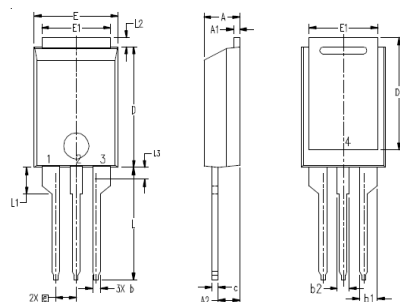

1. GATE
2. DRAIN (COLLECTOR)
3. SOURCE (EMITTER)
4. DRAIN (COLLECTOR)

| SYM | INCHES   |      | MILLIMETER |       |
|-----|----------|------|------------|-------|
|     | MIN      | MAX  | MIN        | MAX   |
| A   | .169     | .185 | 4.30       | 4.70  |
| A1  | .028     | .035 | 0.70       | 0.90  |
| A2  | .098     | .118 | 2.50       | 3.00  |
| b   | .035     | .047 | 0.90       | 1.20  |
| b1  | .080     | .095 | 2.03       | 2.41  |
| b2  | .054     | .064 | 1.37       | 1.63  |
| c   | .028     | .035 | 0.70       | 0.90  |
| D   | .551     | .591 | 14.00      | 15.00 |
| D1  | .512     | .539 | 13.00      | 13.70 |
| E   | .394     | .433 | 10.00      | 11.00 |
| E1  | .331     | .346 | 8.40       | 8.80  |
| e   | .100 BSC |      | 2.54 BSC   |       |
| L   | .512     | .551 | 13.00      | 14.00 |
| L1  | .118     | .138 | 3.00       | 3.50  |
| L2  | .035     | .051 | 0.90       | 1.30  |
| L3  | .047     | .059 | 1.20       | 1.50  |

## PLUS220SMD (IXFV\_S) Outline

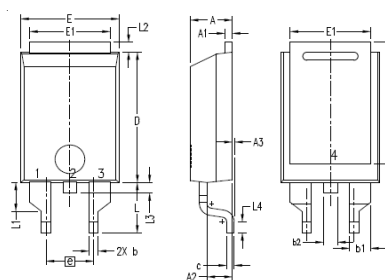

1. GATE
2. DRAIN (COLLECTOR)
3. SOURCE (EMITTER)
4. DRAIN (COLLECTOR)

| SYM | INCHES   |      | MILLIMETER |       |
|-----|----------|------|------------|-------|
|     | MIN      | MAX  | MIN        | MAX   |
| A   | .169     | .185 | 4.30       | 4.70  |
| A1  | .028     | .035 | 0.70       | 0.90  |
| A2  | .098     | .118 | 2.50       | 3.00  |
| A3  | .000     | .010 | 0.00       | 0.25  |
| b   | .035     | .047 | 0.90       | 1.20  |
| b1  | .080     | .095 | 2.03       | 2.41  |
| b2  | .054     | .064 | 1.37       | 1.63  |
| c   | .028     | .035 | 0.70       | 0.90  |
| D   | .551     | .591 | 14.00      | 15.00 |
| D1  | .512     | .539 | 13.00      | 13.70 |
| E   | .394     | .433 | 10.00      | 11.00 |
| E1  | .331     | .346 | 8.40       | 8.80  |
| e   | .200 BSC |      | 5.08 BSC   |       |
| L   | .209     | .228 | 5.30       | 5.80  |
| L1  | .118     | .138 | 3.00       | 3.50  |
| L2  | .035     | .051 | 0.90       | 1.30  |
| L3  | .047     | .059 | 1.20       | 1.50  |
| L4  | .039     | .059 | 1.00       | 1.50  |



---

Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at [www.littelfuse.com/disclaimer-electronics](http://www.littelfuse.com/disclaimer-electronics).