


BLOCK DIAGRAMS

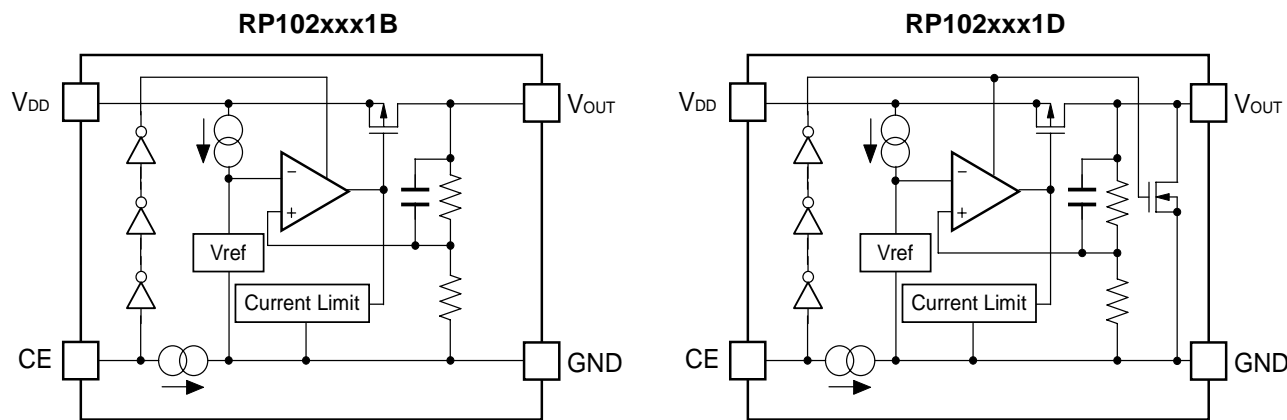


SELECTION GUIDE

The output voltage, auto discharge function, package, and the taping type, etc. for the ICs can be selected at the user's request.


Product Name	Package	Quantity per Reel	Pb Free	Halogen Free
RP102Zxx1*-TR-F	WLCSP-4-P2	5,000 pcs	Yes	Yes
RP102Kxx1*-TR	DFN(PLP)1820-6	5,000 pcs	Yes	Yes
RP102Nxx1*-TR-FE	SOT-23-5	3,000 pcs	Yes	Yes
xx: The output voltage can be designated in the range from 1.2V(12) to 3.3V(33) in 0.1V steps. (For other voltages, please refer to MARK INFORMATION.)				
* : CE pin polarity and auto discharge function at off state are options as follows. (B) "H" active, without auto discharge function at off state (D) "H" active, with auto discharge function at off state				

PIN CONFIGURATIONS


• WLCSP-4-P2

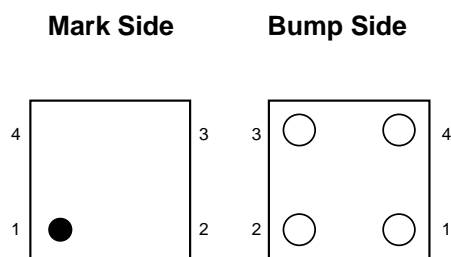

• DFN(PLP)1820-6

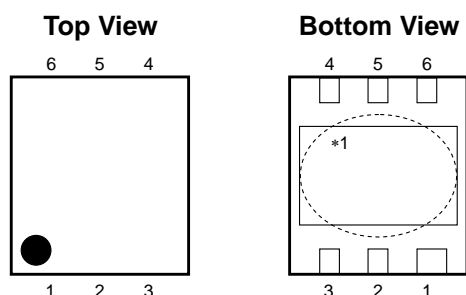

• SOT-23-5



PIN DESCRIPTION

• WLCSP-4-P2

Pin No	Symbol	Pin Description
1	V_{DD}	Input Pin
2	CE	Chip Enable Pin ("H" Active)
3	GND	Ground Pin
4	V_{OUT}	Output Pin

• DFN(PLP)1820-6

Pin No	Symbol	Pin Description
1	V_{OUT}	Output Pin *2
2	V_{OUT}	Output Pin *2
3	GND	Ground Pin
4	CE	Chip Enable Pin ("H" Active)
5	V_{DD}	Input Pin *2
6	V_{DD}	Input Pin *2

*1) Tab is GND level. (They are connected to the reverse side of this IC.)

The tab is better to be connected to the GND, but leaving it open is also acceptable.

*2) No.1 pin and No.2 pin, No.5 pin and No.6 pin of DFN(PLP)1820-6 package must be wired when it is mounted on board.

• SOT-23-5

Pin No	Symbol	Pin Description
1	V_{DD}	Input Pin
2	GND	Ground Pin
3	CE	Chip Enable Pin ("H" Active)
4	NC	No Connection
5	V_{OUT}	Output Pin

ABSOLUTE MAXIMUM RATINGS

Symbol	Item	Rating	Unit
V_{IN}	Input Voltage	6.0	V
V_{CE}	Input Voltage (CE Pin)	6.0	V
V_{OUT}	Output Voltage	-0.3 to $V_{IN}+0.3$	V
I_{OUT}	Output Current	400	mA
P_D	Power Dissipation (WLCSP-4-P2) *	530	mW
	Power Dissipation (SOT-23-5) *	420	
	Power Dissipation (DFN(PLP)1820-6) *	880	
T_{opt}	Operating Temperature Range	-40 to 85	°C
T_{stg}	Storage Temperature Range	-55 to 125	°C

*) For Power Dissipation, please refer to PACKAGE INFORMATION.

ABSOLUTE MAXIMUM RATINGS

Electronic and mechanical stress momentarily exceeded absolute maximum ratings may cause the permanent damages and may degrade the life time and safety for both device and system using the device in the field.

The functional operation at or over these absolute maximum ratings is not assured.

RECOMMENDED OPERATING CONDITIONS (ELECTRICAL CHARACTERISTICS)

All of electronic equipment should be designed that the mounted semiconductor devices operate within the recommended operating conditions. The semiconductor devices cannot operate normally over the recommended operating conditions, even if when they are used over such conditions by momentary electronic noise or surge.

And the semiconductor devices may receive serious damage when they continue to operate over the recommended operating conditions.

ELECTRICAL CHARACTERISTICS

● RP102xxx1B/D

V_{IN} =Set $V_{OUT}+1V$ for V_{OUT} options greater than 1.5V. $V_{IN}=2.5V$ for $V_{OUT} \leq 1.5V$.

$I_{OUT}=1mA$, $C_{IN}=C_{OUT}=1\mu F$, unless otherwise noted.

$T_{opt}=25^{\circ}C$

Symbol	Item	Conditions		Min.	Typ.	Max.	Unit
V _{OUT}	Output Voltage	V _{IN} =Set V _{OUT} +1V	V _{OUT} > 2.0V	×0.992		×1.008	V
			V _{OUT} ≤ 2.0V	−16		+16	mV
I _{OUT}	Output Current			300			mA
ΔV _{OUT} /ΔI _{OUT}	Load Regulation	1mA ≤ I _{OUT} ≤ 150mA			10	20	mV
		1mA ≤ I _{OUT} ≤ 300mA			20	40	
V _{DIF}	Dropout Voltage	Refer to the following table					
I _{SS}	Supply Current	I _{OUT} =0mA			50	70	μA
I _{standby}	Supply Current (Standby)	V _{CE} =0V			0.1	2.0	μA
ΔV _{OUT} /ΔV _{IN}	Line Regulation	Set V _{OUT} +0.5V ≤ V _{IN} ≤ 5V			0.02	0.10	%/V
RR	Ripple Rejection	f=1kHz, Ripple 0.2Vp-p V _{IN} =Set V _{OUT} +1V, I _{OUT} =30mA (In case that V _{OUT} ≤ 2V, V _{IN} =3V)			80		dB
V _{IN}	Input Voltage*			1.7		5.25	V
ΔV _{OUT} /ΔT _{opt}	Output Voltage Temperature Coefficient	−40°C ≤ T _{opt} ≤ 85°C			±20		ppm /°C
I _{SC}	Short Current Limit	V _{OUT} =0V			50		mA
I _{PD}	CE Pull-down Current			0.05	0.3	0.6	μA
V _{CEH}	CE Input Voltage “H”			1.1			V
V _{CEL}	CE Input Voltage “L”					0.3	V
en	Output Noise	BW=10Hz to 100kHz, I _{OUT} =30mA			30		μVrms
R _{LOW}	Low Output Nch Tr. ON Resistance (of D version)	V _{IN} =4V V _{CE} =0V			30		Ω


*) The maximum Input Voltage of the ELECTRICAL CHARACTERISTICS is 5.25V. In case of exceeding this specification, the IC must be operated on condition that the Input Voltage is up to 5.5V and the total operating time is within 500hrs.

● Electrical Characteristics by Output Voltage

$T_{opt}=25^{\circ}C$

Output Voltage V_{OUT} (V)	Dropout Voltage V_{DIF} (V)					
	Condition	Typ.	Max.	Condition	Typ.	Max.
$1.2V \leq V_{OUT} < 1.5V$	$I_{OUT}=150mA$	0.145	-	$I_{OUT}=300mA$	0.290	0.500
$1.5V \leq V_{OUT} < 1.7V$		0.110	0.160		0.220	0.320
$1.7V \leq V_{OUT} < 2.0V$		0.100	0.140		0.200	0.280
$2.0V \leq V_{OUT} < 2.5V$		0.085	0.120		0.170	0.240
$2.5V \leq V_{OUT} < 2.8V$		0.070	0.100		0.140	0.200
$2.8V \leq V_{OUT} \leq 3.3V$		0.060	0.095		0.120	0.190

TYPICAL APPLICATION

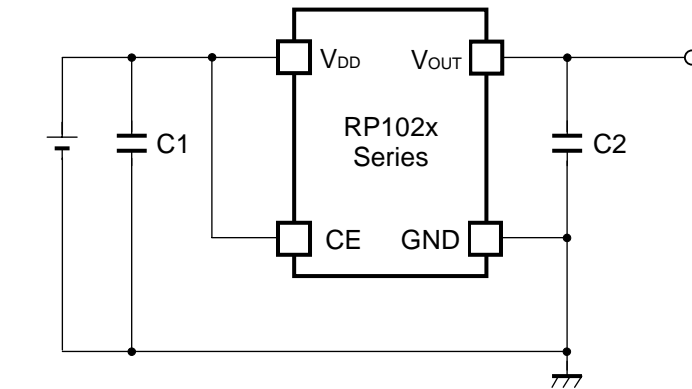

(External Components)

C2 1.0 μ F MURATA: GRM155B31A105KE15

TECHNICAL NOTES

When using these ICs, consider the following points:

Phase Compensation


In these ICs, phase compensation is made for securing stable operation even if the load current is varied. For this purpose, use a capacitor C2 with good frequency characteristics and ESR (Equivalent Series Resistance). (Note: If additional ceramic capacitors are connected with parallel to the output pin with an output capacitor for phase compensation, the operation might be unstable. Because of this, test these ICs with as same external components as ones to be used on the PCB.)

PCB Layout


Make V_{DD} and GND lines sufficient. If their impedance is high, noise pickup or unstable operation may result. Connect a capacitor C1 with a capacitance value as much as 1.0 μ F or more between V_{DD} and GND pin, and as close as possible to the pins.

Set external components, especially the output capacitor C2, as close as possible to the ICs, and make wiring as short as possible.


TEST CIRCUITS

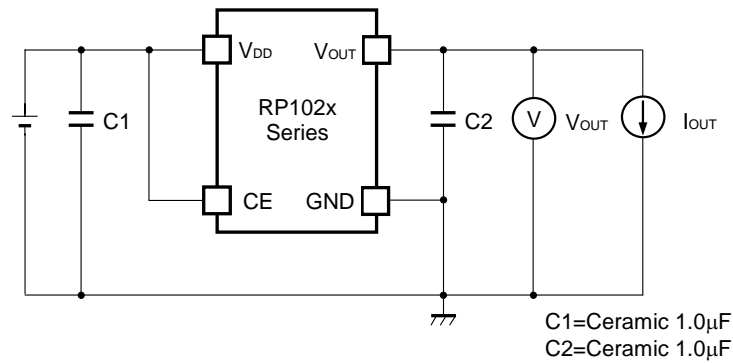


Basic Test Circuit

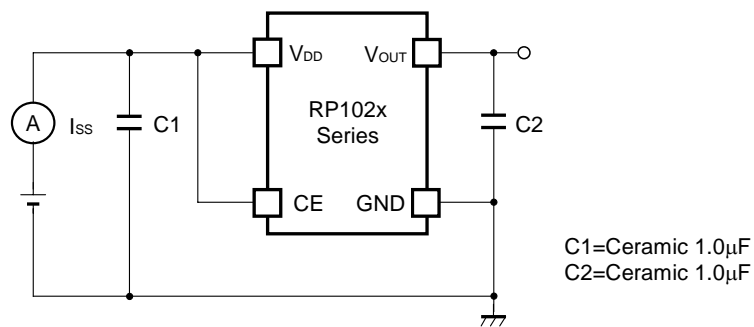

Test Circuit for Supply Current

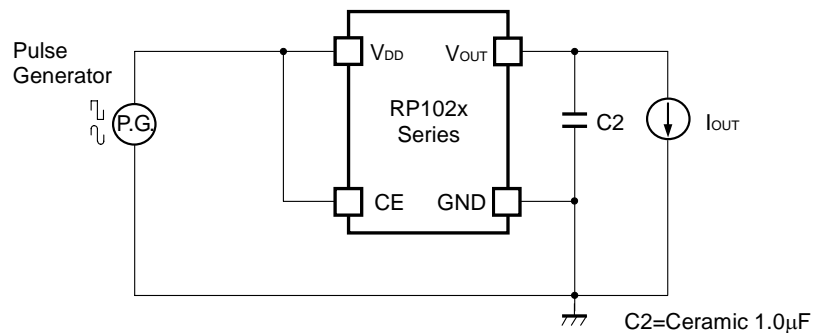




Test Circuit for Ripple Rejection

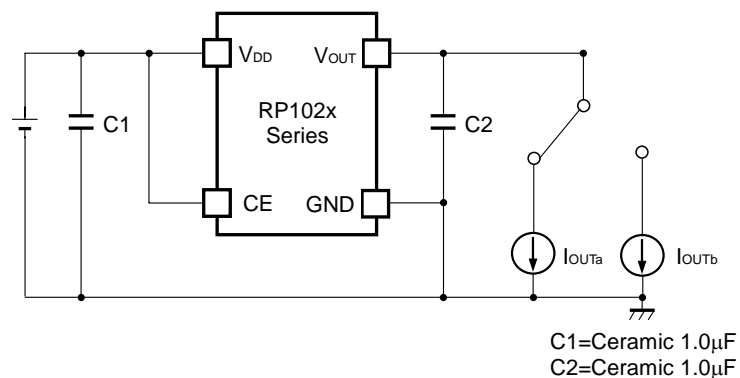



Test Circuit for Load Transient Response

TYPICAL CHARACTERISTIC


1) Output Voltage vs. Output Current ($C_{IN}=1.0\mu F$, $C_{OUT}=1.0\mu F$, $T_{opt}=25^{\circ}C$)

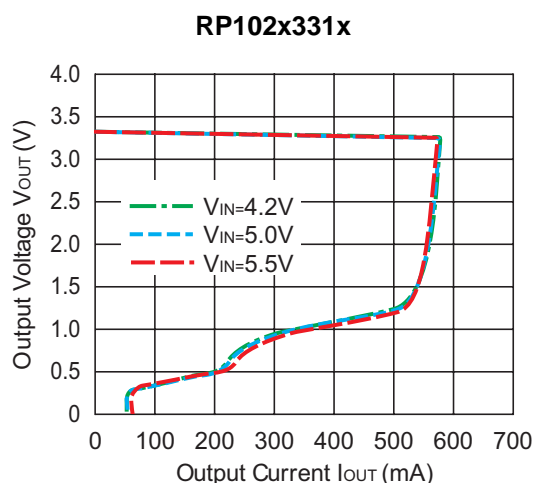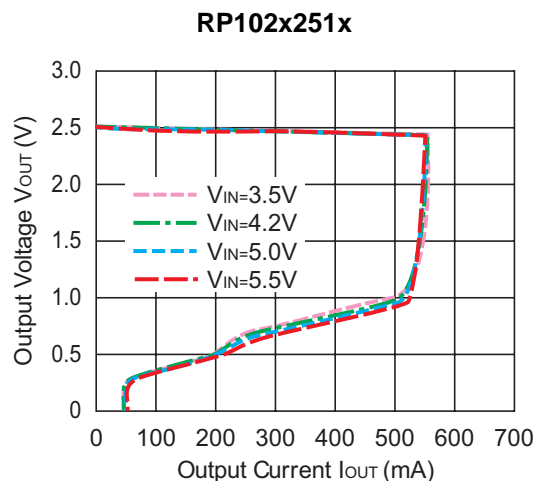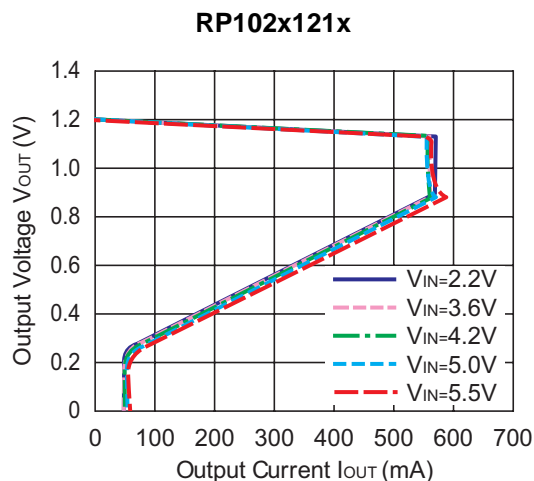

2) Output Voltage vs. Input Voltage ($C_{IN}=1.0\mu F$, $C_{OUT}=1.0\mu F$, $T_{opt}=25^{\circ}C$)

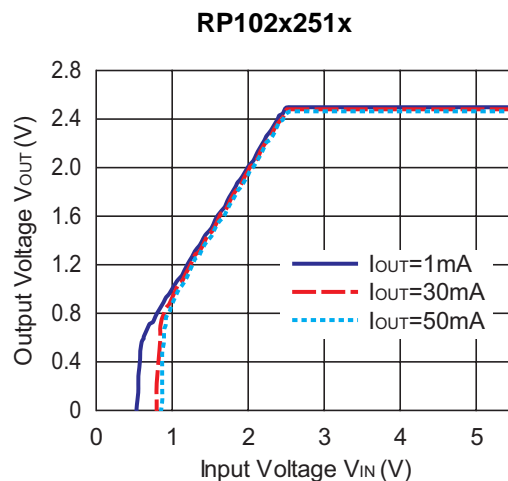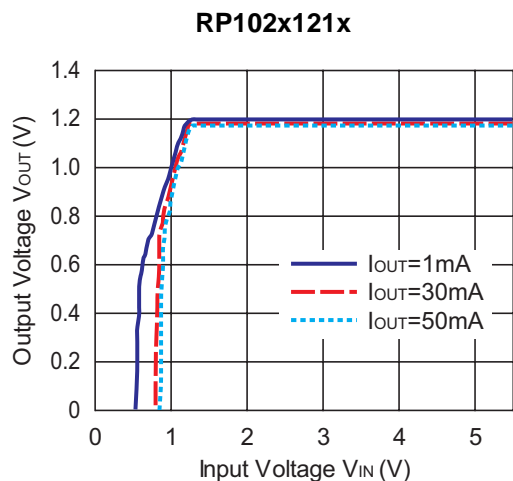


RP102x331x

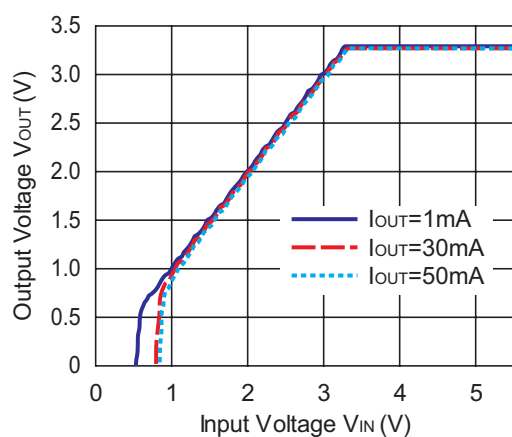


3) Supply Current vs. Input Voltage ($C_{IN}=1.0\mu\text{F}$, $C_{OUT}=1.0\mu\text{F}$, $T_{opt}=25^\circ\text{C}$)


RP102x121x

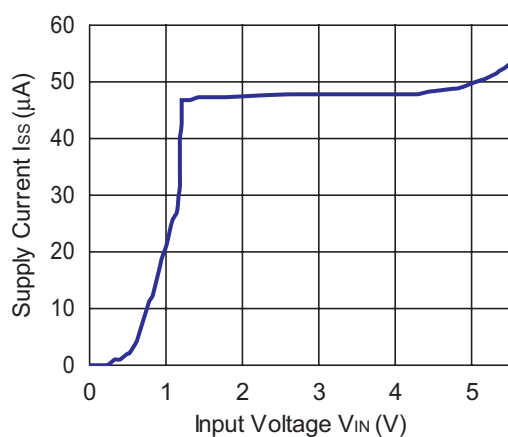




RP102x251x

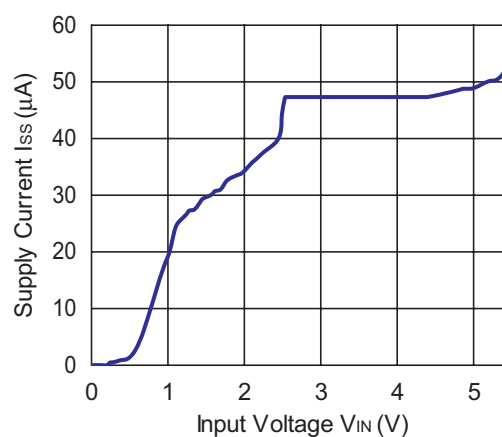



RP102x331x

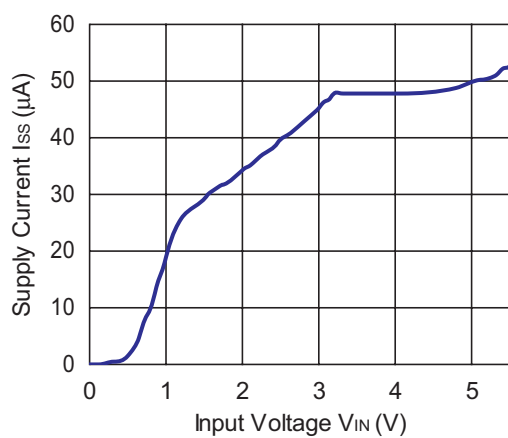


4) Output Voltage vs. Temperature ($C_{IN}=1.0\mu F$, $C_{OUT}=1.0\mu F$, $I_{OUT}=1mA$)

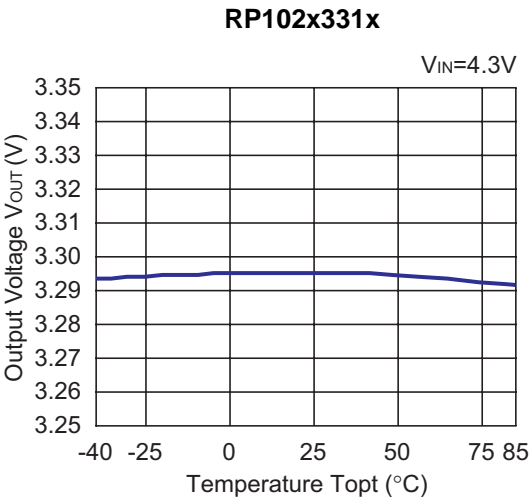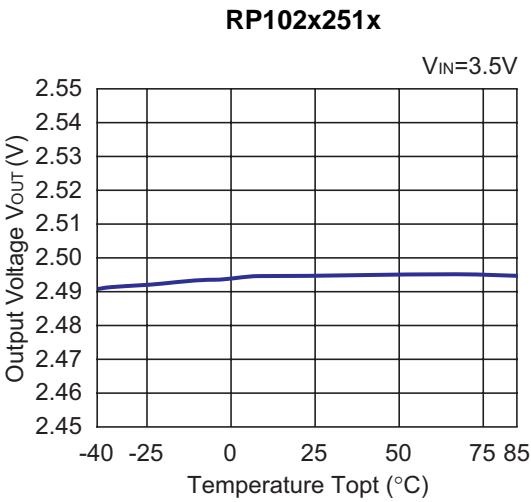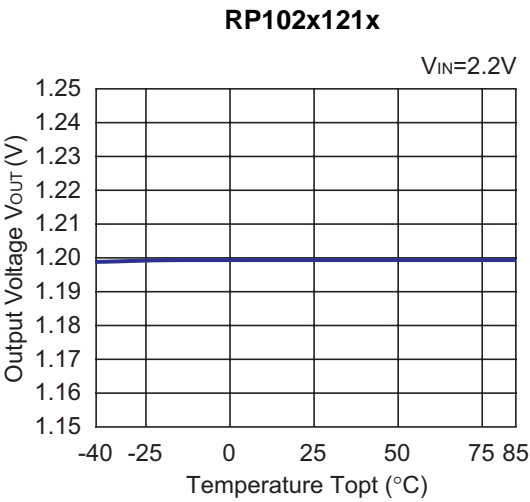

5) Supply Current vs. Temperature ($C_{IN}=1.0\mu F$, $C_{OUT}=1.0\mu F$, $I_{OUT}=0mA$)

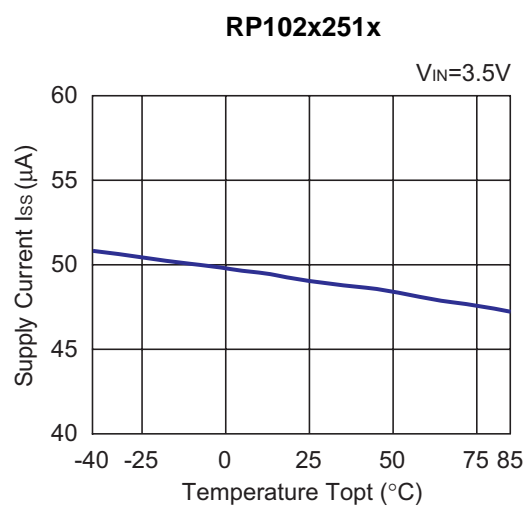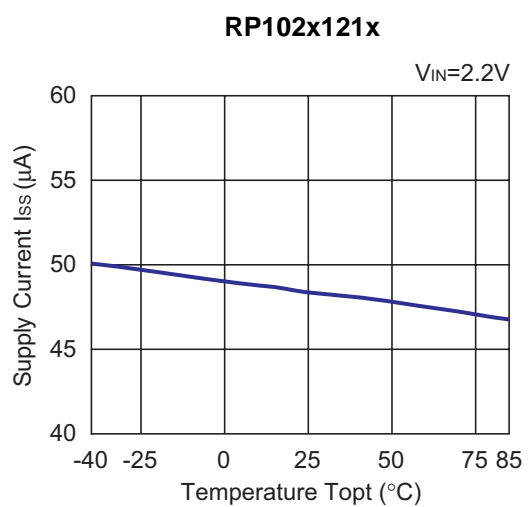


RP102x331x

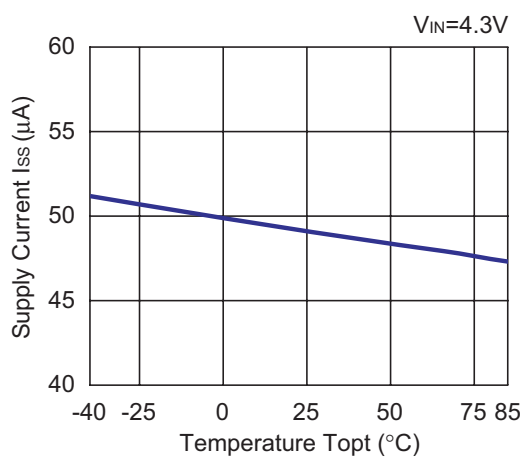


6) Dropout Voltage vs. Output Current ($C_{IN}=1.0\mu F$, $C_{OUT}=1.0\mu F$)


RP102x121x

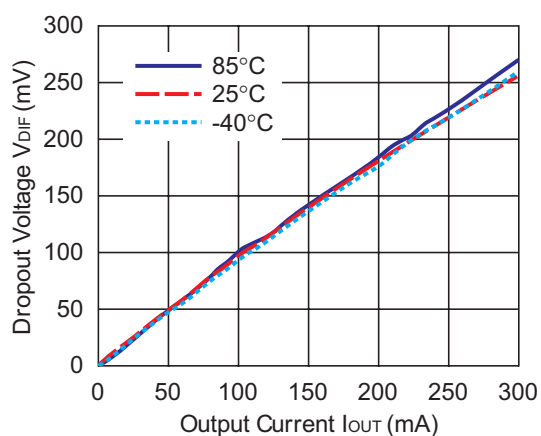


RP102x251x

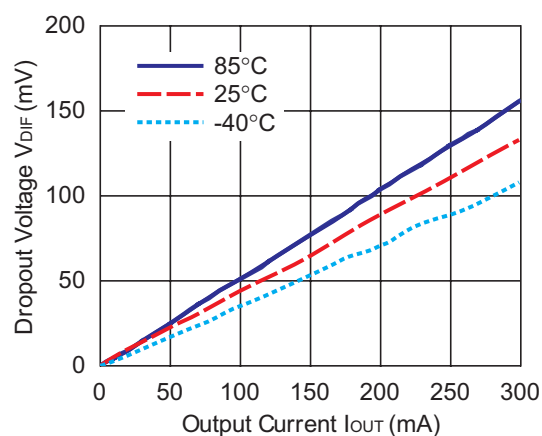

RP102x331x

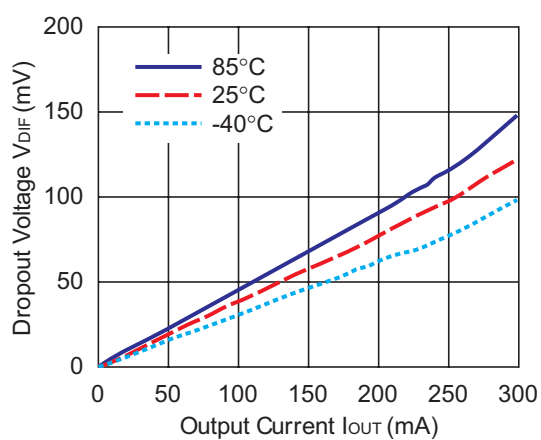


7) Dropout Voltage vs Set Output Voltage ($C_{IN}=1.0\mu F$, $C_{OUT}=1.0\mu F$, $T_{opt}=25^{\circ}C$)

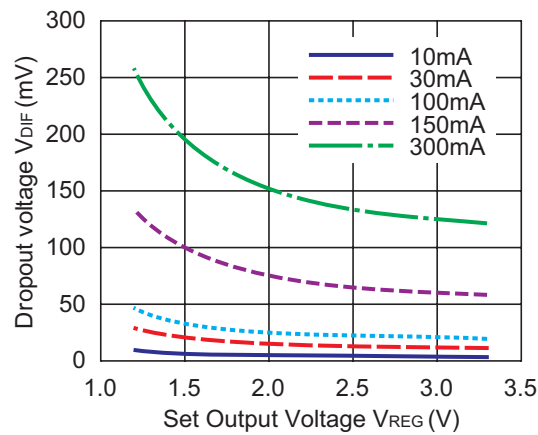


8) Ripple Rejection vs. Input Bias Voltage ($C_{IN}=none$, $C_{OUT}=1.0\mu F$, $Ripple=0.2Vp-p$, $T_{opt}=25^{\circ}C$)


RP102x121x

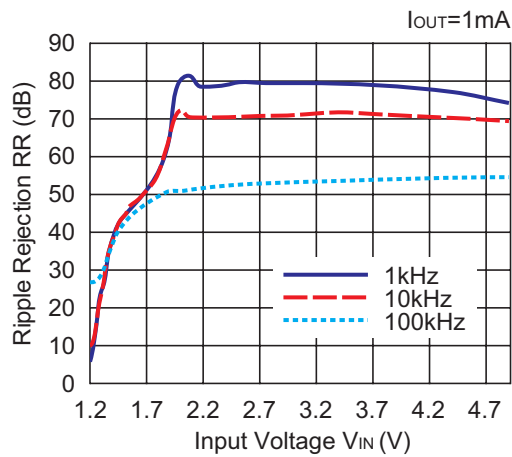


RP102x121x

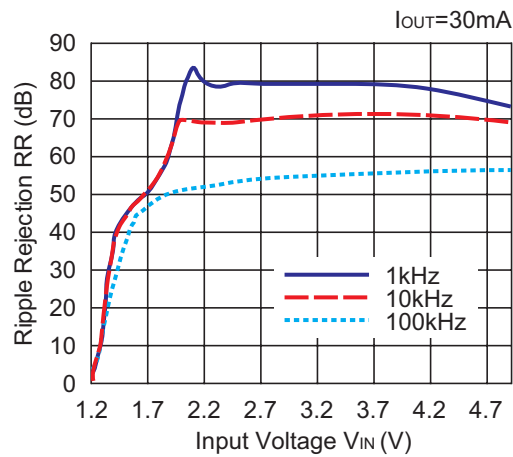






RP102x281x

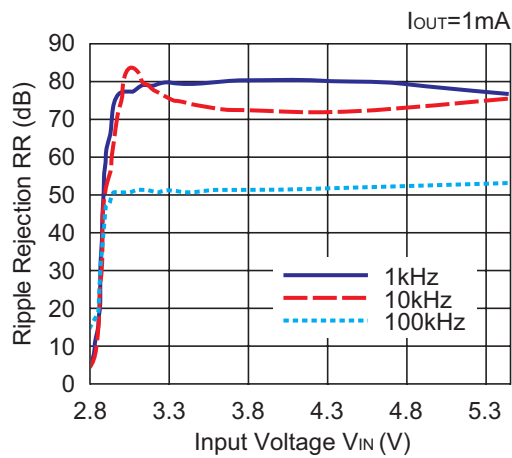


RP102x281x

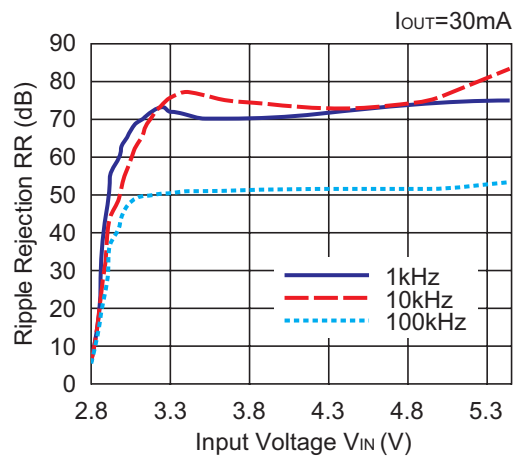

9) Ripple Rejection vs. Frequency ($C_{IN}=1.0\mu F$, $C_{OUT}=1.0\mu F$, Ripple=0.2Vp-p)

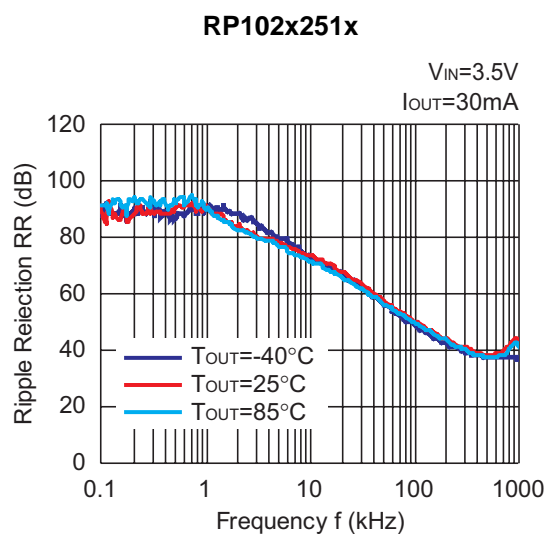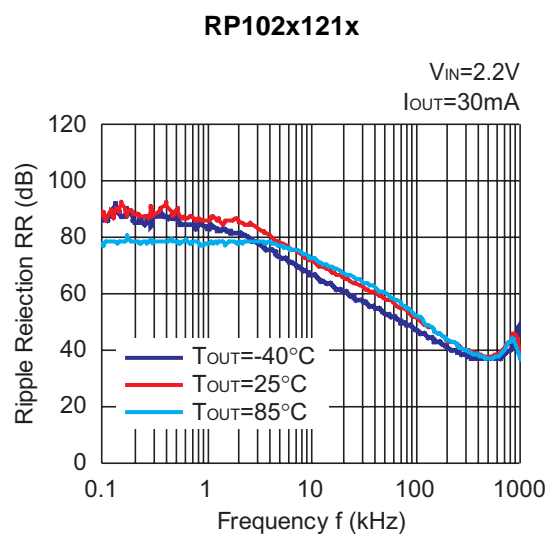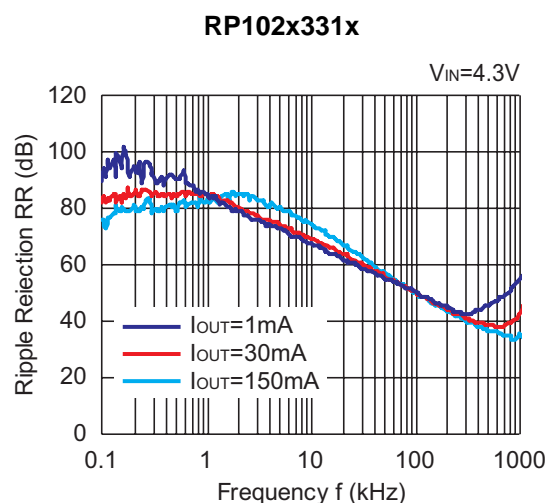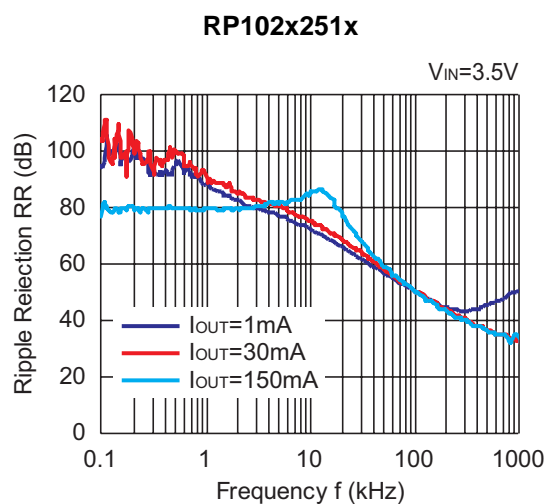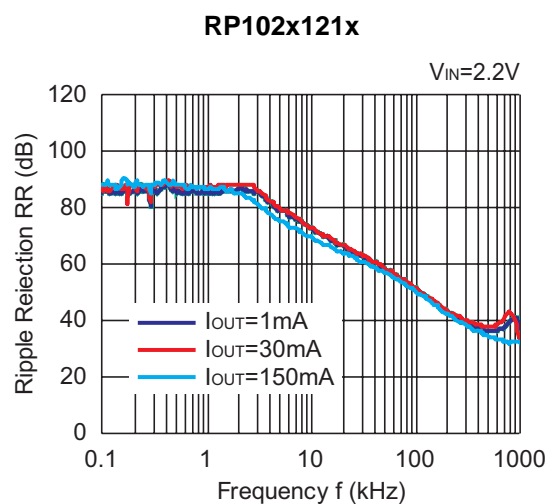


RP102x331x

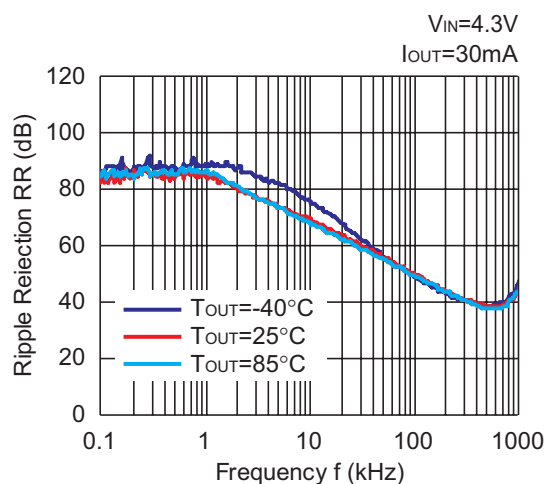


10) Input Transient Response ($C_{IN}=none$, $C_{OUT}=1.0\mu F$, $I_{OUT}=30mA$, $t_r=t_f=5\mu s$, $T_{opt}=25^{\circ}C$)


RP102x121x

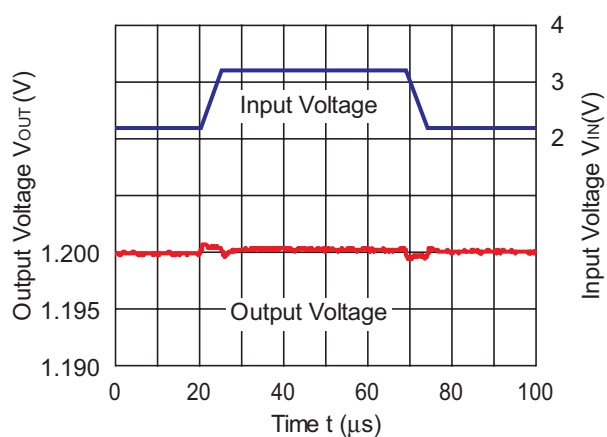

RP102x251x

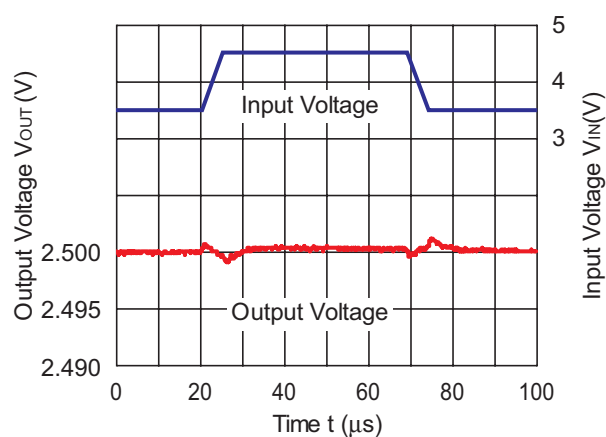


RP102x331x

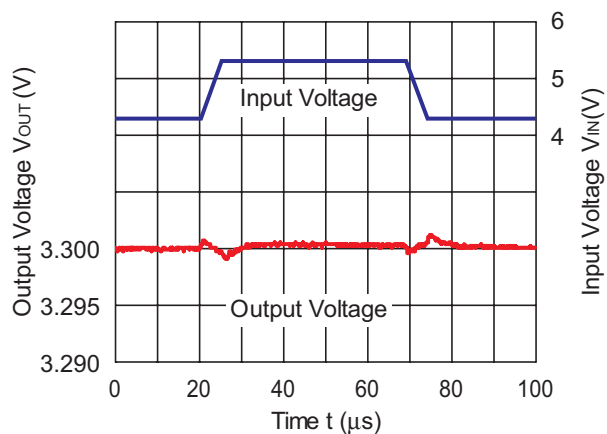


11) Load Transient Response ($C_{OUT}=1.0\mu F$, $T_{opt}=25^{\circ}C$)


RP102x121x

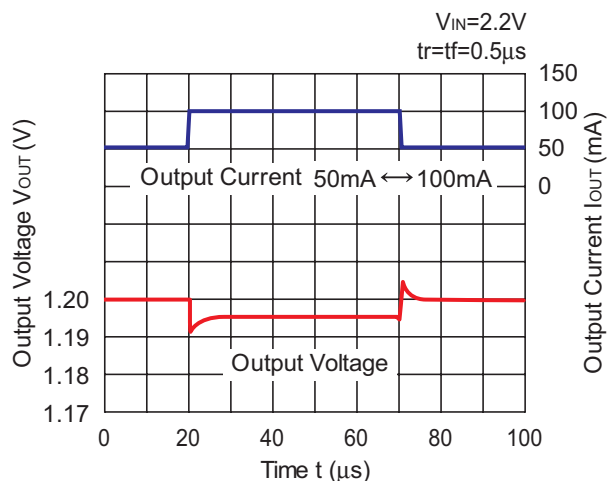


RP102x251x

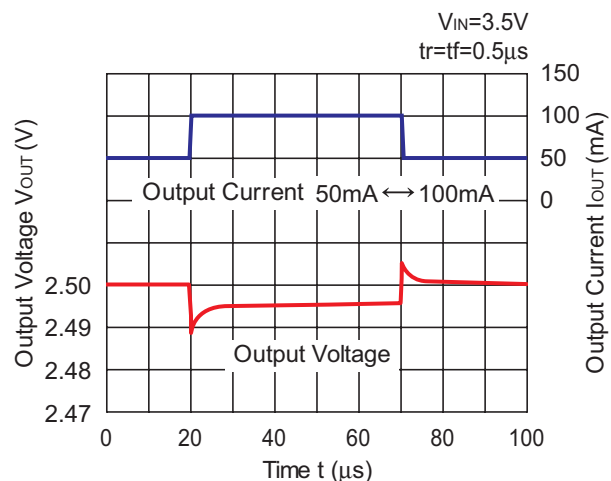


RP102x331x

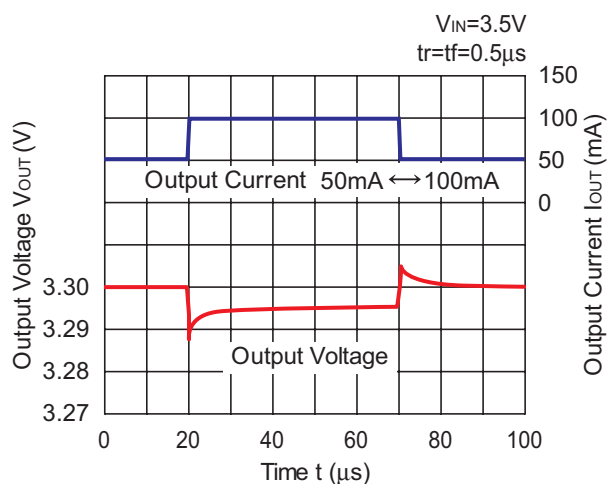


RP102x121x

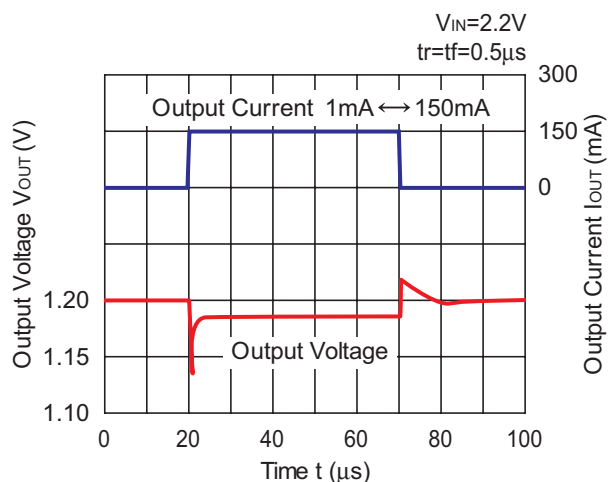

RP102x251x

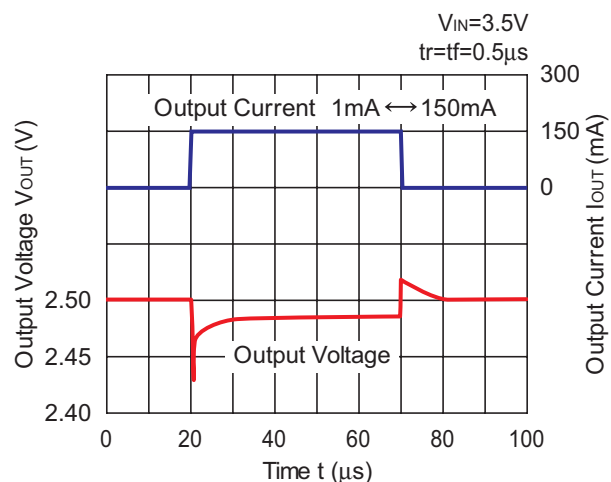


RP102x331x

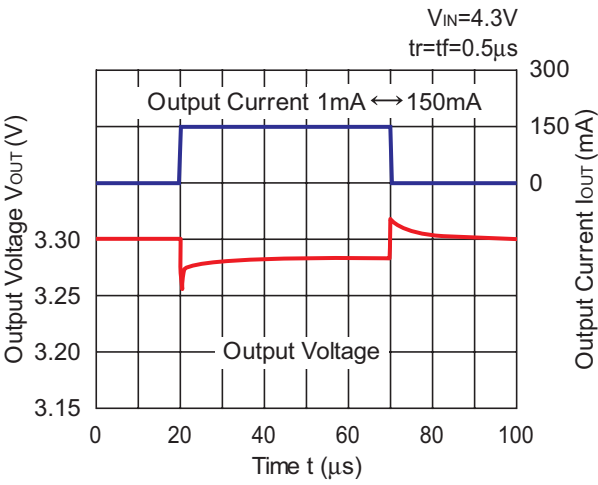


12) Turn On Speed with CE pin ($C_{IN}=1.0\mu F$, $C_{OUT}=1.0\mu F$, $T_{opt}=25^{\circ}C$)


RP102x121x

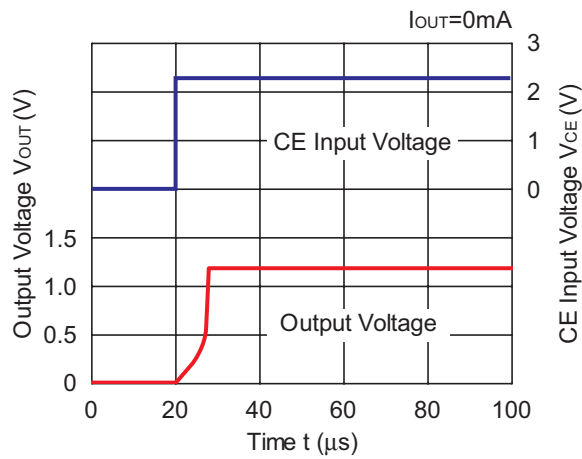


RP102x121x

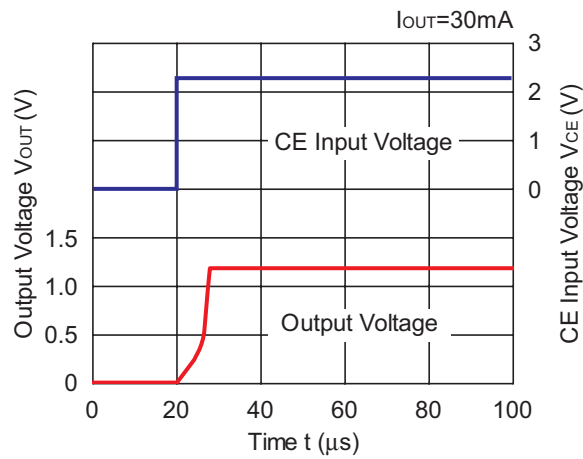


RP102x121x

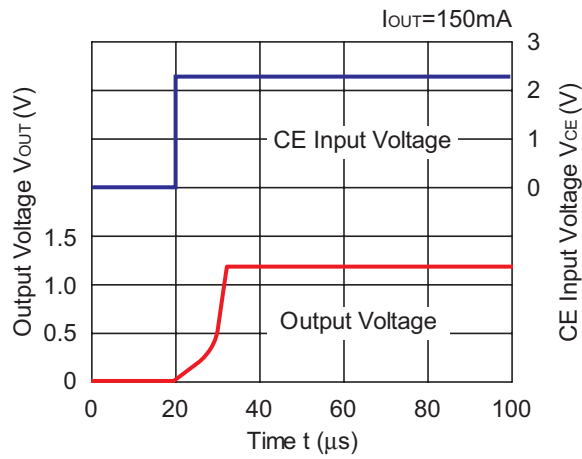


RP102x251x

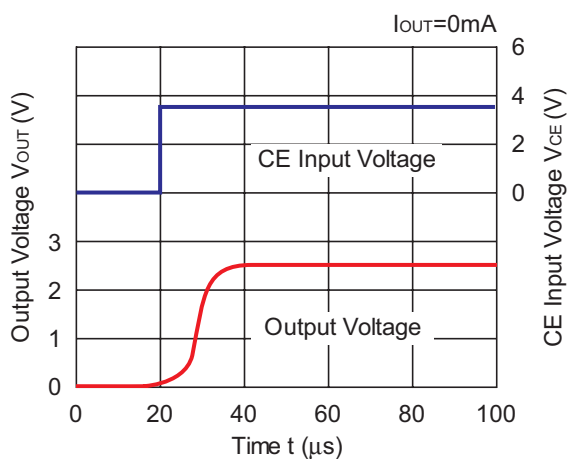


RP102x251x

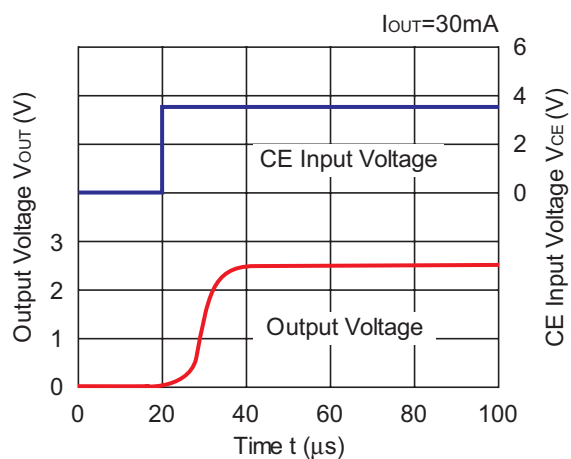


RP102x251x

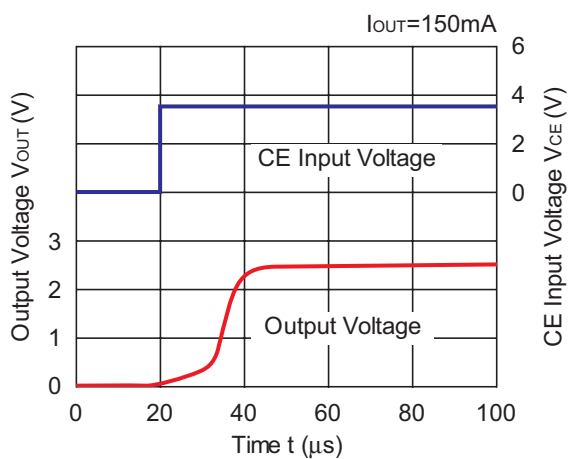


RP102x331x

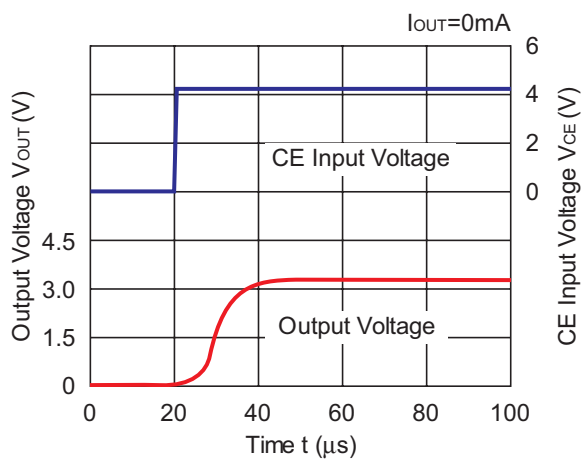

RP102x331x

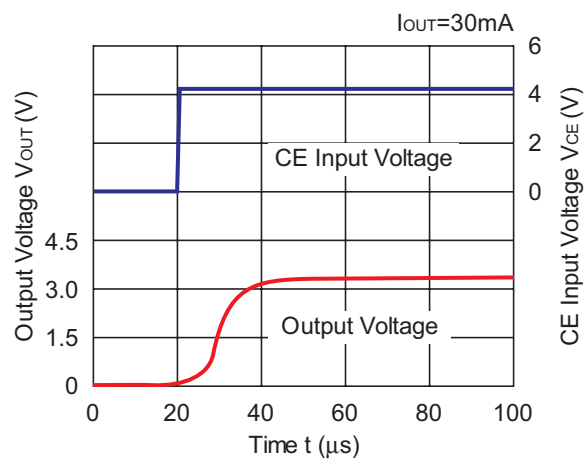


RP102x331x

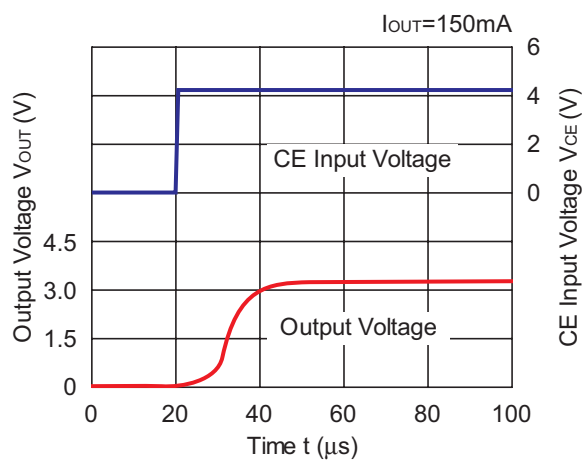


13) Turn OFF Speed with CE pin (D Version) ($C_{IN}=1.0\mu F$, $C_{OUT}=1.0\mu F$, $T_{opt}=25^{\circ}C$)


RP102x121D

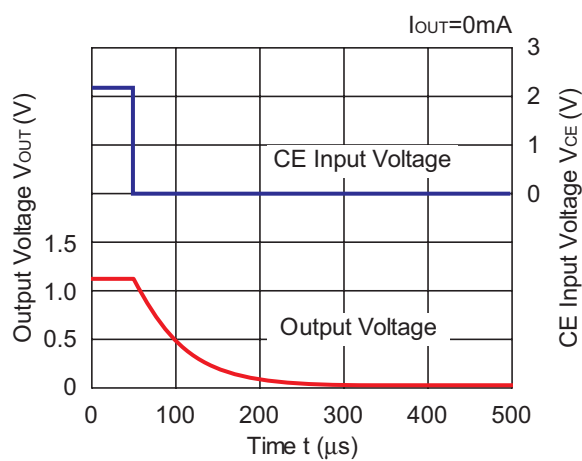


RP102x121D

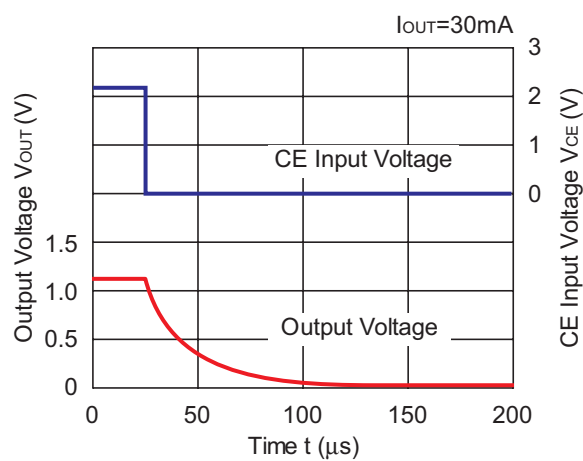


RP102x121D

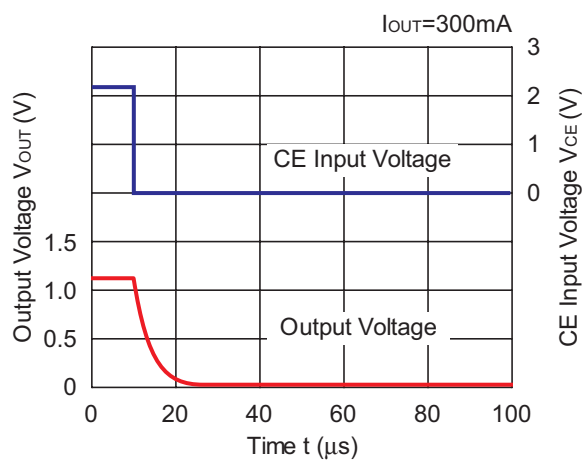


RP102x251x

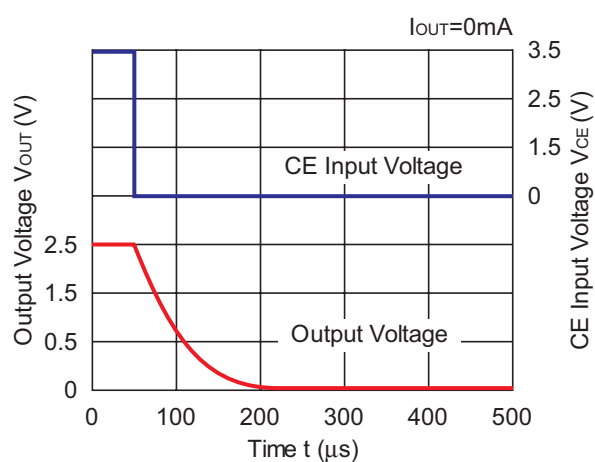


RP102x251x

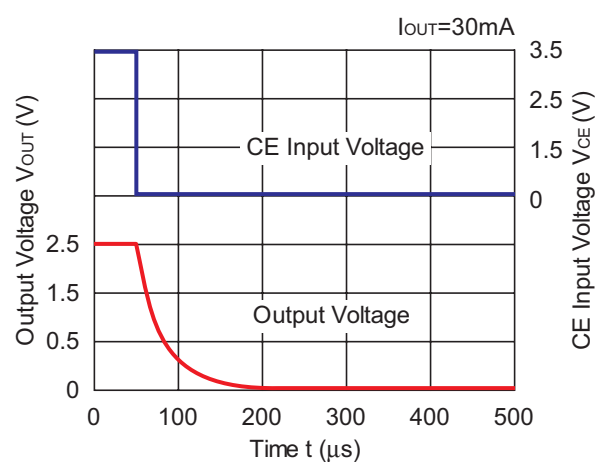


RP102x251x

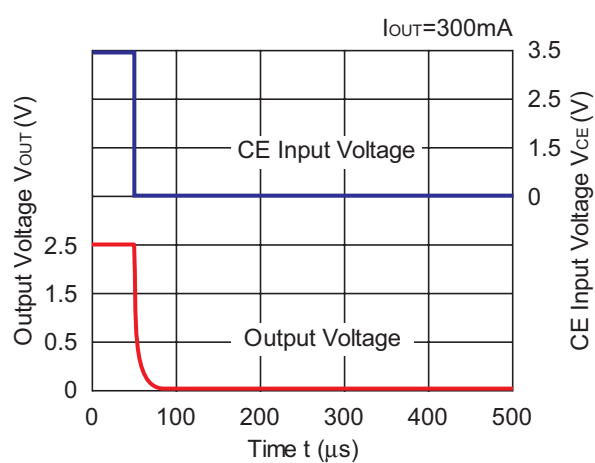


RP102x331x

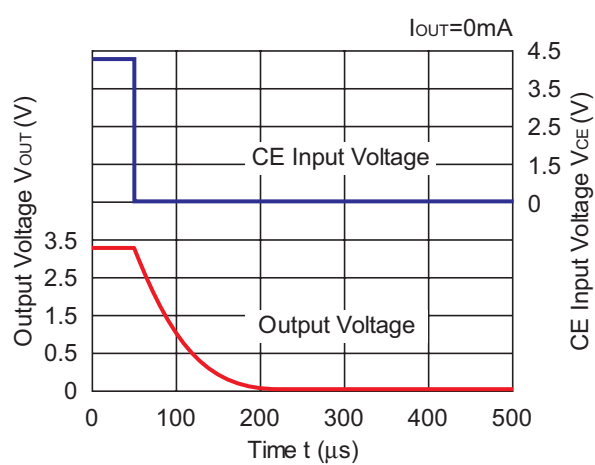

RP102x331x

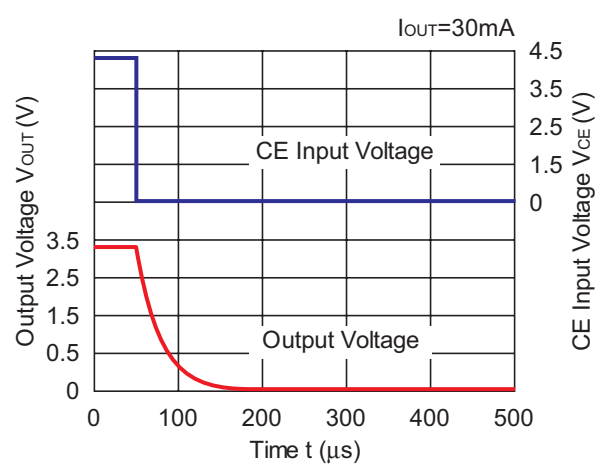

RP102x331x

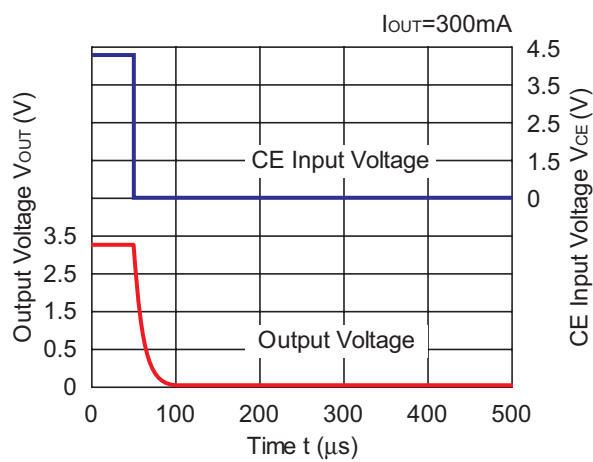

ESR vs. Output Current

When using these ICs, consider the following points:




The relations between I_{OUT} (Output Current) and ESR of an output capacitor are shown below.

The conditions when the white noise level is under $40\mu V$ (Avg.) are marked as the hatched area in the graph.

Measurement conditions

Frequency Band: 10Hz to 2MHz

Temperature: $-40^{\circ}C$ to $85^{\circ}C$

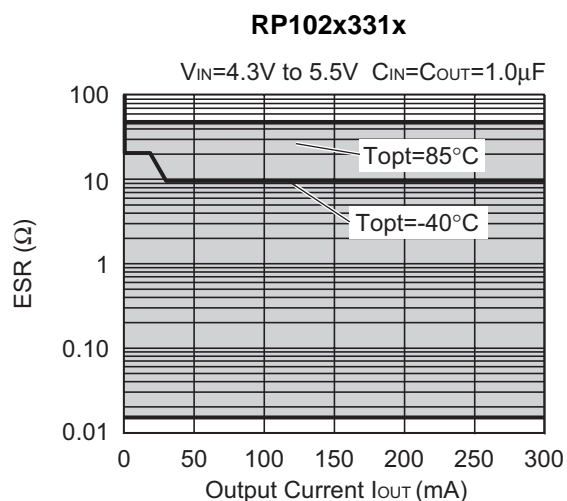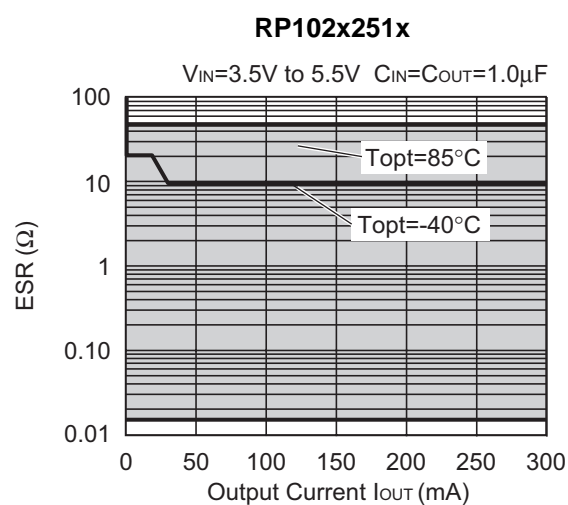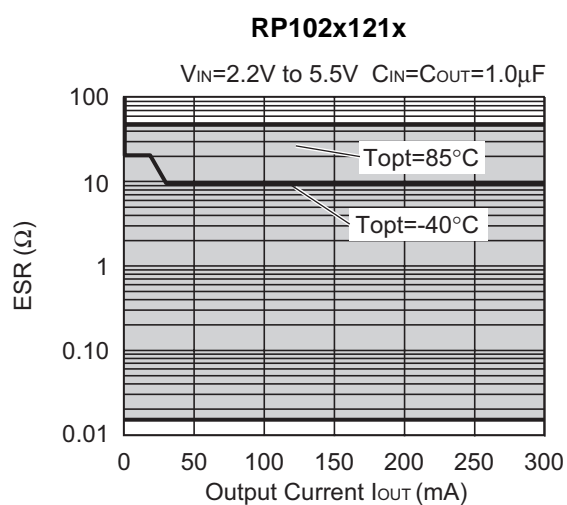



1. The products and the product specifications described in this document are subject to change or discontinuation of production without notice for reasons such as improvement. Therefore, before deciding to use the products, please refer to Ricoh sales representatives for the latest information thereon.
2. The materials in this document may not be copied or otherwise reproduced in whole or in part without prior written consent of Ricoh.
3. Please be sure to take any necessary formalities under relevant laws or regulations before exporting or otherwise taking out of your country the products or the technical information described herein.
4. The technical information described in this document shows typical characteristics of and example application circuits for the products. The release of such information is not to be construed as a warranty of or a grant of license under Ricoh's or any third party's intellectual property rights or any other rights.
5. The products listed in this document are intended and designed for use as general electronic components in standard applications (office equipment, telecommunication equipment, measuring instruments, consumer electronic products, amusement equipment etc.). Those customers intending to use a product in an application requiring extreme quality and reliability, for example, in a highly specific application where the failure or misoperation of the product could result in human injury or death (aircraft, spacevehicle, nuclear reactor control system, traffic control system, automotive and transportation equipment, combustion equipment, safety devices, life support system etc.) should first contact us.
6. We are making our continuous effort to improve the quality and reliability of our products, but semiconductor products are likely to fail with certain probability. In order to prevent any injury to persons or damages to property resulting from such failure, customers should be careful enough to incorporate safety measures in their design, such as redundancy feature, firecontainment feature and fail-safe feature. We do not assume any liability or responsibility for any loss or damage arising from misuse or inappropriate use of the products.
7. Anti-radiation design is not implemented in the products described in this document.
8. Please contact Ricoh sales representatives should you have any questions or comments concerning the products or the technical information.

RICOH COMPANY., LTD. Electronic Devices Company



■ Ricoh presented with the Japan Management Quality Award for 1999.
Ricoh continually strives to promote customer satisfaction, and shares the achievements of its management quality improvement program with people and society.



■ Ricoh awarded ISO 14001 certification.

The Ricoh Group was awarded ISO 14001 certification, which is an international standard for environmental management systems, at both its domestic and overseas production facilities. Our current aim is to obtain ISO 14001 certification for all of our business offices.

<http://www.ricoh.com/LSI/>

RICOH COMPANY, LTD. Electronic Devices Company

● **Shin-Yokohama office (International Sales)**
3-2-3, Shin-Yokohama, Kohoku-ku, Yokohama City, Kanagawa 222-8530, Japan
Phone: +81-45-477-1697 Fax: +81-45-477-1698

RICOH EUROPE (NETHERLANDS) B.V.

● **Semiconductor Support Centre**
Prof. W.H.Keesomlaan 1, 1183 DL Amstelveen, The Netherlands
P.O.Box 114, 1180 AC Amstelveen
Phone: +31-20-5474-309 Fax: +31-20-5474-791

RICOH ELECTRONIC DEVICES KOREA Co., Ltd.

11 floor, Haesung 1 building, 942, Daechidong, Gangnamgu, Seoul, Korea
Phone: +82-2-2135-5700 Fax: +82-2-2135-5705

RICOH ELECTRONIC DEVICES SHANGHAI Co., Ltd.

Room403, No.2 Building, 690#Bi Bo Road, Pu Dong New district, Shanghai 201203,
People's Republic of China
Phone: +86-21-5027-3200 Fax: +86-21-5027-3299

RICOH COMPANY, LTD. Electronic Devices Company

● **Taipei office**
Room109, 10F-1, No.51, Hengyang Rd., Taipei City, Taiwan (R.O.C.)
Phone: +886-2-2313-1621/1622 Fax: +886-2-2313-1623




Ricoh completed the organization of the Lead-free production for all of our products. After Apr. 1, 2006, we will ship out the lead free products only. Thus, all products that will be shipped from now on comply with RoHS Directive.

Unit: mm

The drawing shows a mechanical part with the following features and dimensions:

- Front View:** A square with side length 0.79 . It has a circular feature labeled "INDEX" in the bottom-left corner. A feature control frame at the top left indicates a circular runout tolerance of 0.05 at $\times 4$ magnification. A feature control frame at the bottom right indicates a surface texture tolerance of 0.10 S.
- Top View:** A square with side length 0.50 . It contains four circular features arranged in a 2×2 grid. The grid is defined by dimension lines labeled "1" and "2" vertically, and "A" and "B" horizontally. A feature control frame at the bottom right indicates a circular runout tolerance of 0.05 M at $\times 4$ magnification, with a material condition symbol "S" and a feature identifier "AB".
- Bottom View:** A rectangular feature with a width of 0.08 ± 0.03 and a height of 0.40 ± 0.02 . It is positioned below the front view. A feature control frame at the bottom left indicates a circular runout tolerance of 0.06 S.

(1reel=5,000pcs)

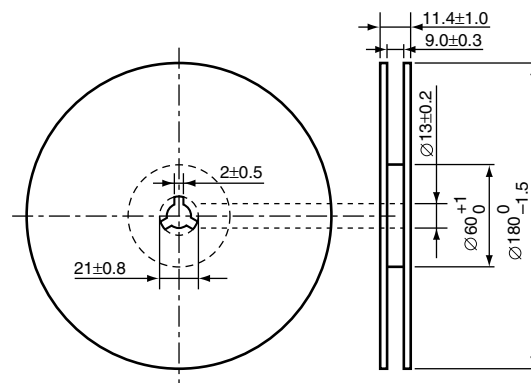

POWER DISSIPATION (WLCSP-4-P2)


This specification is at mounted on board. Power Dissipation (P_D) depends on conditions of mounting on board. This specification is based on the measurement at the condition below:

Measurement Conditions


	Standard Land Pattern
Environment	Mounting on Board (Wind velocity=0m/s)
Board Material	Glass cloth epoxy plastic (Double sided)
Board Dimensions	40mm × 40mm × 1.6mm
Copper Ratio	Top side : Approx. 50%, Back side : Approx. 50%
Through-holes	φ0.5mm × 4pcs

Measurement Results (T_{opt}=25°C, T_{jmax}=125°C)

	Standard Land Pattern
Power Dissipation	530mW
Thermal Resistance	θ _{ja} =(125–25°C)/0.53W=189°C/W

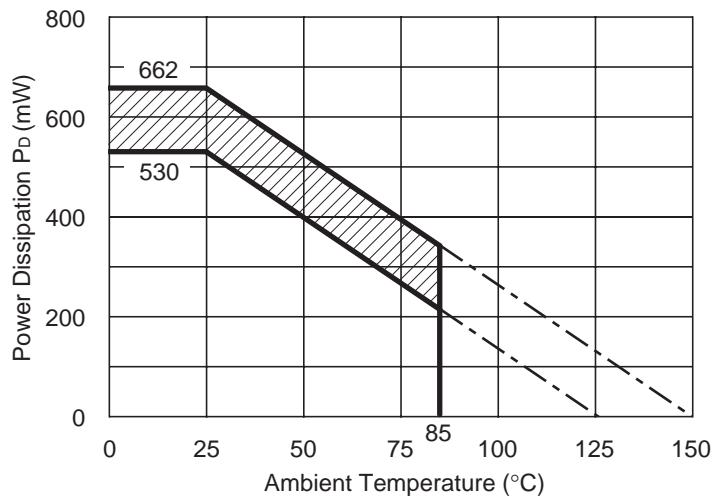

Power Dissipation

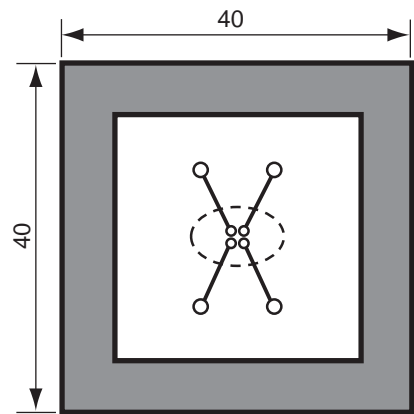

Measurement Board Pattern


○ IC Mount Area (Unit: mm)

The above graph shows the Power Dissipation of the package based on T_{jmax}=125°C and T_{jmax}=150°C. Operating the IC in the shaded area in the graph might have an influence it's lifetime. Operating time must be within the time limit described in the table below, in case of operating in the shaded area.

Product Name	Operating time	Estimated years*
RP102Z	13,000 hrs	9 years

*The volume is calculated on the supposition that operating four hours/day.

RECOMMENDED LAND PATTERN

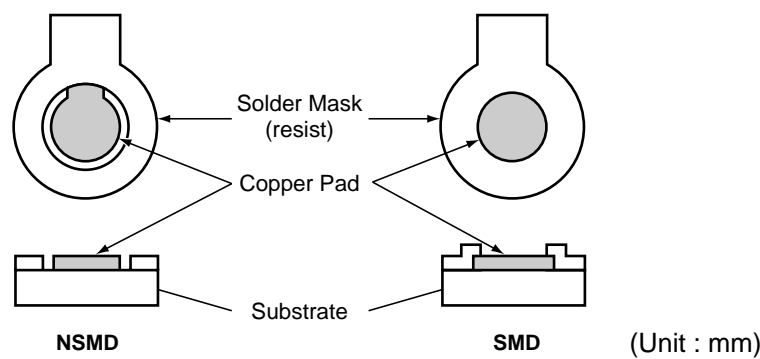

NSMD and SMD Pad Definition

Pad definition	Copper Pad	Solder Mask Opening
NSMD (Non-Solder Mask defined)	0.20mm	Min. 0.30mm
SMD (Solder Mask defined)	Min. 0.30mm	0.20mm

- * Pad layout and size can be modified by customers material, equipment, method.
- * Please adjust pad layout according to your conditions.
- * Recommended Stencil Aperture Size....ø0.3mm
- * Since lead free WL-CSP components are not compatible with the tin/lead solder process, you shall not mount lead free WL-CSP components using the tin/lead solder paste.

Bucaroff, Dan

From: kenshiro_tanaka@e-devices.ricoh.co.jp
Sent: Tuesday, February 10, 2015 12:26 AM
To: Ciobanu, Catalina
Cc: Alan.Sue@ricoh-usa.com; takashi_kobayashi@e-devices.ricoh.co.jp; yohko_wakayama@e-devices.ricoh.co.jp; tomohiro_okamoto@e-devices.ricoh.co.jp
Subject: Re: PO 100091240

Hi Catalina

Sorry for my late reply.
Please see below.

Sample PN: RP102Z181D-F
Reel PN: RP102Z181D-TR-F
Reel Qty: 5,000pcs
Price: USD0.08 (1 reel)

Because your requested Qty is 1,000pcs which is smaller than our Reel MOQ, we would like to ship samples by free of charge.

So could you change PO PN to RP102Z181D-F? Price is ok with 0(Zero).

Could you kindly let us know platform name using this LDO?

Sample PN: RP110L251D
Reel PN: RP110L251D-TR
Reel Qty: 10,000pcs
Price: USD0.03 (1 reel)

Your PN and Price are ok because we will ship 1,000pcs by free of charge too.

Could you kindly let us know platform name using this LDO?

Best regards,
Ken

***E-mail Address has been changed

Ricoh Electronic Devices Co., Ltd.
RICOH COMPANY, LTD.
North America Supporting team
Overseas Sales Department

Kenshiro Tanaka
kenshiro_tanaka@e-devices.ricoh.co.jp
+81-50-3814-1468

"Ciobanu,
Catalina"

<cciobanu@qti.qualcomm.com> 宛先
Yohko Wakayama/S/REDC@REDC
cc
2015/02/06 15:43 "Alan.Sue@ricoh-usa.com"
<Alan.Sue@ricoh-usa.com>, Kenshiro
Tanaka/S/REDC@REDC, Takashi
Kobayashi/S/REDC@REDC
件名
PO 100091240

Hi Yohko,

Please find attached PO 100091240. These are new parts. Please provide price, reel size and standard lead times for these 2 parts I placed PO for:

281-67677-01R8 / MPN RP102Z181D-TR-F

281-79991-02R5 / RP110L251D

Please also provide delivery dates.

Thank you,

Catalina Ciobanu

Phone: (858) 651 ? 0778

5525 Morehouse Drive

San Diego, CA 92121

[添付ファイル "100091240_0.pdf" は Kenshiro Tanaka/S/REDC が削除しました]