


| iNAND Products |             |        |                |       |                 |                   |             |
|----------------|-------------|--------|----------------|-------|-----------------|-------------------|-------------|
| Part Number    | Interface   | Family | Operating Temp | Cap   | Seq. R/W (MB/s) | Random R/W (IOPS) | Package     |
| SDIN7DP2-4G    | 4.51        | OEM    | -25°C+85°C     | 4GB   | 90/12           | 2500/400          | 11.5x13x1.0 |
| 8GB            |             |        |                |       |                 |                   |             |
| SDIN8DE1-8G    | 4.51 HS 200 | OEM    | -25°C+85°C     | 8GB   | 90/18           | 4500/900          | 11.5x13x1.0 |
| SDIN8DE2-8G    | 4.51 HS 200 | OEM    | -25°C+85°C     | 8GB   | 120/30          | 4500/900          | 11.5x13x1.0 |
| SDIN9DS2-8G    | 5.0 HS 400  | OEM    | -25°C+85°C     | 8GB   | 250/13          | 3300/1000         | 11.5x13x8.0 |
| 16GB           |             |        |                |       |                 |                   |             |
| SDIN8DE2-16G   | 4.51 HS 200 | OEM    | -25°C+85°C     | 16GB  | 120/30          | 4500/1200         | 11.5x13x1.0 |
| SDIN7DP4-16G   | 4.51        | OEM    | -25°C+85°C     | 16GB  | 90/45           | 3500/700          | 11.5x13x1.0 |
| SDIN9DS2-16G   | 5.0 HS 400  | OEM    | -25°C+85°C     | 16GB  | 280/24          | 3300/1400         | 11.5x13x8.0 |
| SDINADB4-16G   | 5.0+ HS 400 | OEM    | -25°C+85°C     | 16GB  | 280/24          | 3300/1400         | 11.5x13x8.0 |
| 32GB           |             |        |                |       |                 |                   |             |
| SDIN8DE4-32G   | 4.51 HS 200 | OEM    | -25°C+85°C     | 32GB  | 125/49          | 4500/1200         | 11.5x13x1.0 |
| SDIN9DS2-32G   | 5.0 HS 400  | OEM    | -25°C+85°C     | 32GB  | 280/40          | 3300/1700         | 11.5x13x0.8 |
| SDINADF4-32G   | 5.1 HS 400  | OEM    | -25°C+85°C     | 32GB  | 290/150         | 3100/1800         | 11.5x13x0.9 |
| 64GB           |             |        |                |       |                 |                   |             |
| SDIN8DE4-64G   | 4.51 HS 200 | OEM    | -25°C+85°C     | 64GB  | 125/49          | 4500/1200         | 11.5x13x1.2 |
| SDIN9DS2-64G   | 5.0 HS 400  | OEM    | -25°C+85°C     | 64GB  | 220/36          | 3300/1600         | 11.5x13x1.0 |
| SDINADF4-64G   | 5.1 HS 400  | OEM    | -25°C+85°C     | 64GB  | 290/150         | 3100/1800         | 11.5x13x1.0 |
| 128GB          |             |        |                |       |                 |                   |             |
| SDINADF4-128G  | 5.1 HS 400  | OEM    | -25°C+85°C     | 128GB | 290/150         | 3100/1800         | 11.5x13x1.2 |
| SDIN8CE4-128G  | 4.51 HS 200 | OEM    | -25°C+85°C     | 128GB | 125/49          | 4500/1200         | 12x16x1.4   |

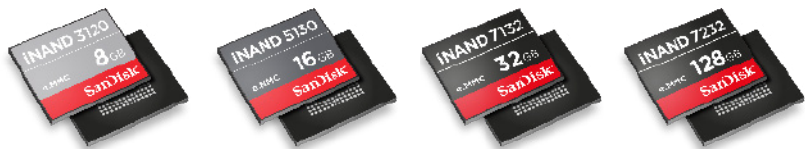

## Contact Information

For all inquiries, please email:  
oemproducts@sandisk.com

For more information, please visit:  
www.sandisk.com

# SanDisk®

**SanDisk Corporation, Corporate Headquarters**  
951 SanDisk Drive | Milpitas | CA 95035 | USA

**SanDisk International**  
The Concourse Building | Airside Business Park  
Swords | County Dublin | Ireland

© 2015 SanDisk Corporation. All rights reserved.  
SanDisk and iNAND are trademarks of SanDisk Corporation, registered in the United States and other countries.

At SanDisk, we're expanding the possibilities of data storage. For more than 25 years, SanDisk's ideas have helped transform the industry, delivering next generation storage solutions for consumers and businesses around the globe.