


Selected Electrical Specifications

(T_A = -10 to 75 °C)

Parameter	Test Condition	Min	Typ	Max	Unit
General					
Input clock reference		4	—	30	MHz
Supported XTAL frequency		16	—	30	MHz
Total power consumption	DVB-T ¹ /DVB-C ²	—	190/180	—	mW
	DVB-S ³	—	230	—	mW
	DVB-S2 ⁴	—	465	—	mW
Thermal resistance, θ _{JA}	2 layer PCB	—	32	—	°C/W
	4 layer PCB	—	23	—	°C/W
Power Supplies					
V _{DD_VCORE}		1.14	1.20	1.30	V
V _{DD_VANA}		3.00	3.30	3.60	V
V _{DD_VIO}		3.00	3.30	3.60	V
Notes:					
1. Test conditions: 8 MHz, 8K FFT, 64 QAM, parallel TS output.					
2. Test conditions: 6.9 Mbaud, 256 QAM, parallel TS output.					
3. Test conditions: 30 Mbaud, CR = 7/8, parallel TS (at QEF: BER = 2. 10 ⁻⁴).					
4. Test conditions: 32 Mbaud, 3/5 Code Rate, 8PSK, pilots On, parallel TS, C/N at picture failure.					

Pin Assignments

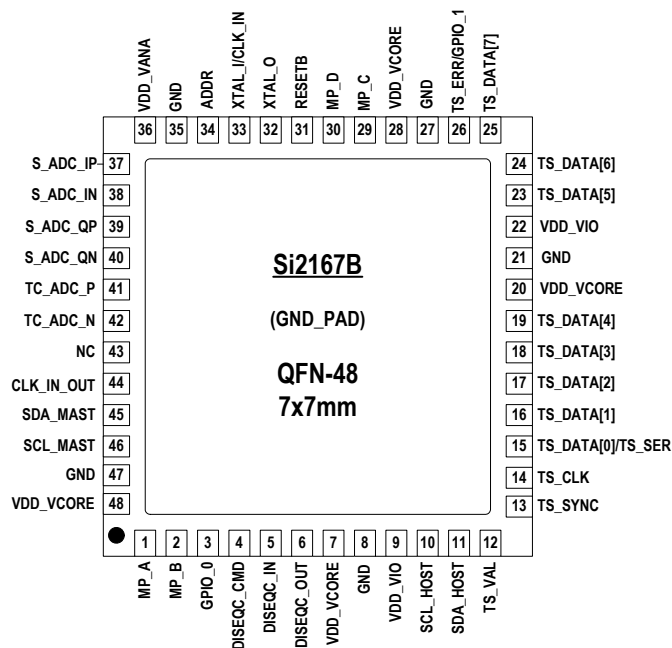

Selection Guide

Part Number	Description
Si2167-B22-GM	Multimedia Digital TV Demodulator for DVB-T/C/S/S2, 7x7 mm QFN-48.