

## TYPICAL DEVICE CHARACTERISTICS

## MAXIMUM RATINGS @ 25°C Unless Otherwise Specified

| PARAMETER                                                | SYMBOL    | VALUE      | UNITS |
|----------------------------------------------------------|-----------|------------|-------|
| Operating Temperature                                    | $T_L$     | -55 to 150 | °C    |
| Storage Temperature                                      | $T_{STG}$ | -55 to 150 | °C    |
| Peak Pulse Power (tp = 8/20μs) - See Figure 1            | $P_{PP}$  | 500        | Watts |
| Forward Voltage @ 50mA, 300μs - Square Wave (See Note 1) | $V_F$     | 1.5        | Volts |
| Soldering Temperature for 10 seconds                     | $T_{II}$  | 260        | °C    |

## NOTES

1. Only applies to unidirectional devices.

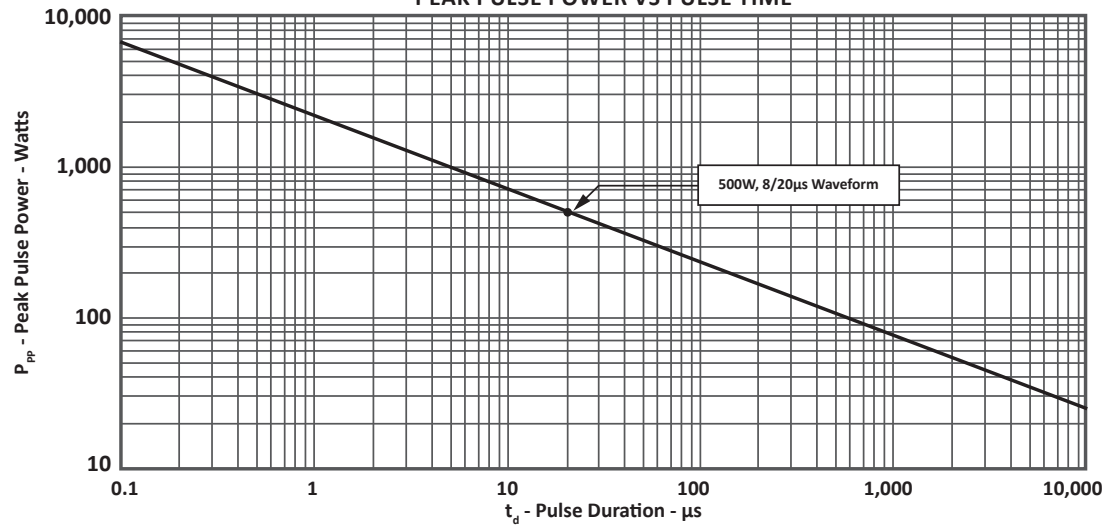
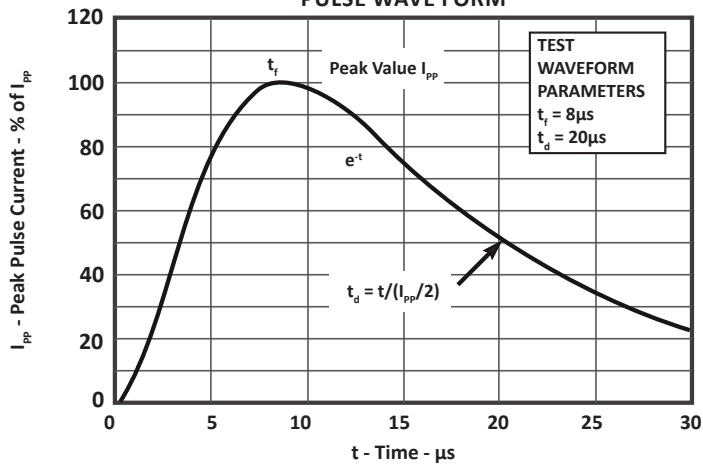
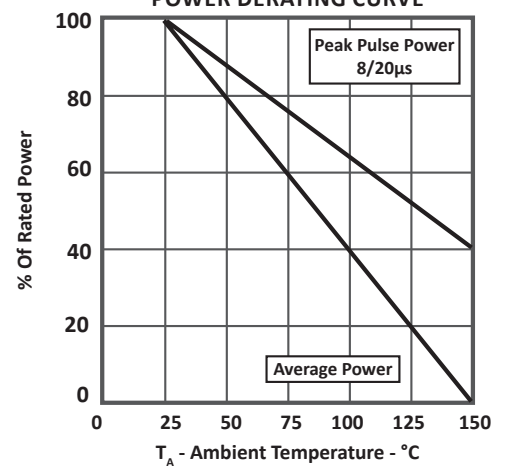
## ELECTRICAL CHARACTERISTICS PER LINE @ 25°C Unless Otherwise Specified

| PART NUMBER<br>(Note 1) | RATED STAND-OFF VOLTAGE<br><br>$V_{WM}$<br>VOLTS | MINIMUM BREAKDOWN VOLTAGE<br><br>@1mA<br>$V_{(BR)}$<br>VOLTS | MAXIMUM CLAMPING VOLTAGE (Fig. 2)<br><br>@ $I_p = 1A$<br>$V_C$<br>VOLTS | MAXIMUM CLAMPING VOLTAGE (Fig. 2)<br><br>@ 8/20μs<br>$V_C$ @ $I_{PP}$ | MAXIMUM LEAKAGE CURRENT<br><br>@ $V_{WM}$<br>$I_D$<br>μA | MAXIMUM CAPACITANCE<br><br>@0V, 1MHz<br>C<br>pF | TEMPERATURE COEFFICIENT OF $V_{(BR)}$<br><br>$qV_{(BR)}$<br>mV/°C |
|-------------------------|--------------------------------------------------|--------------------------------------------------------------|-------------------------------------------------------------------------|-----------------------------------------------------------------------|----------------------------------------------------------|-------------------------------------------------|-------------------------------------------------------------------|
| SM16LC03                | 3.3                                              | 4.5                                                          | 7.0                                                                     | 20.0V @ 35A                                                           | 125                                                      | 15                                              | -3                                                                |
| SM16LC03C               | 3.3                                              | 4.5                                                          | 7.0                                                                     | 20.0V @ 35A                                                           | 125                                                      | 15                                              | -3                                                                |
| SM16LC05                | 5.0                                              | 6.0                                                          | 9.8                                                                     | 24.0V @ 42A                                                           | 20                                                       | 15                                              | 3                                                                 |
| SM16LC05C               | 5.0                                              | 6.0                                                          | 9.8                                                                     | 24.0V @ 42A                                                           | 20                                                       | 15                                              | 3                                                                 |
| SM16LC08                | 8.0                                              | 8.5                                                          | 13.4                                                                    | 26.0V @ 30A                                                           | 10                                                       | 15                                              | 9                                                                 |
| SM16LC08C               | 8.0                                              | 8.5                                                          | 13.4                                                                    | 26.0V @ 30A                                                           | 10                                                       | 15                                              | 9                                                                 |
| SM16LC12                | 12.0                                             | 13.3                                                         | 19.0                                                                    | 33.0V @ 21A                                                           | 2                                                        | 15                                              | 16                                                                |
| SM16LC12C               | 12.0                                             | 13.3                                                         | 19.0                                                                    | 33.0V @ 21A                                                           | 2                                                        | 15                                              | 16                                                                |
| SM16LC15                | 15.0                                             | 16.7                                                         | 25.5                                                                    | 39.0V @ 15A                                                           | 2                                                        | 15                                              | 17                                                                |
| SM16LC15C               | 15.0                                             | 16.7                                                         | 25.5                                                                    | 39.0V @ 15A                                                           | 2                                                        | 15                                              | 17                                                                |
| SM16LC24                | 24.0                                             | 26.7                                                         | 40.0                                                                    | 57.0V @ 10A                                                           | 2                                                        | 15                                              | 26                                                                |
| SM16LC24C               | 24.0                                             | 26.7                                                         | 40.0                                                                    | 57.0V @ 10A                                                           | 2                                                        | 15                                              | 26                                                                |
| SM16LC36                | 36.0                                             | 40.0                                                         | 53.0                                                                    | 72.0V @ 7A                                                            | 2                                                        | 15                                              | 36                                                                |
| SM16LC36C               | 36.0                                             | 40.0                                                         | 53.0                                                                    | 72.0V @ 7A                                                            | 2                                                        | 15                                              | 36                                                                |

## NOTES

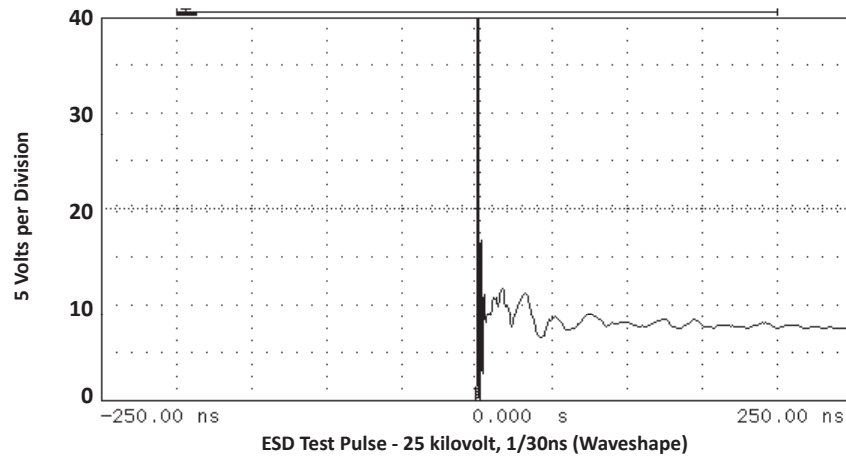
1. Part numbers with a "C" suffix are bidirectional devices, i.e., SM16LC05C.

## TYPICAL DEVICE CHARACTERISTICS

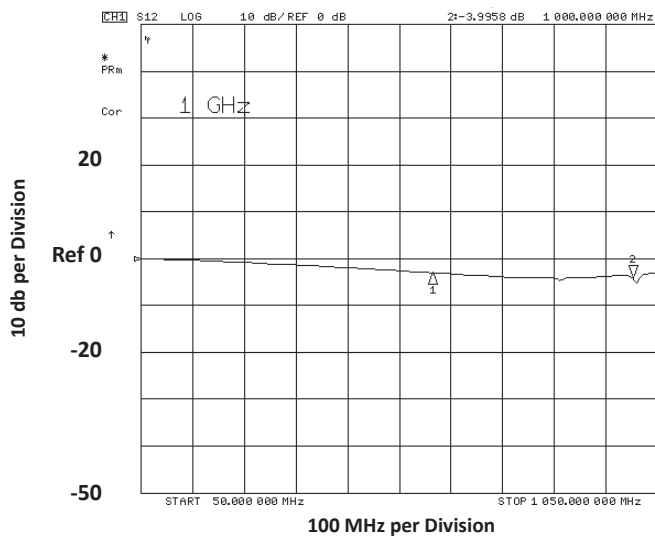
 FIGURE 1  
 PEAK PULSE POWER VS PULSE TIME

 FIGURE 2  
 PULSE WAVE FORM

 FIGURE 3  
 POWER DERATING CURVE


## TYPICAL DEVICE CHARACTERISTICS

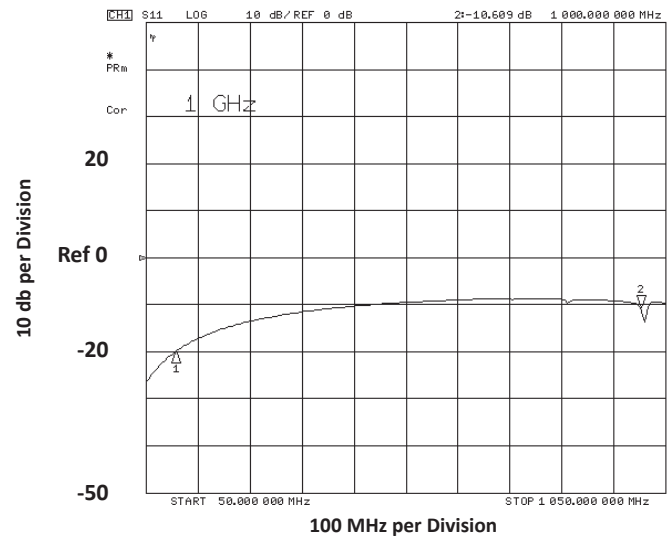
**FIGURE 4**  
**OVERSHOOT & CLAMPING VOLTAGE FOR SM16LC05**



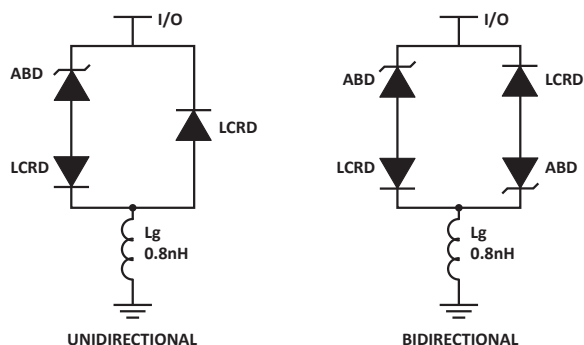
**FIGURE 5**  
**INSERTION LOSS - SM16LC12**



**FIGURE 5**  
**RETURN LOSS - SM16LC12**



## SPICE MODEL

**FIGURE 1**  
**SPICE MODEL**


ABD - Avalanche Breakdown Diode (TVS)

LCRD: Low Capacitance Rectifier Diode

Lg - Lead Inductance


**TABLE 1 - SPICE PARAMETERS**

| PARAMETER       | UNIT | ABD(TVS)    | LCRD  |
|-----------------|------|-------------|-------|
| BV              | V    | See Table 2 | 200   |
| IBV             | μA   | 1           | 0.01  |
| C <sub>jo</sub> | pF   | See Table 2 | 5     |
| I <sub>s</sub>  | A    | See Table 2 | 1E-13 |
| Vj              | V    | 0.6         | 0.6   |
| M               | -    | 0.33        | 0.33  |
| N               | -    | 1           | 1     |
| R <sub>s</sub>  | Ohms | See Table 2 | 0.31  |
| TT              | s    | 1E-8        | 1E-9  |
| EG              | eV   | 1.11        | 1.11  |

**TABLE 2 - ABD SPECIFIC SPICE PARAMETERS**

| PART NUMBER | B <sub>v</sub> (VOLTS) | C <sub>jo</sub> (pF) | I <sub>s</sub> (AMPS) | Rs(OHMS) |
|-------------|------------------------|----------------------|-----------------------|----------|
| SM16LC03    | 4.5                    | 438                  | 1E-11                 | 0.21     |
| SM16LC05    | 6.0                    | 284                  | 1E-11                 | 0.14     |
| SM16LC08    | 8.5                    | 146                  | 1E-11                 | 0.28     |
| SM16LC12    | 13.3                   | 123                  | 1E-13                 | 0.40     |
| SM16LC15    | 16.7                   | 102                  | 1E-13                 | 0.52     |
| SM16LC24    | 26.7                   | 61                   | 1E-13                 | 1.54     |
| SM16LC03C   | 4.5                    | 438                  | 1E-11                 | 0.21     |
| SM16LC05C   | 6.0                    | 284                  | 1E-11                 | 0.14     |
| SM16LC08C   | 8.5                    | 146                  | 1E-11                 | 0.28     |
| SM16LC12C   | 13.3                   | 123                  | 1E-13                 | 0.40     |
| SM16LC15C   | 16.7                   | 102                  | 1E-13                 | 0.52     |
| SM16LC24C   | 26.7                   | 61                   | 1E-13                 | 1.54     |

## APPLICATION INFORMATION

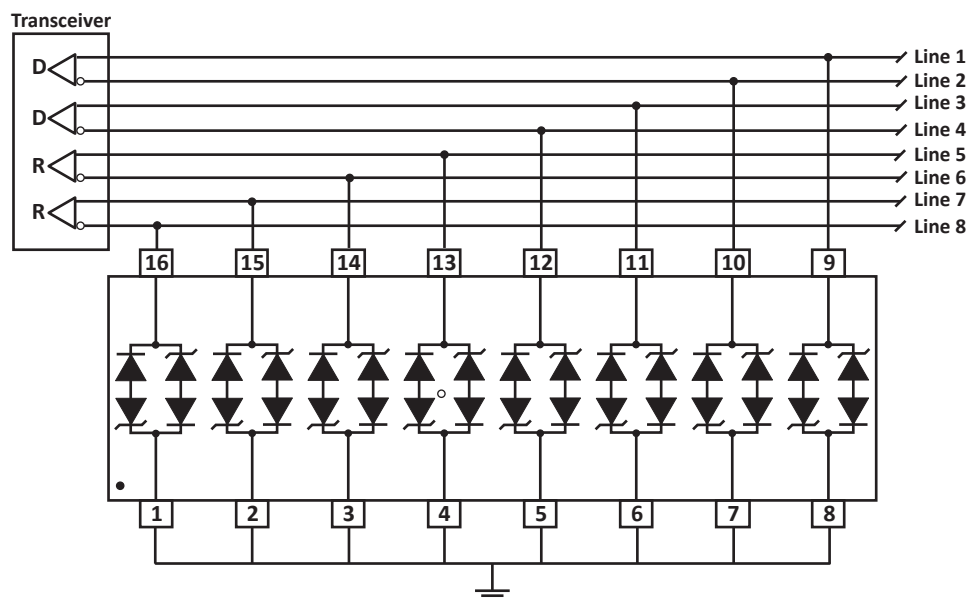

**FIGURE 1 - BIDIRECTIONAL COMMON-MODE PROTECTION**

Circuit connectivity is as follows:

- Line 1 connected to Pin 9.
- Line 2 connected to Pin 10.
- Line 3 connected to Pin 11.
- Line 4 connected to Pin 12.
- Line 5 connected to Pin 13.
- Line 6 connected to Pin 14.
- Line 7 connected to Pin 15.
- Line 8 connected to Pin 16.
- Pins 1 - 8 connected to ground.

## CIRCUIT BOARD RECOMMENDATIONS

Circuit board layout is critical for electromagnetic compatibility protection. The following guidelines are recommended:

- The protection device should be placed near the input terminals or connectors, the device will divert the transient current immediately before it can be coupled into the nearby traces.
- The path length between the TVS device and the protected line should be minimized.
- All conductive loops including power and ground loops should be minimized.
- The transient current return path to ground should be kept as short as possible to reduce parasitic inductance.
- Ground planes should be used whenever possible. For multilayer PCBs, use ground vias.

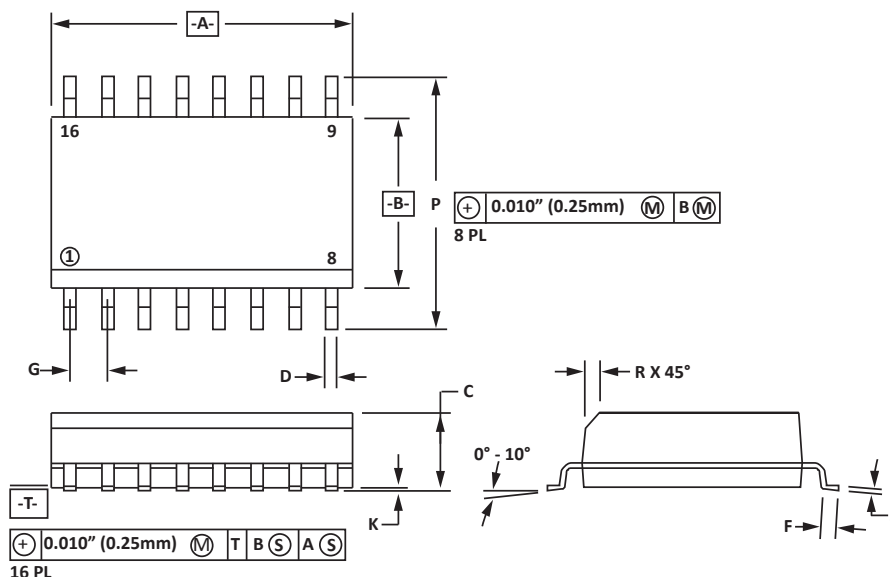
## SO-16 PACKAGE INFORMATION

## OUTLINE DIMENSIONS

| DIM | MILLIMETERS |       | INCHES   |       |
|-----|-------------|-------|----------|-------|
|     | MIN         | MAX   | MIN      | MAX   |
| A   | 9.80        | 10.00 | 0.386    | 0.393 |
| B   | 3.80        | 4.00  | 0.150    | 0.157 |
| C   | 1.35        | 1.75  | 0.054    | 0.068 |
| D   | 0.35        | 0.49  | 0.014    | 0.019 |
| F   | 0.40        | 1.25  | 0.016    | 0.049 |
| G   | 1.27 BSC    |       | 0.05 BSC |       |
| J   | 0.18        | 0.25  | 0.007    | 0.009 |
| K   | 0.10        | 0.25  | 0.004    | 0.008 |
| P   | 5.80        | 6.20  | 0.229    | 0.244 |
| R   | 0.25        | 0.50  | 0.010    | 0.019 |

## NOTES

1. -T- = Seating plane and datum surface.
2. Dimensions "A" and "B" are datum.
3. Dimensions "A" and "B" do not include mold protrusion.
4. Maximum mold protrusion is 0.015" (0.380mm) per side.
5. Dimensioning and tolerances per ANSI Y14.5M, 1982.
6. Dimensions are exclusive of mold flash and metal burrs.

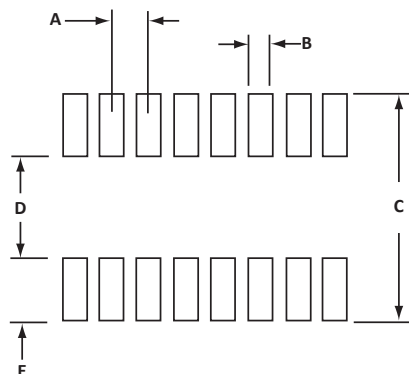


## PAD LAYOUT DIMENSIONS

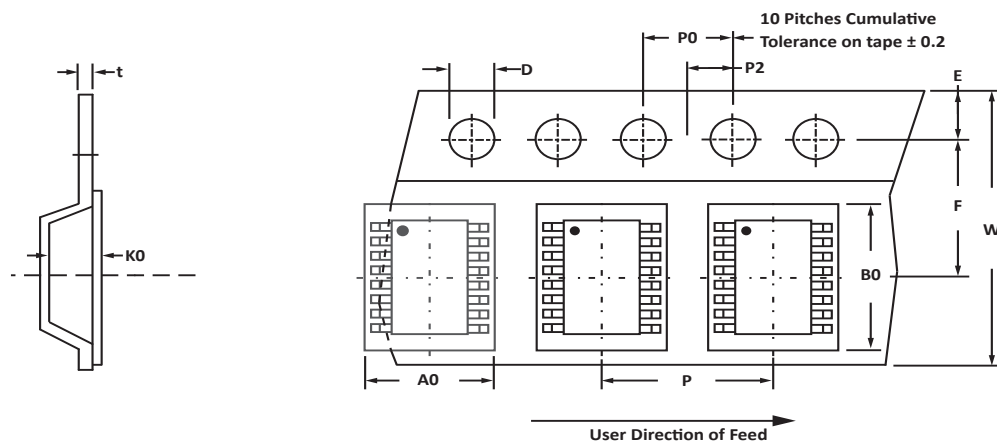
| DIM | MILLIMETERS |      | INCHES |       |
|-----|-------------|------|--------|-------|
|     | MIN         | MAX  | MIN    | MAX   |
| A   | 1.14        | 1.40 | 0.045  | 0.055 |
| B   | 0.64        | 0.89 | 0.025  | 0.035 |
| C   | 6.22        | -    | 0.245  | -     |
| D   | 3.94        | 4.17 | 0.155  | 0.165 |
| E   | 1.02        | 1.27 | 0.040  | 0.050 |

## NOTES

1. Controlling dimension: inches.



## TAPE AND REEL



## SPECIFICATIONS

| REEL DIA.  | TAPE WIDTH | A0          | B0           | K0          | D           | E           | F           | W            | P0          | P2          | P           | tmax |
|------------|------------|-------------|--------------|-------------|-------------|-------------|-------------|--------------|-------------|-------------|-------------|------|
| 178mm (7") | 16mm       | 6.50 ± 0.10 | 10.30 ± 0.10 | 2.10 ± 0.10 | 1.50 ± 0.10 | 1.75 ± 0.10 | 3.50 ± 0.05 | 16.00 ± 0.30 | 4.00 ± 0.12 | 2.00 ± 0.10 | 8.00 ± 0.10 | 0.25 |

## NOTES

- Dimensions are in millimeters.
- Surface mount product is taped and reeled in accordance with EIA-481.
- Suffix - T7 = 7" Reel - 1,000 pieces per 16mm tape.
- Suffix - T13 = 13" Reel - 2,500 pieces per 16mm tape.
- Bulk product shipped in tubes of 48 pieces per tube.
- Marking on Part - part number, date code, logo and pin one defined by dot on top of package.

## ORDERING INFORMATION

| BASE PART NUMBER<br>(xx = Voltage) | LEADFREE SUFFIX | TAPE SUFFIX | QTY/REEL | REEL SIZE | TUBE QTY |
|------------------------------------|-----------------|-------------|----------|-----------|----------|
| SM16LCxx/SM16LCxxC                 | -LF             | -T7         | 1,000    | 7"        | 48       |
| SM16LCxx/SM16LCxxC                 | -LF             | -T13        | 2,500    | 13"       | 48       |

This device is only available in a Lead-Free configuration.

## COMPANY INFORMATION

---

### COMPANY PROFILE

In business more than 25 years, ProTek Devices™ is a privately held semiconductor company. The company offers a product line of overvoltage protection and overcurrent protection components. These include transient voltage suppressor array (TVS arrays) avalanche breakdown diode, steering diode TVS array and electronics SMD chip fuses. These components deliver circuit protection in electronic systems from numerous overvoltage and overcurrent events. They include lightning; electrostatic discharge (ESD); nuclear electromagnetic pulses (NEMP); inductive switching; and electromagnetic interference (EMI) / radio frequency interference (RFI). ProTek Devices also offers LED wafer die for ESD protection and related high frequency products. ProTek Devices is ISO 9001:2015 certified.

### CONTACT US

#### Corporate Headquarters

2929 South Fair Lane  
Tempe, Arizona 85282  
USA

#### By Telephone

General: 602-431-8101  
Sales: & Marketing: 602-414-5109  
Customer Service: 602-414-5114  
Product Technical Support: 602-414-5107

#### By Fax

General: 602-431-2288

#### By E-mail:

Asia Sales: [asiasales@protekdevices.com](mailto:asiasales@protekdevices.com)  
Europe Sales: [europesales@protekdevices.com](mailto:europesales@protekdevices.com)  
U.S. Sales: [ussales@protekdevices.com](mailto:ussales@protekdevices.com)  
Distributor Sales: [distysales@protekdevices.com](mailto:distysales@protekdevices.com)  
Customer Service: [service@protekdevices.com](mailto:service@protekdevices.com)  
Technical Support: [support@protekdevices.com](mailto:support@protekdevices.com)

#### ProTek Devices (Asia Pacific) Pte. Ltd.

8 Ubi Road 2, #06-19  
Zervex  
Singapore - 408538  
Tel: +65-67488312  
Fax: +65-67488313

#### Web

[www.protekdevices.com](http://www.protekdevices.com)

COPYRIGHT © ProTek Devices 2000 - This literature is subject to all applicable copyright laws and is not for resale in any manner.

SPECIFICATIONS: ProTek reserves the right to change the electrical and or mechanical characteristics described herein without notice.

DESIGN CHANGES: ProTek reserves the right to discontinue product lines without notice and that the final judgement concerning selection and specifications is the buyer's and that in furnishing engineering and technical assistance. ProTek assumes no responsibility with respect to the selection or specifications of such products. ProTek makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ProTek assume any liability arising out of the application or use of any product or circuit and specifically disclaims any and all liability without limitation special, consequential or incidental damages.

LIFE SUPPORT POLICY: ProTek Devices products are not authorized for use in life support systems without written consent from the factory.