

### Absolute Maximum Ratings

• For ratings of individual members of a series, see Device Ratings and Specifications chart

| Continuous                                                                           | TMOV® and iTMOV® Varistor Series | Units |
|--------------------------------------------------------------------------------------|----------------------------------|-------|
| Steady State Applied Voltage                                                         |                                  |       |
| AC Voltage Range ( $V_{M(ACRMS)}$ )                                                  | 115 to 750                       | V     |
| Transient                                                                            |                                  |       |
| Peak Pulse Current ( $I_{TM}$ ) - For 8x20µs Current Wave, single pulse              | 6,000 to 10,000                  | A     |
| Single-Pulse Energy Capability - For 2ms Current Wave                                | 35 to 480                        | J     |
| Operating Ambient Temperature Range ( $T_A$ )                                        | -55 to +85                       | °C    |
| Storage Temperature Range ( $T_{STG}$ )                                              | -55 to +125                      | °C    |
| Temperature Coefficient (αV) of Clamping Voltage ( $V_C$ ) at Specified Test Current | <0.01                            | %/°C  |
| Hi-Pot Encapsulation (COATING Isolation Voltage Capability)                          | 2,500                            | V     |
| Thermal Protection Isolation Voltage Capability (when operated)                      | 600                              | V     |
| COATING Insulation Resistance                                                        | 1,000                            | MΩ    |
| Indicator Lead Rating (Lead-3 - iTMOV® varistor only):                               |                                  |       |
| Continuous RMS current                                                               | 100                              | mA    |
| Surge Current, 8/20µs                                                                | 10,000                           | A     |

**CAUTION:** Stresses above those listed in "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress only rating and operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied.


### Ratings & Specifications

| TMOV® Varistor<br>Lead-free And RoHS<br>Compliant Models |          | iTMOV® Varistor<br>Lead-free and RoHS<br>Compliant Models |          | Disc<br>Diameter | Maximum Rating (85°C) |                    |                 |                                   |                                   | Specifications (25°C)                         |                    |                                          |          |                                         |
|----------------------------------------------------------|----------|-----------------------------------------------------------|----------|------------------|-----------------------|--------------------|-----------------|-----------------------------------|-----------------------------------|-----------------------------------------------|--------------------|------------------------------------------|----------|-----------------------------------------|
|                                                          |          |                                                           |          |                  | Continuous            |                    | Transient       |                                   |                                   | Varistor<br>Voltage at<br>1mA Test<br>Current |                    | Maximum<br>Clamping<br>Voltage<br>8/20µs |          | Typical<br>Capaci-<br>tance<br>f = 1MHz |
|                                                          |          |                                                           |          |                  | AC<br>Volts           | DC<br>Volts        | Energy<br>2ms   | Peak Surge Current<br>8/20µs      |                                   | $V_{N(DC)}$<br>Min                            | $V_{N(DC)}$<br>Max | $V_C$                                    | $I_{PK}$ |                                         |
| Part<br>Number                                           | Branding | Part<br>Number                                            | Branding | (mm)             | $V_{M(ACRMS)}$<br>(V) | $V_{M(DC)}$<br>(V) | $W_{TM}$<br>(J) | $I_{TM} 1 \times$<br>Pulse<br>(A) | $I_{TM} 2 \times$<br>Pulse<br>(A) | (V)                                           |                    | (V)                                      | (A)      | C<br>(pF)                               |
| TMOV14RP115E                                             | P4T115E  | TMOV14RP115M                                              | P4T115M  | 14               | 115                   | 150                | 35              | 6000                              | 4500                              | 162                                           | 198                | 300                                      | 50       | 1100                                    |
| TMOV20RP115E                                             | P2T115E  | TMOV20RP115M                                              | P2T115M  | 20               | 115                   | 150                | 52              | 10000                             | 6500                              | 162                                           | 198                | 300                                      | 100      | 2400                                    |
| TMOV14RP130E                                             | P4T130E  | TMOV14RP130M                                              | P4T130M  | 14               | 130                   | 170                | 50              | 6000                              | 4500                              | 184.5                                         | 225.5              | 340                                      | 50       | 1000                                    |
| TMOV20RP130E                                             | P2T130E  | TMOV20RP130M                                              | P2T130M  | 20               | 130                   | 170                | 100             | 10000                             | 6500                              | 184.5                                         | 225.5              | 340                                      | 100      | 1900                                    |
| TMOV14RP140E                                             | P4T140E  | TMOV14RP140M                                              | P4T140M  | 14               | 140                   | 180                | 55              | 6000                              | 4500                              | 198                                           | 242                | 360                                      | 50       | 900                                     |
| TMOV20RP140E                                             | P2T140E  | TMOV20RP140M                                              | P2T140M  | 20               | 140                   | 180                | 110             | 10000                             | 6500                              | 198                                           | 242                | 360                                      | 100      | 1750                                    |
| TMOV14RP150E                                             | P4T150E  | TMOV14RP150M                                              | P4T150M  | 14               | 150                   | 200                | 60              | 6000                              | 4500                              | 216                                           | 264                | 395                                      | 50       | 800                                     |
| TMOV20RP150E                                             | P2T150E  | TMOV20RP150M                                              | P2T150M  | 20               | 150                   | 200                | 120             | 10000                             | 6500                              | 216                                           | 264                | 395                                      | 100      | 1600                                    |
| TMOV14RP175E                                             | P4T175E  | TMOV14RP175M                                              | P4T175M  | 14               | 175                   | 225                | 70              | 6000                              | 4500                              | 243                                           | 297                | 455                                      | 50       | 700                                     |
| TMOV20RP175E                                             | P2T175E  | TMOV20RP175M                                              | P2T175M  | 20               | 175                   | 225                | 135             | 10000                             | 6500                              | 243                                           | 297                | 455                                      | 100      | 1400                                    |
| TMOV14RP200E                                             | P4T200E  | TMOV14RP200M                                              | P4T200M  | 14               | 200                   | 260                | 75              | 6000                              | 4500                              | 283                                           | 345                | 530                                      | 50       | 630                                     |
| TMOV20RP200E                                             | P2T200E  | TMOV20RP200M                                              | P2T200M  | 20               | 200                   | 260                | 154             | 10000                             | 6500                              | 283                                           | 345                | 530                                      | 100      | 1250                                    |
| TMOV14RP230E                                             | P4T230E  | TMOV14RP230M                                              | P4T230M  | 14               | 230                   | 300                | 80              | 6000                              | 4500                              | 324                                           | 396                | 595                                      | 50       | 550                                     |
| TMOV20RP230E                                             | P2T230E  | TMOV20RP230M                                              | P2T230M  | 20               | 230                   | 300                | 160             | 10000                             | 6500                              | 324                                           | 396                | 595                                      | 100      | 1100                                    |
| TMOV14RP250E                                             | P4T250E  | TMOV14RP250M                                              | P4T250M  | 14               | 250                   | 320                | 100             | 6000                              | 4500                              | 351                                           | 429                | 650                                      | 50       | 500                                     |
| TMOV20RP250E                                             | P2T250E  | TMOV20RP250M                                              | P2T250M  | 20               | 250                   | 320                | 170             | 10000                             | 6500                              | 351                                           | 429                | 650                                      | 100      | 1000                                    |
| TMOV14RP275E                                             | P4T275E  | TMOV14RP275M                                              | P4T275M  | 14               | 275                   | 350                | 110             | 6000                              | 4500                              | 387                                           | 473                | 710                                      | 50       | 450                                     |
| TMOV20RP275E                                             | P2T275E  | TMOV20RP275M                                              | P2T275M  | 20               | 275                   | 350                | 190             | 10000                             | 6500                              | 387                                           | 473                | 710                                      | 100      | 900                                     |
| TMOV14RP300E                                             | P4T300E  | TMOV14RP300M                                              | P4T300M  | 14               | 300                   | 385                | 125             | 6000                              | 4500                              | 423                                           | 517                | 775                                      | 50       | 400                                     |
| TMOV20RP300E                                             | P2T300E  | TMOV20RP300M                                              | P2T300M  | 20               | 300                   | 385                | 250             | 10000                             | 6500                              | 423                                           | 517                | 775                                      | 100      | 800                                     |
| TMOV14RP320E                                             | P4T320E  | TMOV14RP320M                                              | P4T320M  | 14               | 320                   | 420                | 136             | 6000                              | 4500                              | 459                                           | 561                | 840                                      | 50       | 380                                     |
| TMOV20RP320E                                             | P2T320E  | TMOV20RP320M                                              | P2T320M  | 20               | 320                   | 420                | 270             | 10000                             | 6500                              | 459                                           | 561                | 840                                      | 100      | 750                                     |
| TMOV14RP385E                                             | P4T385E  | TMOV14RP385M                                              | P4T385M  | 14               | 385                   | 505                | 150             | 6000                              | 4500                              | 558                                           | 682                | 1025                                     | 50       | 360                                     |
| TMOV20RP385E                                             | P2T385E  | TMOV20RP385M                                              | P2T385M  | 20               | 385                   | 505                | 300             | 10000                             | 6500                              | 558                                           | 682                | 1025                                     | 100      | 700                                     |
| TMOV14RP420E                                             | P4T420E  | TMOV14RP420M                                              | P4T420M  | 14               | 420                   | 560                | 160             | 6000                              | 4500                              | 612                                           | 748                | 1120                                     | 50       | 300                                     |
| TMOV20RP420E                                             | P2T420E  | TMOV20RP420M                                              | P2T420M  | 20               | 420                   | 560                | 320             | 10000                             | 6500                              | 612                                           | 748                | 1120                                     | 100      | 600                                     |
| TMOV14RP460E                                             | P4T460E  | TMOV14RP460M                                              | P4T460M  | 14               | 460                   | 610                | 180             | 6000                              | 4500                              | 675                                           | 825                | 1240                                     | 50       | 220                                     |
| TMOV20RP460E                                             | P2T460E  | TMOV20RP460M                                              | P2T460M  | 20               | 460                   | 610                | 360             | 10000                             | 6500                              | 675                                           | 825                | 1240                                     | 100      | 200                                     |
| TMOV14RP510E                                             | P4T510E  | TMOV14RP510M                                              | P4T510M  | 14               | 510                   | 670                | 185             | 6000                              | 4500                              | 738                                           | 902                | 1355                                     | 50       | 200                                     |
| TMOV20RP510E                                             | P2T510E  | TMOV20RP510M                                              | P2T510M  | 20               | 510                   | 670                | 325             | 10000                             | 6500                              | 738                                           | 902                | 1355                                     | 100      | 350                                     |
| TMOV14RP550E                                             | P4T550E  | TMOV14RP550M                                              | P4T550M  | 14               | 550                   | 715                | 190             | 6000                              | 4500                              | 819                                           | 1001               | 1500                                     | 50       | 180                                     |
| TMOV20RP550E                                             | P2T550E  | TMOV20RP550M                                              | P2T550M  | 20               | 550                   | 715                | 360             | 10000                             | 6500                              | 819                                           | 1001               | 1500                                     | 100      | 300                                     |

### Ratings & Specifications


| TMOV® Varistor<br>Lead-free And RoHS<br>Compliant Models |          | iTMOV® Varistor<br>Lead-free And RoHS<br>Compliant Models |          | Disc<br>Diameter<br><br>(mm) | Maximum Rating (85°C) |                    |                 |                              |                              | Specifications (25°C)                   |                        |                                       |                 |                                         |
|----------------------------------------------------------|----------|-----------------------------------------------------------|----------|------------------------------|-----------------------|--------------------|-----------------|------------------------------|------------------------------|-----------------------------------------|------------------------|---------------------------------------|-----------------|-----------------------------------------|
|                                                          |          |                                                           |          |                              | Continuous            |                    | Transient       |                              |                              | Varistor Voltage at<br>1mA Test Current |                        | Maximum<br>Clamping Voltage<br>8/20µs |                 | Typical<br>Capaci-<br>tance<br>f = 1MHz |
|                                                          |          |                                                           |          |                              | AC<br>Volts           | DC<br>Volts        | Energy<br>2ms   | Peak Surge<br>Current 8/20µs |                              |                                         |                        |                                       |                 |                                         |
| Part<br>Number                                           | Branding | Part<br>Number                                            | Branding |                              | V <sub>M(AC)RMS</sub> | V <sub>M(DC)</sub> | W <sub>TM</sub> | I <sub>TM</sub> 1 x<br>Pulse | I <sub>TM</sub> 2 x<br>Pulse | V <sub>N(DC)</sub> Min                  | V <sub>N(DC)</sub> Max | V <sub>C</sub>                        | I <sub>PK</sub> | C                                       |
| TMOV14RP575E                                             | P4T575E  | TMOV14RP575M                                              | P4T575M  | 14                           | 575                   | 730                | 195             | 6000                         | 4500                         | 857                                     | 1047                   | 1568                                  | 50              | 170                                     |
| TMOV20RP575E                                             | P2T575E  | TMOV20RP575M                                              | P2T575M  | 20                           | 575                   | 730                | 375             | 10000                        | 6500                         | 857                                     | 1047                   | 1568                                  | 100             | 275                                     |
| TMOV14RP625E                                             | P4T625E  | TMOV14RP625M                                              | P4T625M  | 14                           | 625                   | 825                | 200             | 6000                         | 4500                         | 900                                     | 1100                   | 1650                                  | 50              | 160                                     |
| TMOV20RP625E                                             | P2T625E  | TMOV20RP625M                                              | P2T625M  | 20                           | 625                   | 825                | 400             | 10000                        | 6500                         | 900                                     | 1100                   | 1650                                  | 100             | 250                                     |
| TMOV14RP750E                                             | P4T750E  | TMOV14RP750M                                              | P4T750M  | 14                           | 750                   | 970                | 210             | 6000                         | 4500                         | 1080                                    | 1320                   | 1980                                  | 50              | 140                                     |
| TMOV20RP750E                                             | P2T750E  | TMOV20RP750M                                              | P2T750M  | 20                           | 750                   | 970                | 480             | 10000                        | 6500                         | 1080                                    | 1320                   | 1980                                  | 100             | 175                                     |

Figure 1. Thermal Characteristics

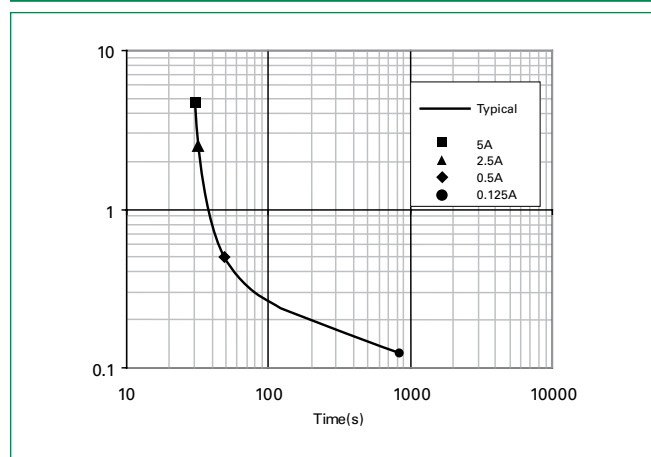

Note : The TMOV® and iTMOV® varistors are intended, in conjunction with appropriate enclosure design, to help facilitate SPD module compliance to UL 1449, 3rd Edition Section 39.4 (abnormal overvoltage limited current requirements). Under these extreme abnormal overvoltage conditions, some units will exhibit substantial heating, arcing and venting prior to opening. Modules should be designed to contain this possibility. Application testing is strongly recommended.

Figure 2. Current, Energy, Power Derating Curve

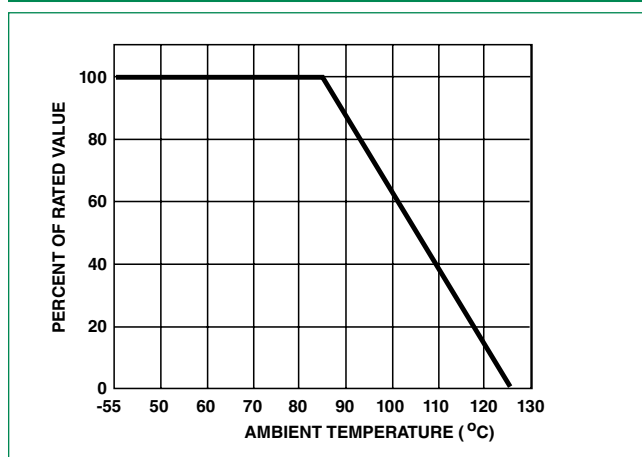

For applications exceeding 85°C ambient temperature, the peak surge current and energy ratings must be reduced as shown above.

Figure 3. Maximum Clamping Voltage for 14mm Parts



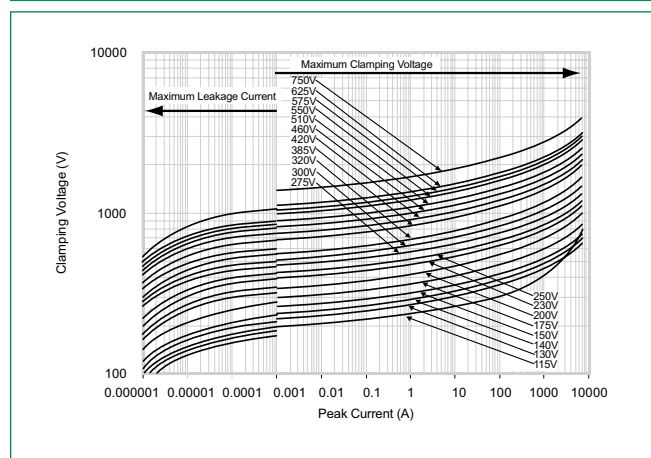


Figure 4. Maximum Clamping Voltage for 20mm Parts

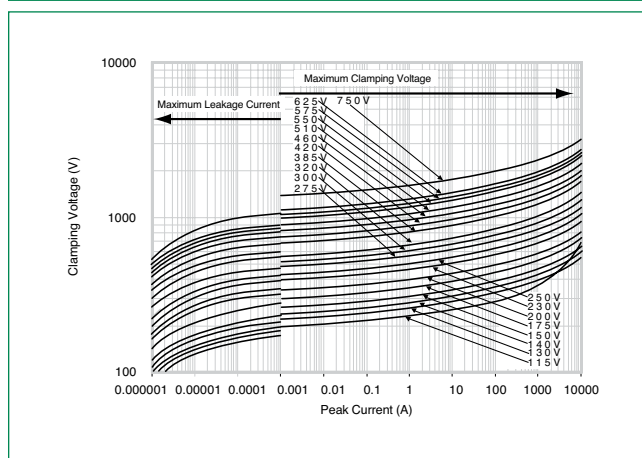


**Figure 5. Repetitive Surge Capability for 14mm Parts**

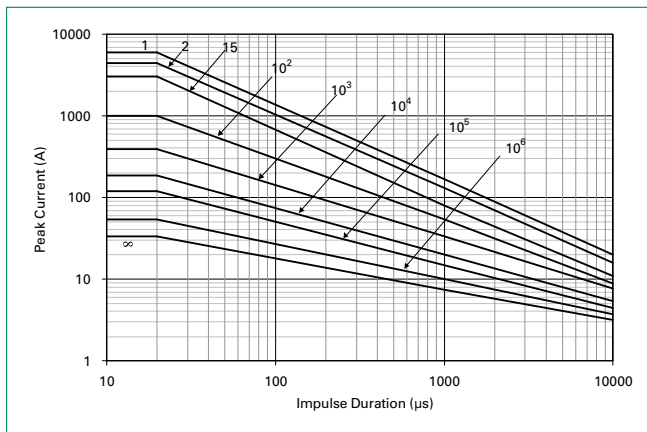

**Note:** Average power dissipation of transients should not exceed 0.6W

**Note:** Repetitive surge capability is qualified and tested based on 8/20μs current waveform (not combination waveform) and UL1449 40.7.3 (Edition 4) test condition

**Figure 6. Repetitive Surge Capability for 20mm Parts**

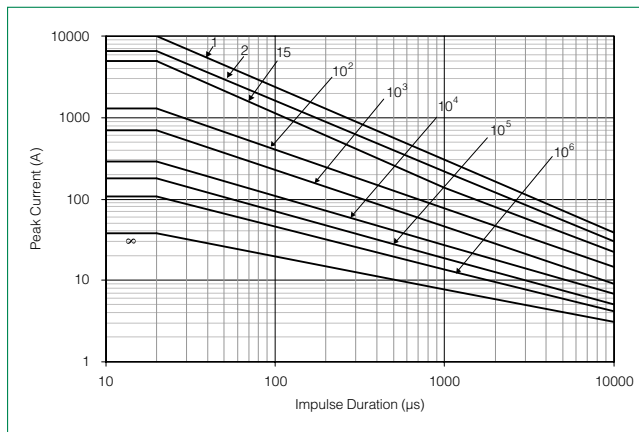


**Note:** Average power dissipation of transients should not exceed 1.0W


### Wave Solder Profile

Because the TMOV® and iTMOV® varistors contain a thermal protection device, care must be taken when soldering the devices into place. Two soldering methods are possible. Firstly, hand soldering: It is recommended to heat-sink the leads of the device. Secondly, wave soldering: It is critically important that all preheat stage and the solder bath temperatures are rigidly controlled.

**Figure 7. Non Lead-free Profile**

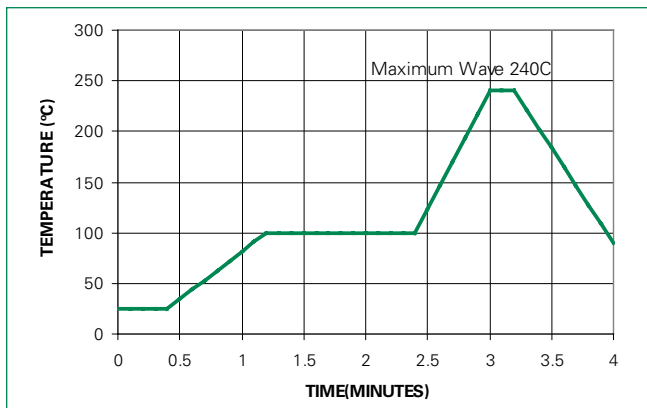

**Figure 8. Lead-free Profile**

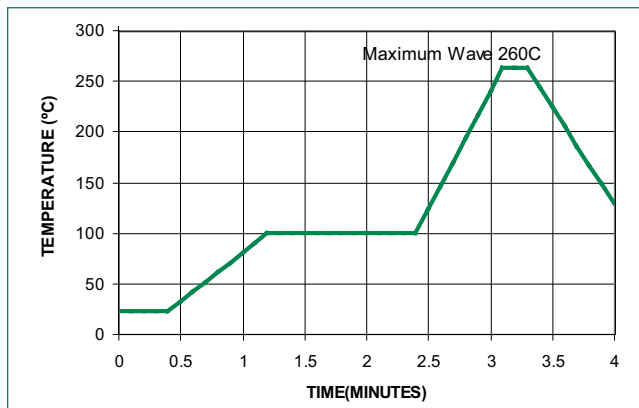



### Physical Specifications

|                                  |                                                                  |
|----------------------------------|------------------------------------------------------------------|
| <b>Lead Material</b>             | Copper clad steel wire                                           |
| <b>Soldering Characteristics</b> | Solderability per MIL-STD-202, Method 208                        |
| <b>Insulating Material</b>       | Cured, flame retardant epoxy polymer meets UL94 V-0 requirements |
| <b>Device Labeling</b>           | Marked with LF, voltage, UL/CSA logos, and date code             |

### Environmental Specifications

|                                      |                                                            |
|--------------------------------------|------------------------------------------------------------|
| <b>Operating/Storage Temperature</b> | -55°C to +85°C                                             |
| <b>Humidity Aging</b>                | +85°C, 85% RH, 1000 hours<br>+/-10% typical voltage change |
| <b>Thermal Shock</b>                 | +85°C to -55°C 5 times<br>+/-10% typical voltage change    |
| <b>Solvent Resistance</b>            | MIL-STD-202, Method 215                                    |
| <b>Moisture Sensitivity</b>          | Level 1, J-STD-020                                         |

### Lead Configurations

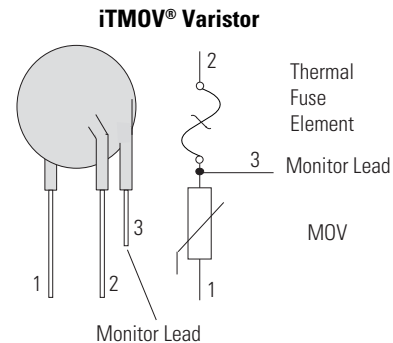


**Note:** MOVs are non-polarized passive elements

### iTMOV® Varistor Application Examples

The application examples below show how the indicator lead on the iTMOV® varistor can be used to indicate that the thermal element has been opened. This signifies that the circuit is no longer protected from transients by the MOV.


#### Application Example 1

In this case, the LED is normally on, and is off when the thermal element opens.

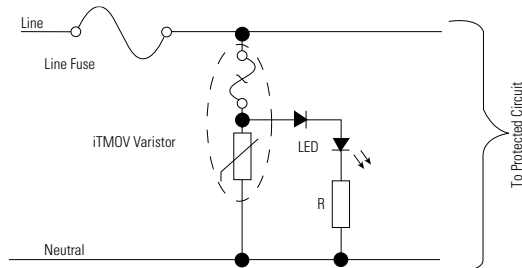


#### Application Example 2

This circuit utilizes an optocoupler to provide galvanic isolations between the iTMOV® varistor and the indicating or alarm circuitry.

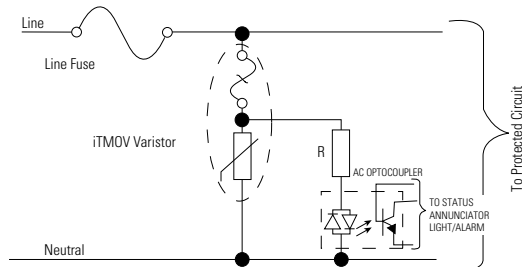


#### Application Example 3

This circuit illustrates the use of the monitoring lead of the iTMOV® varistor to ensure that equipment is only operated when overvoltage protection present. In normal operation the load switch relay solenoid is powered via the indicator lead of the iTMOV® varistor. In the event of the thermal element being activated, the relay will de-activate, cutting power to the protected circuit and the fault LED will illuminate.

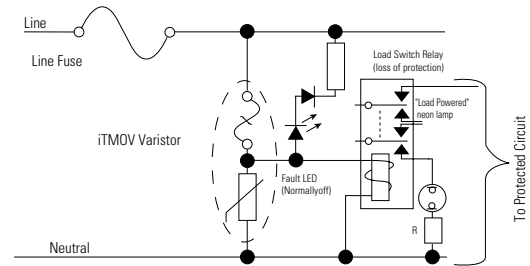

Please note: Indicator circuits are provided as a guideline only. Verification of actual indicator circuitry is the responsibility of the end user. Component values selected must be appropriate for the specific AC line voltage service and application.

### Device Dimensions

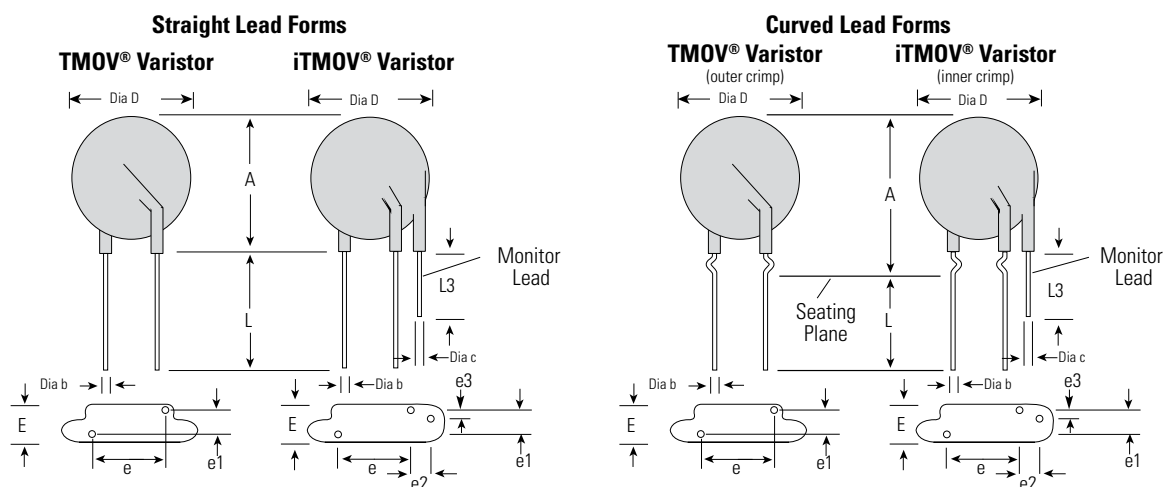


| Dimension                                                | V <sub>RMS</sub><br>Voltage<br>Model | TMOV® Varistor  |                 |                 |                 | iTMOV® Varistor |                 |                 |                 |
|----------------------------------------------------------|--------------------------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
|                                                          |                                      | 14mm Size       |                 | 20mm Size       |                 | 14mm Size       |                 | 20mm Size       |                 |
|                                                          |                                      | Min.<br>mm (in) | Max.<br>mm (in) | Min.<br>mm (in) | Max.<br>mm (in) | Min.<br>mm (in) | Max.<br>mm (in) | Min.<br>mm (in) | Max.<br>mm (in) |
| <b>A</b><br><b>Straight Lead</b>                         | ALL                                  | 17.0 (0.669)    | 22.0 (0.866)    | 23.0 (0.906)    | 28.0 (1.10)     | 17.0 (0.669)    | 22.0 (0.866)    | 23.0 (0.906)    | 28.0 (1.10)     |
| <b>A</b><br><b>Crimped Lead</b>                          | ALL                                  | —               | 22.5 (0.886)    | —               | 31.0 (1.221)    | —               | 22.5 (0.886)    | —               | 31.0 (1.221)    |
| <b>Dia D</b>                                             | ALL                                  | 13.5 (0.531)    | 17.0 (0.669)    | 19.0 (0.748)    | 23.0 (0.906)    | 13.5 (0.531)    | 17.0 (0.669)    | 19.0 (0.748)    | 23.0 (0.906)    |
| <b>e</b>                                                 | ALL                                  | 6.5 (0.256)     | 8.5 (0.335)     | 6.5 (0.256)     | 8.5 (0.335)     | 6.5 (0.256)     | 8.5 (0.335)     | 6.5 (0.256)     | 8.5 (0.335)     |
| <b>e1</b><br><b>Bulk Pack</b>                            | 115-175                              | 1.5 (0.059)     | 4.0 (0.157)     | 1.5 (0.059)     | 4.0 (0.157)     | 1.5 (0.059)     | 4.0 (0.157)     | 1.5 (0.059)     | 4.0 (0.157)     |
|                                                          | 200-275                              | 2.0 (0.079)     | 4.5 (0.177)     | 2.0 (0.079)     | 4.5 (0.177)     | 2.0 (0.079)     | 4.5 (0.177)     | 2.0 (0.079)     | 4.5 (0.177)     |
|                                                          | 300-420                              | 3.0 (0.118)     | 5.5 (0.217)     | 3.0 (0.118)     | 5.5 (0.217)     | 3.0 (0.118)     | 5.5 (0.217)     | 3.0 (0.118)     | 5.5 (0.217)     |
|                                                          | 460-750                              | 0               | 2.0 (0.079)     | 0               | 2.0 (0.079)     | 0               | 2.0 (0.079)     | 0               | 2.0 (0.079)     |
| <b>e1</b><br><b>Tape &amp; Reel and<br/>In-Line Lead</b> | 115-420                              | 0               | 2.0 (0.079)     | 0               | 2.0 (0.079)     | 0               | 2.0 (0.079)     | 0               | 2.0 (0.079)     |
|                                                          | 460-550*                             | 0               | 2.0 (0.079)     | 0               | 2.0 (0.079)     | 0               | 2.0 (0.079)     | 0               | 2.0 (0.079)     |
| <b>e2</b>                                                | ALL                                  | n/a             | n/a             | n/a             | n/a             | 4.0 (0.157)     | 6.0 (0.236)     | 4.0 (0.157)     | 6.0 (0.236)     |
| <b>e3</b>                                                | ALL                                  | n/a             | n/a             | n/a             | n/a             | 0               | 2.0 (0.079)     | 0               | 2.0 (0.079)     |
| <b>E</b>                                                 | 115-175                              | —               | 9.0 (0.354)     | —               | 9.0 (0.354)     | —               | 9.0 (0.354)     | —               | 9.0 (0.354)     |
|                                                          | 200-275                              | —               | 9.5 (0.374)     | —               | 9.5 (0.374)     | —               | 9.5 (0.374)     | —               | 9.5 (0.374)     |
|                                                          | 300-460                              | —               | 11.0 (0.433)    | —               | 11.0 (0.433)    | —               | 11.0 (0.433)    | —               | 11.0 (0.433)    |
|                                                          | 510-575                              | —               | 12.0 (0.472)    | —               | 12.0 (0.472)    | —               | 12.0 (0.472)    | —               | 12.0 (0.472)    |
|                                                          | 625-750                              | —               | 13.0 (0.512)    | —               | 13.0 (0.512)    | —               | 13.0 (0.512)    | —               | 13.0 (0.512)    |
| <b>L</b>                                                 | ALL                                  | 25.4 (1.00)     | —               | 25.4 (1.00)     | —               | 25.4 (1.00)     | —               | 25.4 (1.00)     | —               |
| <b>L3</b>                                                | ALL                                  | n/a             | n/a             | n/a             | n/a             | 6.0 (0.236)     | —               | 6.0 (0.236)     | —               |
| <b>Dia b</b>                                             | 115-420                              | 0.76 (0.030)    | 0.86 (0.034)    | 0.76 (0.030)    | 0.86 (0.034)    | 0.76 (0.030)    | 0.86 (0.034)    | 0.76 (0.030)    | 0.86 (0.034)    |
|                                                          | 460-750                              | 0.76 (0.030)    | 0.86 (0.034)    | 0.95 (0.037)    | 1.05 (0.041)    | 0.76 (0.030)    | 0.86 (0.034)    | 0.95 (0.037)    | 1.05 (0.041)    |
| <b>Dia c</b><br>Outside Lead Only                        | ALL                                  | n/a             | n/a             | n/a             | n/a             | 0.76 (0.030)    | 0.86 (0.034)    | 0.76 (0.030)    | 0.86 (0.034)    |

#### NOTES:


\* Tape and Reel packaging option is available only for devices up to 420Vrms.

### Tape and Reel Specification


iTMOV® VARISTOR WITH INNER CRIMP

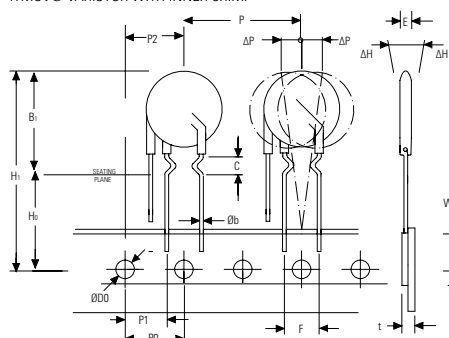


TMOV® VARISTOR WITH OUTER CRIMP

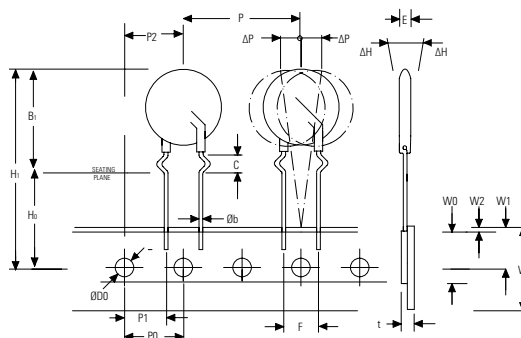

iTMOV® VARISTOR WITH STRAIGHT LEADS

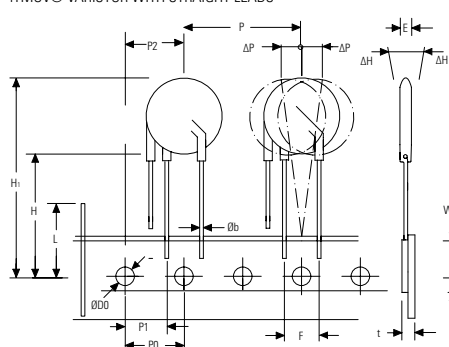

TMOV® VARISTOR WITH STRAIGHT LEADS

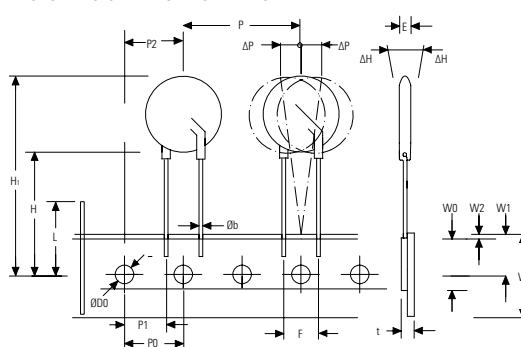


|                      | Description                                                   | Crimped Leads   |                 | Straight Leads       |                      |
|----------------------|---------------------------------------------------------------|-----------------|-----------------|----------------------|----------------------|
|                      |                                                               | Model Size      |                 | Model Size           |                      |
|                      |                                                               | 14mm            | 20mm            | 14mm                 | 20mm                 |
| <b>B<sub>1</sub></b> | Component Top to Seating Plane                                | 22.5 Max        | 31 Max          | 22.0 Max             | 28.0 Max             |
| <b>P</b>             | Pitch of Component                                            | 25.4 +/- 1.0    | 25.4 +/- 1.0    | 25.4 ±1.0            | 25.4 ±1.0            |
| <b>P<sub>0</sub></b> | Feed Hole Pitch                                               | 12.7 +/- 0.2    | 12.7 +/- 0.2    | 12.7 ±0.2            | 12.7 ±0.2            |
| <b>P<sub>1</sub></b> | Feed Hole Center to Pitch                                     | 8.95 +/- 0.7    | 8.95 +/- 0.7    | 8.95 ±0.7            | 8.95 ±0.7            |
| <b>P<sub>2</sub></b> | Hole Center to Component Center                               | 12.7 +/- 0.7    | 12.7 +/- 0.7    | 12.7 ±0.7            | 12.7 ±0.7            |
| <b>F</b>             | Lead to Lead Distance                                         | 7.5 +/- 0.8     | 7.5 +/- 0.8     | 7.5 ±0.8             | 7.5 ±0.8             |
| <b>Δh</b>            | Component Alignment                                           | 2.0 Max         | 2.0 Max         | 2.0 Max              | 2.0 Max              |
| <b>W</b>             | Tape Width                                                    | 18.0 +1.0/-0.5  | 18.0 +1.0/-0.5  | 18.0 +1.0/-0.5       | 18.0 +1.0/-0.5       |
| <b>W<sub>0</sub></b> | Hold Down Tape Width                                          | 12.0 +/- 0.3    | 12.0 +/- 0.3    | 12.0 ±0.3            | 12.0 ±0.3            |
| <b>W<sub>1</sub></b> | Hole Position                                                 | 9.0 +0.75/-0.50 | 9.0 +0.75/-0.50 | 9.0 +0.75/-0.5       | 9.0 +0.75/-0.5       |
| <b>W<sub>2</sub></b> | Hold Down Tape Position                                       | 0.5 Max         | 0.5 Max         | 0.5 Max              | 0.5 Max              |
| <b>H</b>             | Height from Tape Centre to Component Base (non-crimped parts) | —               | —               | 18.0 +2.0/-0         | 18.0 +2.0/-0         |
| <b>H<sub>0</sub></b> | Seating Plane Height (crimped parts only)                     | 16.0 +/- 0.5    | 16.0 +/- 0.5    | —                    | —                    |
| <b>H<sub>1</sub></b> | Component Height                                              | 40.0 Max        | 46.5 Max        | 40.0 Max             | 46.5 Max             |
| <b>C</b>             | Crimp Length (crimped parts only)                             | 2.6 typ         | 2.6 typ         | —                    | —                    |
| <b>D<sub>0</sub></b> | Feed Hole Diameter                                            | 4.0 +/- 0.2     | 4.0 +/- 0.2     | 4.0 ±0.2             | 4.0 ±0.2             |
| <b>t</b>             | Total Tape Thickness                                          | 0.7 +/- 0.2     | 0.7 +/- 0.2     | 0.7 ±0.2             | 0.7 ±0.2             |
| <b>L</b>             | Length of Clipped Lead                                        | 11.0 Max        | 11.0 Max        | 11.0 Max             | 11.0 Max             |
| <b>Δp</b>            | Component Alignment                                           | 3 Max. 1.00mm   | 3 Max           | 3 deg Max, 1.0mm Max | 3 deg Max, 1.0mm Max |

#### NOTES:

- Dimensions in mm
- Reel capacity varies with voltage.
- Leads are crimped and in-line. This excludes the monitor lead on iTMOV® varistor which are not crimped and not in-line.
- To order tape and reel option please add suffix 'L217' to end of standard part number.
- Tape and reel option is available for rated voltages up to 420V. Contact factory regarding availability of higher voltages.
- Contact Littelfuse for additional details.

### Part Numbering System

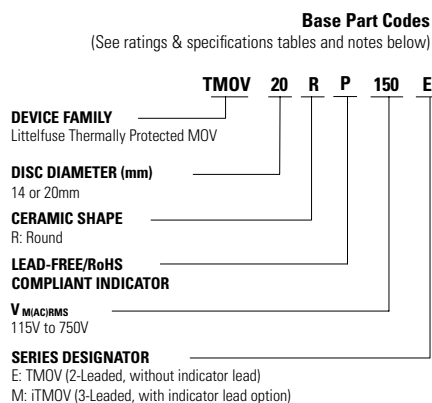

### Option Codes<sup>1</sup>

(See below)

**XXXXX**

#### NON-STANDARD LEAD FORM, PACKAGING and LEAD SPACING OPTIONS<sup>1</sup>:

- L2B7: Lead Form: Crimped and In-Line<sup>2</sup> Leads  
Packaging: Bulk Pack  
Lead Spacing<sup>3</sup>: 7.5mm
- L2T7: Lead Form: Crimped and In-Line<sup>2</sup> Leads  
Packaging: Tape and Reel<sup>4</sup>  
Lead Spacing<sup>3</sup>: 7.5mm
- L3T7: Lead Form: Straight Leads and In-Line<sup>2</sup> Leads  
Packaging: Tape and Reel  
Lead Spacing<sup>3</sup>: 7.5mm

#### Option Codes:

X2855: Nickel Barrier coated wire option --  
All standard parts use tinned copper clad steel wire.  
Nickel Barrier coated wire is available as an option,  
consisting of Copper wire with a flashing of Nickel  
followed by a top coating of Tin. To order append standard  
model BASE PART number with "X2855." Example:

| Standard Model | Order As          |
|----------------|-------------------|
| TMOV20RP115E   | TMOV20RP115EX2855 |

Other non-standard options may be available - please contact Littelfuse.

#### NOTES:

- 1 Use Base Part Code only to receive standard product:  
Lead Form: Straight Leads. Devices greater than 420Vrms are provided In-Line<sup>2</sup>.  
Packaging: Bulk Pack  
Lead Spacing: 7.5mm +/-1.0mm
- 2 "In-Line" refers to straight row of leads at the tip where product is to contact the circuit board. Refer to "e1" in Device Dimensions section.
- 3 Lead Spacing refers to span between leads as "e" dimension in Device Dimensions section.

### Pack Quantities

| Rated Voltage | Pack Quantities |      |               |      |
|---------------|-----------------|------|---------------|------|
|               | Bulk Pack       |      | Tape and Reel |      |
|               | Model Size      |      | Model Size    |      |
|               | 14mm            | 20mm | 14mm          | 20mm |
| 115-250       | 600             | 400  | 500           | 400  |
| 275-550       | 500             | 300  | 400           | 300  |
| 575-750       | 400             | 200  | n/a           | n/a  |

**NOTE:** Tape and Reel available up to 420V only - please contact factory regarding availability of higher voltage parts.

**Disclaimer Notice** - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at [www.littelfuse.com/disclaimer-electronics](http://www.littelfuse.com/disclaimer-electronics).