




CC2824E474R-10

**UNCONTROLLED
DOCUMENT**

ELECTRICAL SPECIFICATION @ 25°C
OPERATING TEMPERATURE RANGE: -40°C TO +125°C

PARAMETER SYMBOL	TEST LEADS	CONDITIONS	REQUIREMENTS		
			MIN	TYP	MAX
Lp (μH)	1-4/2-3	@ 100KHz/ 10mV	282	470	658
L LEAKAGE (μH)	1-4 (s' 2-3)	@ 100KHz/ 10mV		0.20	
TRP			1 : 1 +/- 5%		
DCR(Ω)	1-4/2-3			0.20	0.26
Hi-pot	wdg-wdg	(Vac) .5mA, 2sec.	750		
RATED CURRENT (mA)					700
RATED VOLTAGE (Vdc)					80

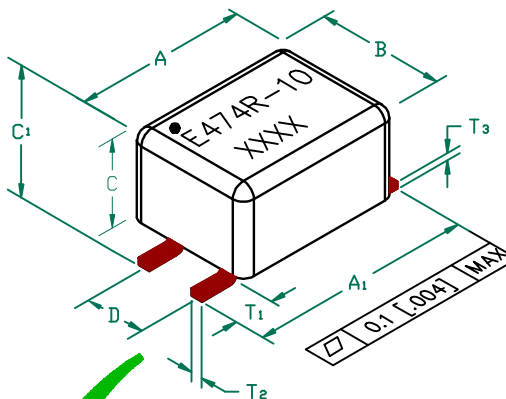


PHYSICAL DIMENSIONS:

A	7.50	[.295]	+	MAX.
A ₁	9.00	[.354]	+	0.40 [.016]
B	5.50	[.217]	+	MAX.
C	3.80	[.150]	+	MAX.
C ₁	4.90	[.193]	+	MAX.
D	2.54	[.100]	+	0.10 [.004]
T ₁	1.75	[.069]	+	TYP.
T ₂	0.50	[.020]	+	0.10 [.004]
T ₃	0.30	[.012]	+	0.10 [.004]


WEIGHT/1000 0.28 kgs [.62 Lbs]

NOTES: UNLESS OTHERWISE SPECIFIED


1. TAPED AND REELED ON 13" REELS, 1500 PCS/REEL.
2. OPEN BOTTOM CONSTRUCTION.




Typical Insertion Loss @ 50 ohm

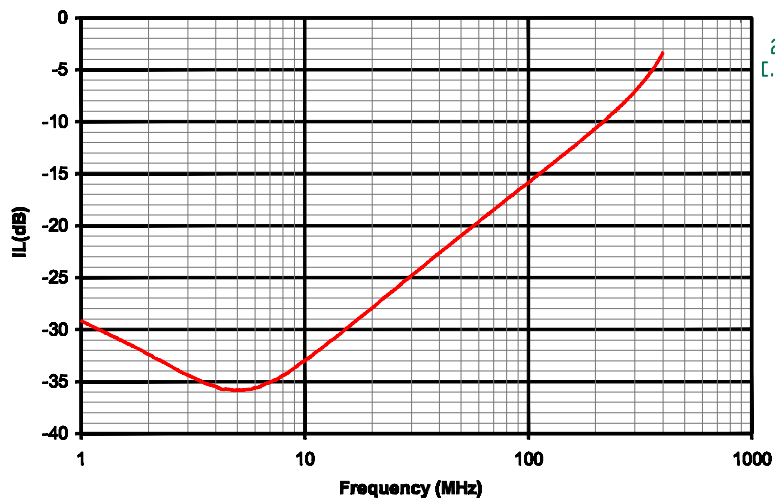

LAND PATTERNS FOR REFLOW SOLDERING

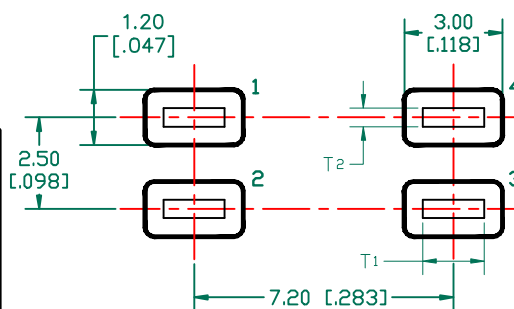

RECOMMENDED SOLDERING CONDITIONS

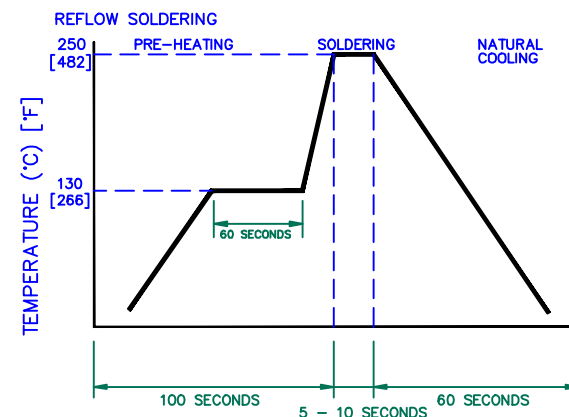

DIMENSIONS ARE IN mm [INCHES]				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.			
F	ADD RATING VOLTAGE	07/25/13	QIU	Laird			
E	CHANGE THE INDUCTANCE TEST VOLTAGE	03/11/10	JUN				
D	UPDATE COMPANY LOGO	04/09/09	JRK				
C	UPDATE COMPANY LOGO	05/09/07	JRK				
B	CHANGE L SPECS	01/18/06	JRK				
A	ORIGINAL DRAFT	06/08/05	JRK	PROJECT/PART NUMBER:	CC2824E474R-10	REV F	PART TYPE: ASSEMBLY
REV	DESCRIPTION	DATE	INT	DATE:	06/08/05	SCALE:	NTS
				CAD #	CC2824E474R-10-F	SHEET:	1 of 1